

Pact Series
MasterPact™ MTZ
Substitution and technical guide

2019
Air circuit breakers
and switch-disconnectors





...SUSTAINABILITY READY

Contribute to a better world — with MasterPact MTZ circuit breakers you can enhance sustainability.

Build superior sustainable and efficient properties by reducing CO₂ emissions, utility and operating costs as well as improving the well-being of property occupants for both new construction and renovation projects.



Achieve Green Building certification with MasterPact MTZ:

In compliance with ISO 14025 PEP Ecopassport program, Schneider Electric publishes a comprehensive Life Cycle Analysis of our product, providing the environmental data you need to achieve Green Building certifications.



For example, MasterPact MTZ contributes to 4 LEED™ points:

- Building Product Disclosure and Optimization
- Advanced Energy Metering



Circular performance



Resource performance



Well-being performance

With the addition of digital modules, the circuit breaker can be upgraded and modernized at any time after installation without disrupting electrical service.

Better durability with improved mechanical and electrical performance along with remote monitoring to help facilitate predictive maintenance.

The embedded class 1 metering allows active power and energy to be monitored, helping facility managers reduce their CO₂ emissions and energy costs when connected to any building and energy management system.

MasterPact MTZ is fully RoHS and REACH compliant.



Experience the difference today at schneider-electric.com/green-premium

The following substitution guide applies to substitution of non communicating standard circuit breakers only ^[1].

Schneider Electric specialists are available to support and upgrade current installation with latest communicating solution.

[1] Offers not included in this guide : MasterPact NT/NW with communication, MasterPact NW Anticorrosion, MasterPact NW DC, MasterPact NW UR, MasterPact NT02/NW02 [250 A], MasterPact NW Earthing Switch, Micrologic P and Micrologic H.



General Contents

MasterPact MTZ

Characteristics

> Pages 2 to 7

A

Installation recommendations

> Pages 8 and 9

B

MasterPact M modernisation

> Page 10

C

Dimensions

> Pages 11 to 13

D

Accessories

> Pages 14 to 18

E

Substitution table: catalogue numbers

> Pages 19 to 37

F

Substitution table: spare parts

> Pages 38 to 44

G

Performance levels and trip units


From MasterPact NT...

> One frame size > 3 performance levels >>

A



MasterPact NT
630/800/1000/1250/1600

H1, H2, L1 (@ 415 V, for networks < 690 V)

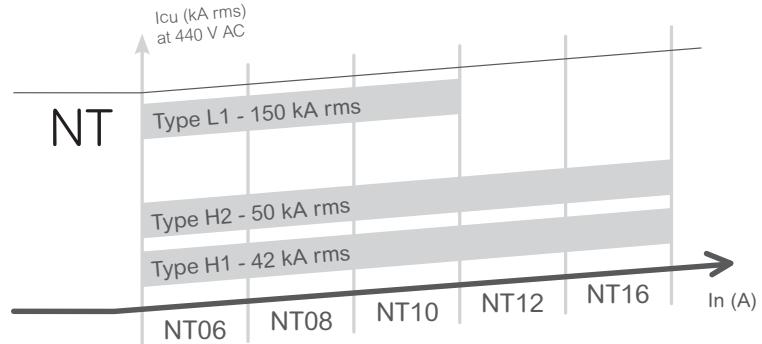

> MicroLogic A/E [1] Control Units for MasterPact NT
Current protection

MicroLogic 2.0: basic protection

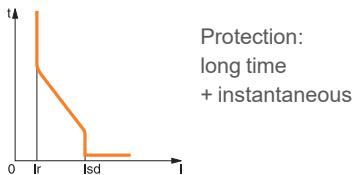

> Measurements and programmable protection



A: ammeter

I_1 , I_2 , I_3 , IN , earth-fault, leakage-leakage and maximeter for these measurements fault indications settings in amperes and in seconds.



E: Energy

incorporates all the rms measurements of MicroLogic A, plus voltage, power factor, power and energy metering measurements calculates value "Quickview" function for the automatic cyclical display of the most useful values (as standard or by selection).


MicroLogic 5.0: selective protection



MicroLogic 6.0: selective + earth-fault protection

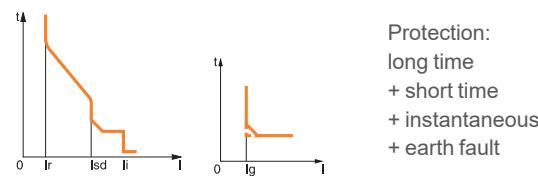

MicroLogic 7.0: selective + earth-leakage protection

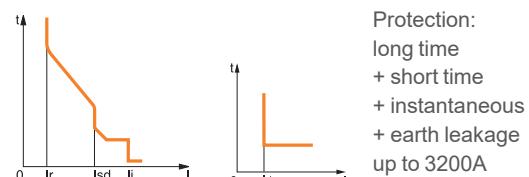

[1] Not compatible with MasterPact MTZ.

Performance levels and trip units


... to MasterPact MTZ1

..... > One identical frame size [2] > 4 performance levels

MasterPact MTZ1
630/800/1000/1250/1600




New MicroLogic X range with certified built-in metering and diagnostics functions (incl.wireless)

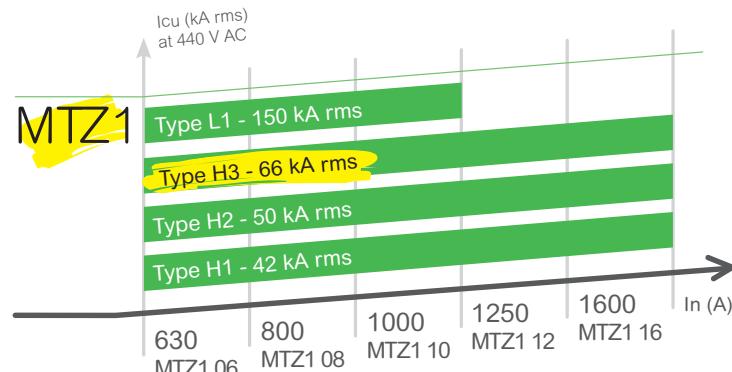

> MicroLogic X [3][4] Control Units for MasterPact MTZ1 Protection for ...

...MicroLogic 2.0X

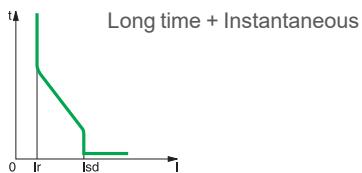

Common characteristics for all MicroLogic X


> Measurement

MicroLogic X performs the measurement of all electrical parameters of an electrical network: Currents, voltages, frequency, power, energy & power factor. Min/Max and average values are elaborated for most of the parameters. Optional digital modules allows the measure of energy per phase and wave form capture.

Including Wireless technology allowing to Easy read information with EcoStruxure Power Device Operate App



...MicroLogic 5.0X




> Diagnostic


The diagnostics allows to limit the risk of power interruptions and to re-energize the installation as quick as possible after a trip. They provide warnings and messages to help the user in scheduling both preventive and predictive maintenance and device replacement as well.

Note: For futher details on measurement and diagnostic, see Chapter B of MasterPact MTZ catalogue.

... MicroLogic 6.0X

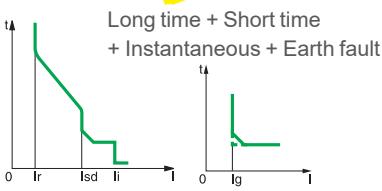

... MicroLogic 7.0X

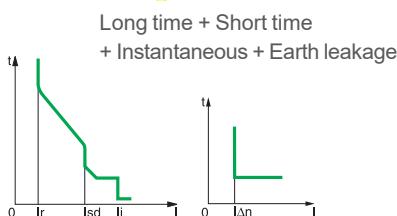

[2] Same physical dimensions to install in most of cubicles (but +3 mm on depth only front cover).

[3] Except demand readings.

[4] Not compatible with MasterPact NT.


Performance levels and trip units

From MasterPact NW08 / NW40...

> One frame size > 5 performance levels

MasterPact NW800/1000/1250/
1600/2000/2500/3200/4000

N1, H1, H2, H3, L1 (@ 415 V, for networks < 690 V)

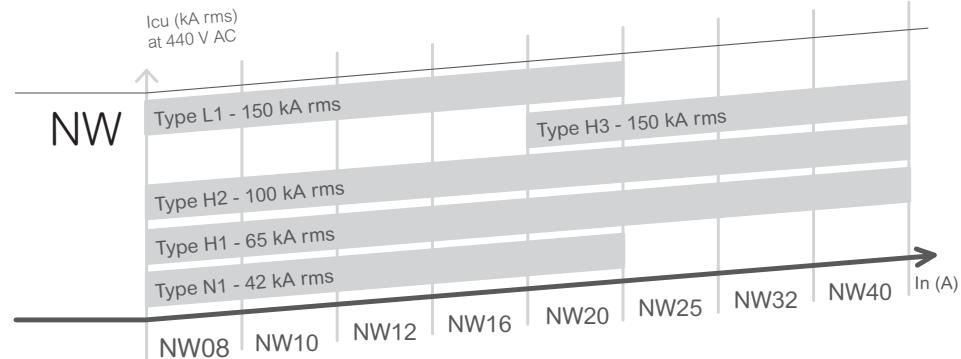


> MicroLogic A/E Control Units for MasterPact NW [1]

Current protection



MicroLogic 2.0: basic protection

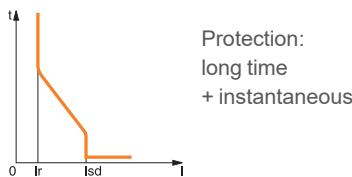

> Measurements and programmable protection



A: ammeter

I1, I2, I3, IN, earth-fault, leakage-leakage and maximeter for these measurements fault indications settings in amperes and in seconds.



E: Energy

incorporates all the rms measurements of MicroLogic A, plus voltage, power factor, power and energy metering measurements calculates value "Quickview" function for the automatic cyclical display of the most useful values (as standard or by selection).


MicroLogic 5.0: selective protection



MicroLogic 6.0: selective + earth-fault protection

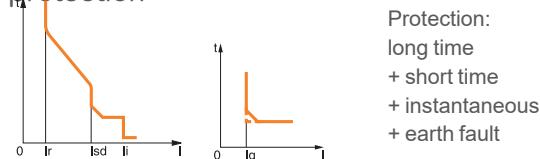

MicroLogic 7.0: selective + earth-leakage protection

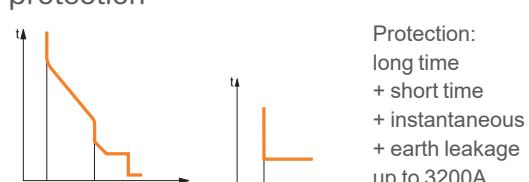

[1] Not compatible with MasterPact MTZ.

Performance levels and trip units

...to MasterPact MTZ2


..... > One identical frame size [2] > 5 performance levels

MasterPact MTZ2

N1, H1, H2, H3, L1 (@ 415 V, for networks <690 V)




MTZ2

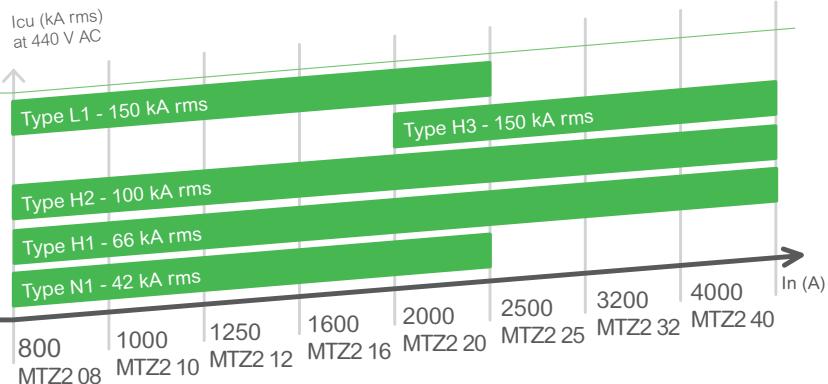

New MicroLogic X range with certified built-in metering and diagnostics functions (incl.wireless)

> MicroLogic X [3][4] Control Units for MasterPact MTZ2 Protection for ...

...MicroLogic 2.0X

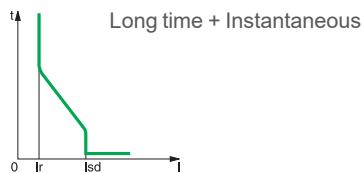

Common characteristics for all MicroLogic X

> Measurement


MicroLogic X performs the measurement of all electrical parameters of an electrical network: Currents, voltages, frequency, power, energy & power factor. Min/Max and average values are elaborated for most of the parameters. Optional digital modules allows the measure of energy per phase and wave form capture.

> Diagnostic


The diagnostics allows to limit the risk of power interruptions and to re-energize the installation as quick as possible after a trip. They provide warnings and messages to help the user in scheduling both preventive and predictive maintenance and device replacement as well.

Note: For futher details on measurement and diagnostic, see Chapter B of MasterPact MTZ catalogue.


Including Wireless technology allowing to Easy read information with EcoStruxure Power Commission

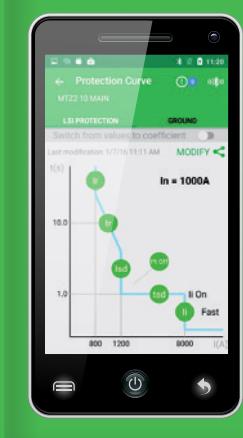

...MicroLogic 6.0X

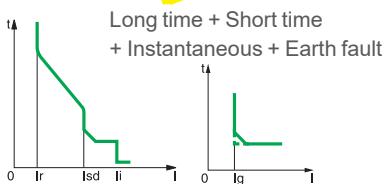

... MicroLogic 7.0X

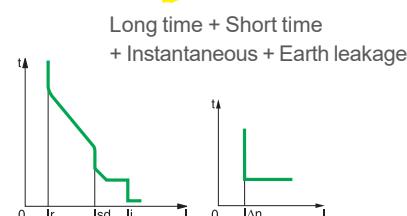

[2] Same physical dimensions to install in most of cubicles (but +3 mm on depth only front cover).

[3] Except demand readings.

[4] Not compatible with MasterPact NT.


Performance levels and trip units

From MasterPact NW40b / NW63...

> One frame size> 2 performance levels>

MasterPact NW 4000/5000/6300


H1, H2 (@ 415 V, for networks < 690 V)

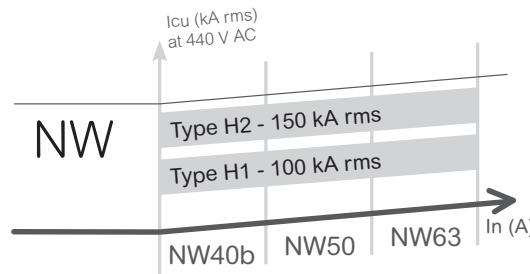

> MicroLogic A/E Control Units for MasterPact NW [1]
Current protection



MicroLogic 2.0: basic protection



> Measurements and programmable protection



A: ammeter

I1, I2, I3, IN, earth-fault, leakage-leakage and maximeter for these measurements fault indications settings in amperes and in seconds.


E: Energy

incorporates all the rms measurements of MicroLogic A, plus voltage, power factor, power and energy metering measurements calculates value "Quickview" function for the automatic cyclical display of the most useful values (as standard or by selection).


MicroLogic 5.0: selective protection



MicroLogic 6.0: selective + earth-fault protection

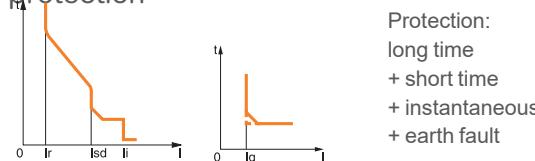

MicroLogic 7.0: selective + earth-leakage protection

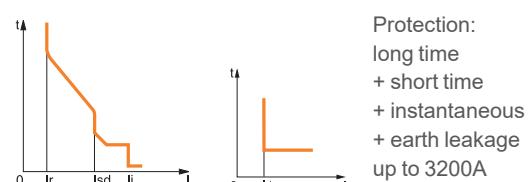

[1] Not compatible with MasterPact MTZ.

Performance levels and trip units

... to MasterPact MTZ3

A


..... > One identical frame size [2] > 2 performance levels

MasterPact MTZ3 4000/5000/6300

H1, H2 (@ 415 V, for networks < 690 V)




New MicroLogic X range with certified built-in metering and diagnostics functions (incl.wireless)

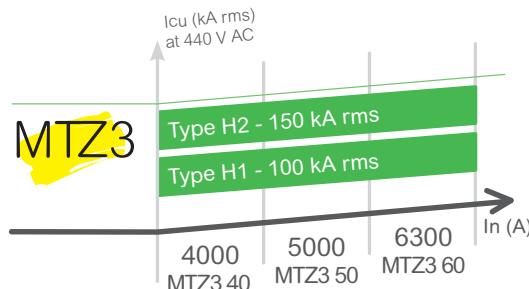

> MicroLogic X [3][4] Control Units for MasterPact MTZ3 Protection for ...

...MicroLogic 2.0X

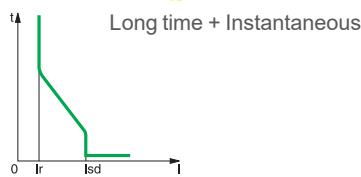

Common characteristics for all MicroLogic X

> Measurement

MicroLogic X performs the measurement of all electrical parameters of an electrical network: Currents, voltages, frequency, power, energy & power factor. Min/Max and average values are elaborated for most of the parameters. Optional digital modules allows the measure of energy per phase and wave form capture.

Including Wireless technology allowing to Easy read information with EcoStruxure Power Commission




...MicroLogic 5.0X




> Diagnostic

The diagnostics allows to limit the risk of power interruptions and to re-energize the installation as quick as possible after a trip. They provide warnings and messages to help the user in scheduling both preventive and predictive maintenance and device replacement as well.

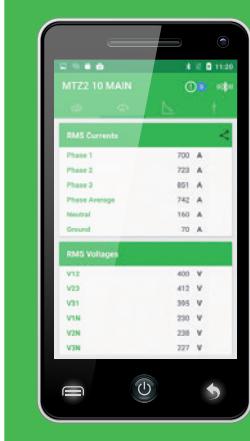


...MicroLogic 6.0X

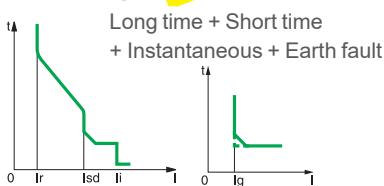

Note: For futher details on measurement and diagnostic, see Chapter B of MasterPact MTZ catalogue.

... MicroLogic 7.0X

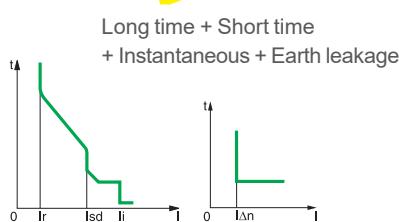


[2] Same physical dimensions to install in most of cubicles (but +3 mm on depth only front cover).

[3] Except demand readings.

[4] Not compatible with MasterPact NT

Dimensions and mounting


DB419788.ai

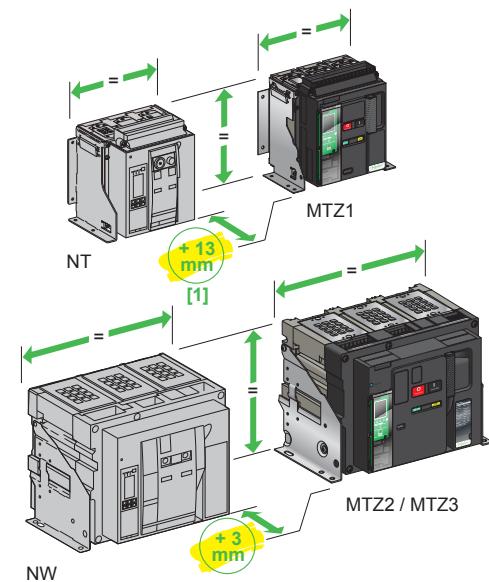

B

MasterPact NT / NW to MTZ1 / MTZ2 / MTZ3

DB419788.ai

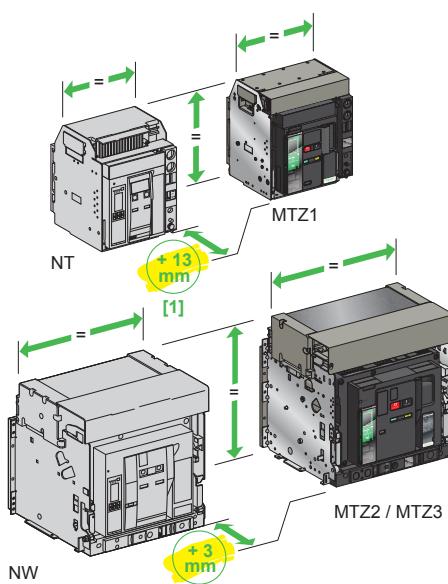

MasterPact NT / NW to MTZ1 / MTZ2 / MTZ3

> For more informations,
please refer on chapter D
"Dimensions".




[1] the size of MasterPact MTZ1 is 13 mm, including spring charging handle deeper than MasterPact NT due to the bigger size of the new front cover. For MasterPact MTZ2/3 the difference is only 3 mm.

Fixed version

Two identical frame sizes using the same mounting system as the MasterPact NT/NW range.

Replacement/extension in an existing switchboard:

- MasterPact NT/NW replaced by a MasterPact MTZ identical in size
- same connection points
- same fixing points.

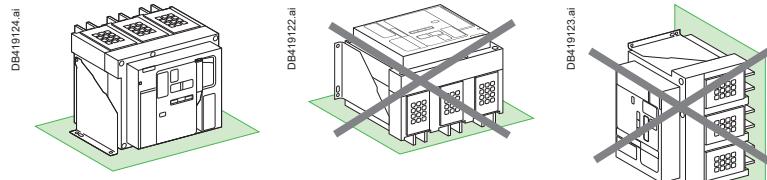


MasterPact NT / NW to MTZ1 / MTZ2 / MTZ3

Drawout version

Two identical frame sizes using the same mounting system as the MasterPact NT/NW range.

Replacement/extension in an existing switchboard:

- MasterPact NT/NW replaced by a MasterPact MTZ identical in size
- same connection points
- same fixing points.

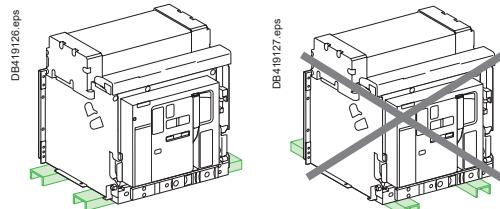


Fixed and drawout version

The size of MasterPact MTZ1 is 13mm deeper than MasterPact NT due to the bigger size of the new front cover.


For MasterPact MTZ2/3 the difference is only 3mm.

Integration of MasterPact MTZ in Prisma, Blokset or Okken cubicles does not require design or parts modifications.

MasterPact MTZ1



MasterPact MTZ2 / MTZ3

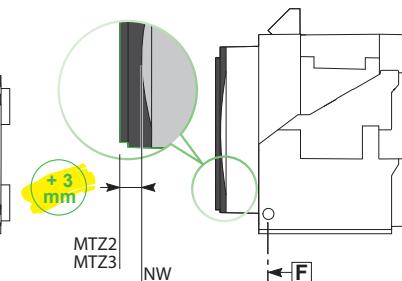

Installation recommendations


Compatibility

Circuit breaker MTZ in chassis NT/NW

B

Compatibility from MasterPact NT/NW to MasterPact MTZ

- MasterPact NT/NW chassis can be used with MasterPact MTZ, **WITH WIRING MODIFICATION ON THE CHASSIS TERMINAL BLOCKS**. Auxiliary circuits wiring on the chassis terminals blocks has to be modified according to MasterPact MTZ drawout instruction sheet (Ref. NVE35470-00) or MasterPact MTZ2/3 and MasterPact MTZ1 user guides (Ref. DOCA0101EN-00) and Instruction sheet (Ref. QGH31931).
- MasterPact MTZ chassis can not be used with MasterPact NT/NW.

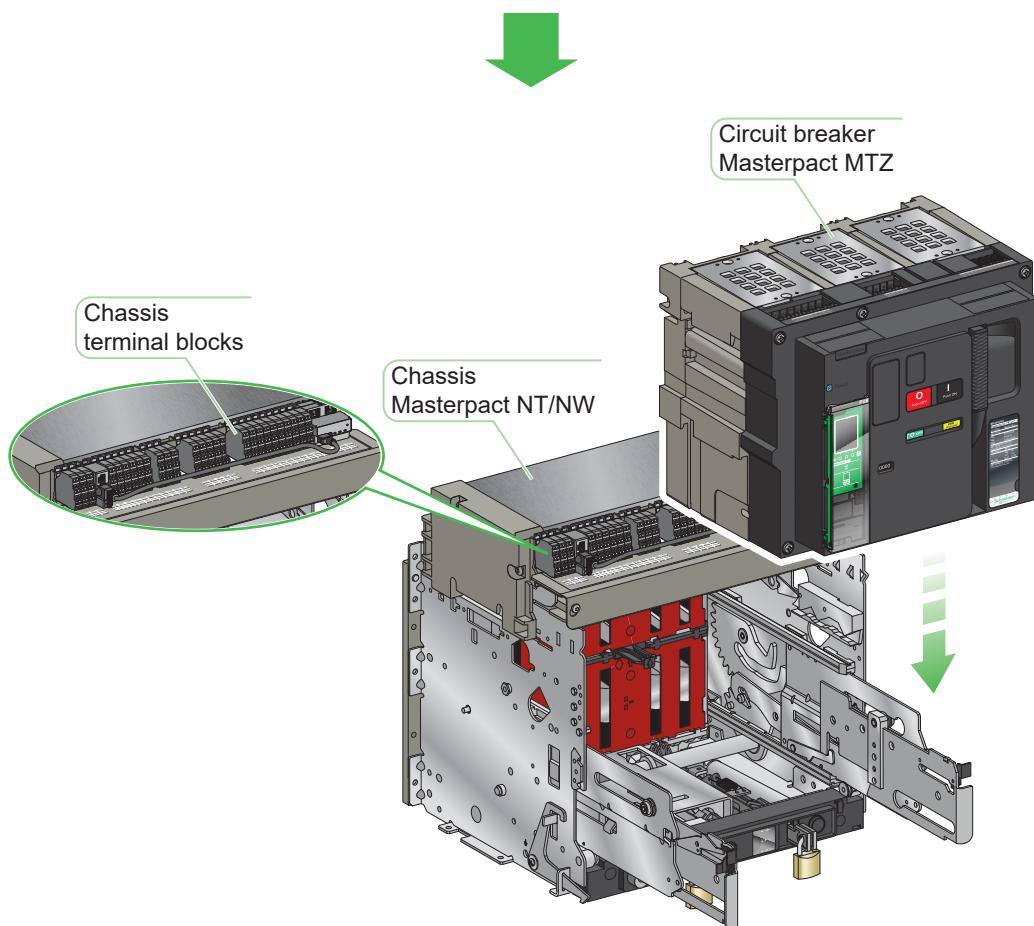

Specific attention of the MasterPact NT/NW chassis condition is required prior to proceed with breaker replacement.

Schneider Electric specialists are available to assess the safe working condition of the chassis with its replacement breaker.

ECOFIT™ MasterPact M to MasterPact MTZ upgrade solutions

C



> MasterPact M>>..... > MasterPact ECOFIT MTZ
Circuit breaker



Schneider Electric has developed tested solution to upgrade obsolete MasterPact M with MasterPact MTZ

MasterPact M ECOFIT™ solution




Plug & Play


A fast and simple upgrade solution.

The ECOFIT™ MasterPact Plug & Play solution lets you retrofit the latest generation of MasterPact MTZ circuit breakers in the existing MasterPact M chassis.

Note: Solution available for withdrawable type only, 3P and 4P, 800 to 3200 A.



Removal



Replacement

Masterkit

The ECOFIT™ Masterkit solution enables to benefit from all the enhanced features of MasterPact MTZ circuit breakers and accessories without modifying the busbars. It requires total shutdown of the installation to access the busbars

Note: Solution available for fixed and drawout types, 3P and 4P, 800 to 6300 A.



Schneider Electric Field Services technicians are available to assist in selecting the most suitable solution.


MasterPact MTZ1

3/4-poles devices


Fixed

IDENTICAL in size to
the equivalent cutout
of MasterPact NT

DB421358.ai

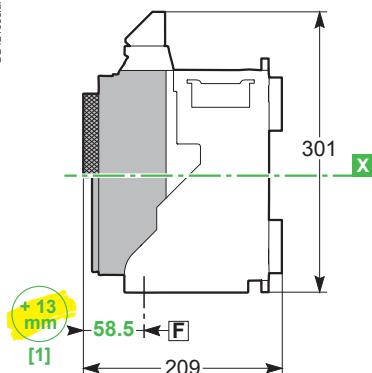

DB421359.ai

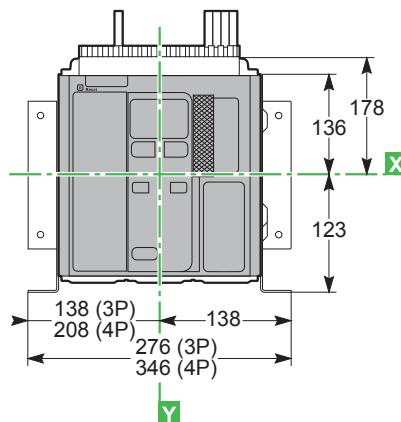


D


Drawout

IDENTICAL in size to
the equivalent cutout
of MasterPact NT

DB421360.ai

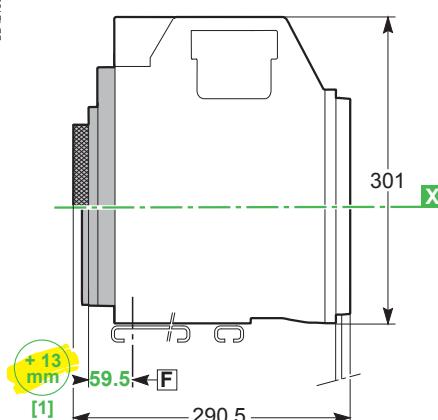

DB421361.ai

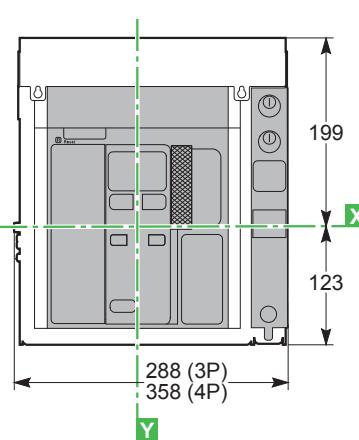

[1] the size of MasterPact MTZ1 is 13 mm, including spring charging handle deeper than MasterPact NT due to the bigger size of the new front cover. For MasterPact MTZ2/3 the difference is only 3 mm.


> For more informations, please refer on catalogue MasterPact MTZ - ref. LVPED216026EN

MasterPact MTZ2

3/4-poles devices


Fixed

DB421362.ai

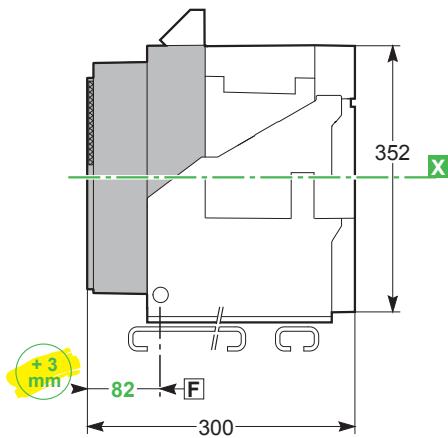

IDENTICAL in size to
the equivalent cutout
of **MasterPact NW**


DB421363.ai

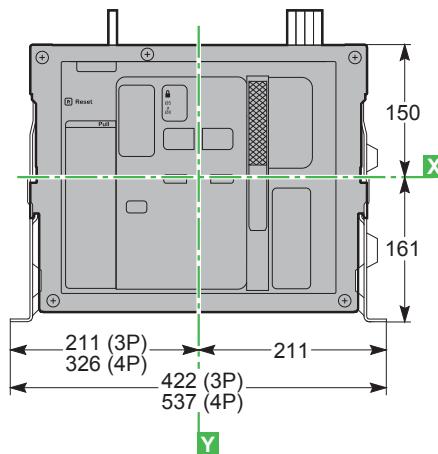

D


Drawout

DB421364.ai

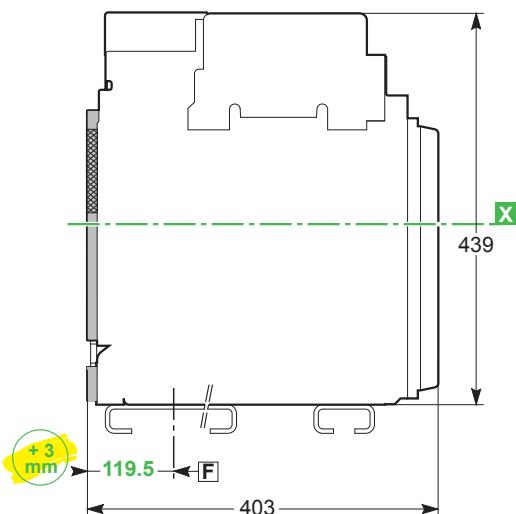

IDENTICAL in size to
the equivalent cutout
of **MasterPact NW**

DB421365.ai

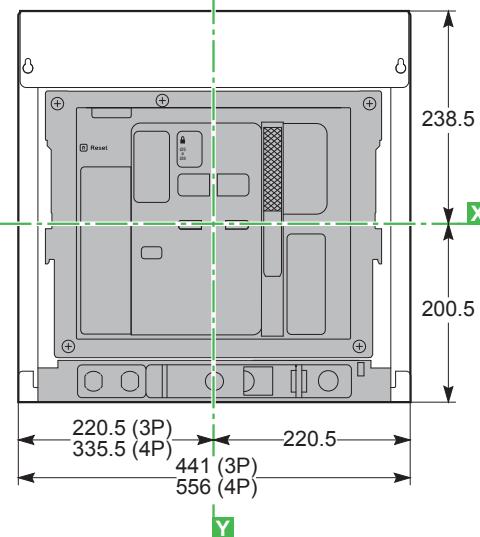


> For more informations, please refer on catalogue MasterPact MTZ - ref. LVPED216026EN

MasterPact MTZ3

3/4-poles devices

Fixed


IDENTICAL in size to
the equivalent cutout
of MasterPact NW

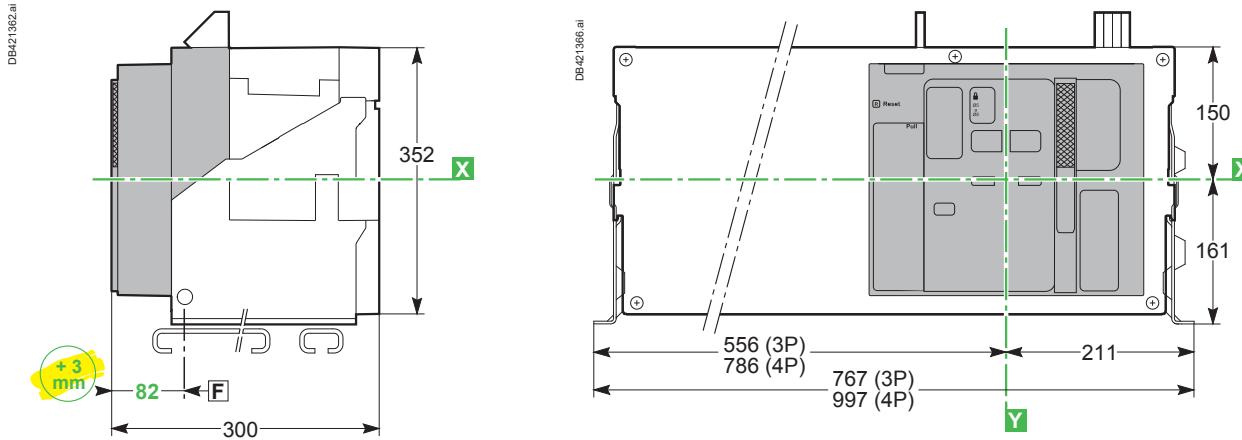

D

Drawout

IDENTICAL in size to
the equivalent cutout
of MasterPact NW

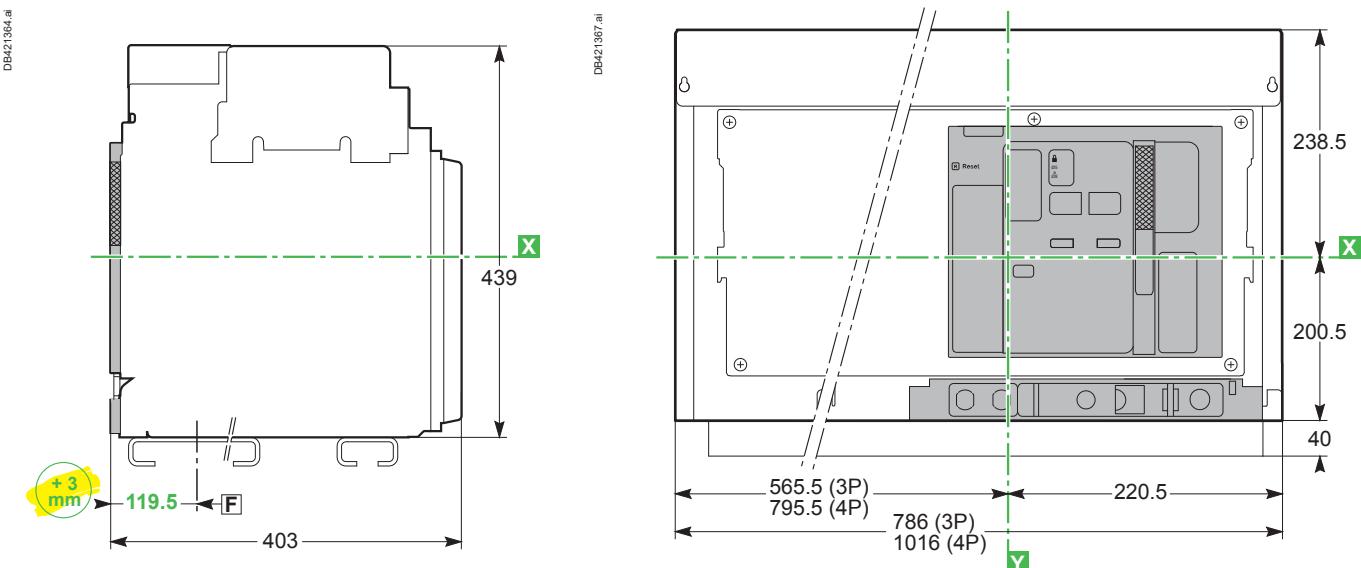

> For more informations, please refer on catalogue MasterPact MTZ - ref. LVPED216026EN

Accessories full compatibility

Between MasterPact NT/NW & MasterPact MTZ



For accurate details please refer to chapter F and G "substitution table".


Complete compatibility between NT/NW parts on MasterPact NT/NW and MasterPact MTZ devices for the following components

- Indication contacts
- MCH (gear motor)
- Circuit breaker keylocks
- Main power connections
- Interlockings


Note:

- non applicable for breaker with comms
- existing compatibility rules to be respected (e.g. accessories for fixed/drawout in correspondence).

DB425314.qps

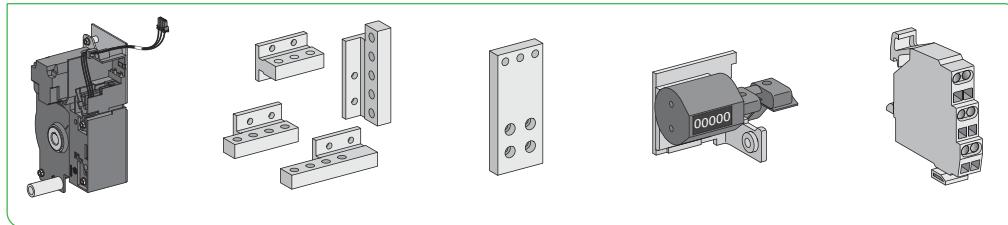

E

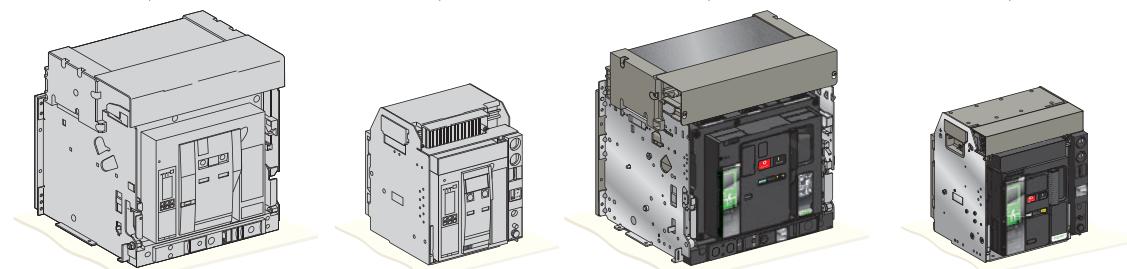


MasterPact NW

MasterPact NT

MasterPact MTZ2/MTZ3

MasterPact MTZ1

Compatibility of External Power Supply

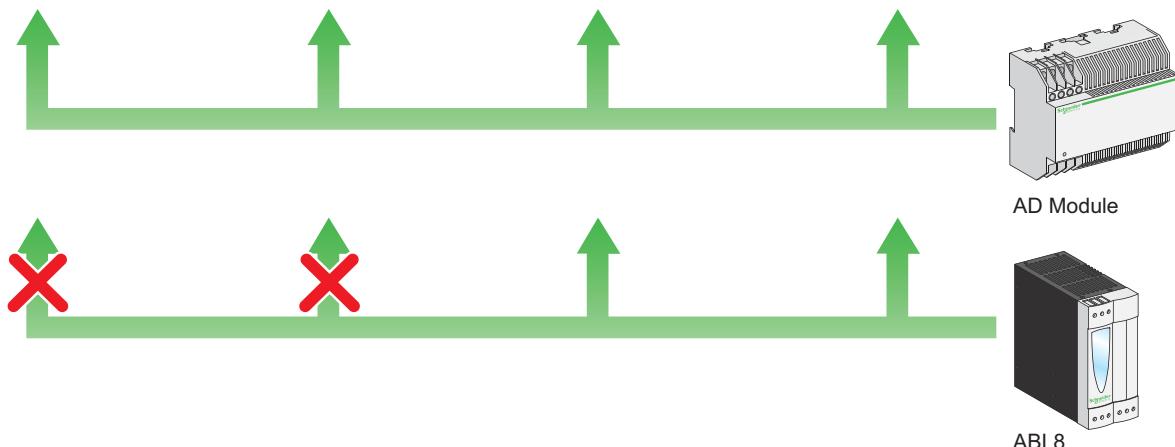

AD Module

ABL8

Accessories conditional compatibility Between MasterPact NT/NW & MasterPact MTZ




For accurate details please refer to chapter F and G "substitution table".

Complete ^[1]^[2] compatibility between NT/NW parts on MasterPact MTZ devices for the following components

- Chassis NT/NW
- ENCT
- Breaker NT/NW
- BPFE
- MDGF

Note: Non applicable for breaker with comms.

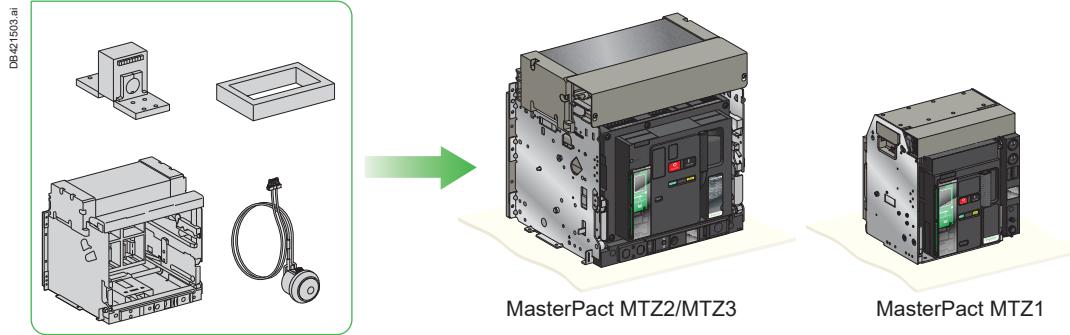


E

Complete ^[2] compatibility between MTZ parts on MasterPact NT/NW devices for the following components

- Chassis locking

Note: Non applicable for breaker with comms.

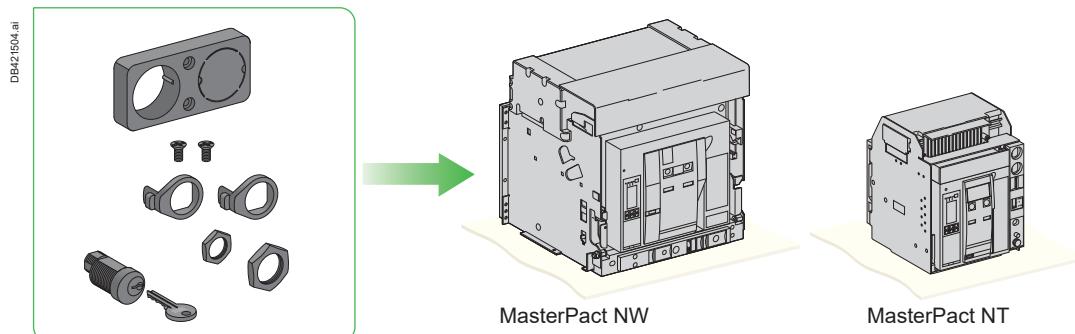

[1] Complete compatibility is possible provided that the corresponding modification on wiring will be implemented as per the instruction notice with all safety recommendations.
[2] Existing compatibility rules to be respected (e.g. accessories for fixed/drawout in correspondancy).

Accessories for MasterPact NT/NW & MasterPact MTZ

Incompatibility




For accurate details please refer to chapter F and G "substitution table".

- MicroLogic X
- Performer & sensor plug
- Communication accessories
- M2C (version MasterPact MTZ)
- Front cover/spring handle
- OFF position locking
- Voltage measurement input (PTE)

Not compatible with MasterPact NT/NW



> MasterPact NW

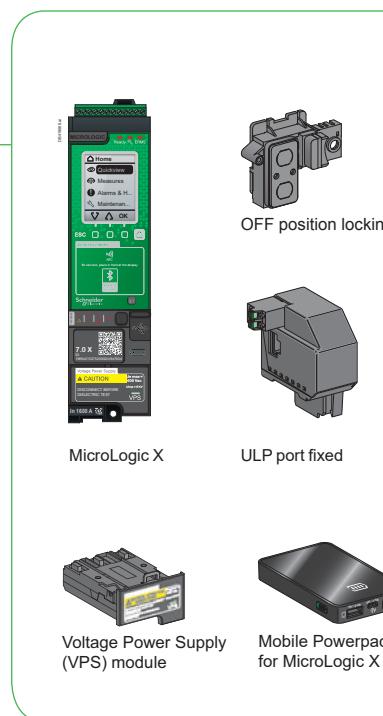

Accessories MTZ


Due to different limitation on the ascendant compatibility, and more in particular due improvements in the product architecture for reliability purposes, **there are accessories from MasterPact MTZ not compatible with MasterPact NT/NW:**

- like MicroLogic X control units,
- MN diag coils, instantaneous voltage releases.

Accessories NT/NW

Due to different innovative features in the new offer (firmware, electrical and front face), **there are few accessories from MasterPact NT/NW not compatible with MasterPact MTZ:**

- like MicroLogic control units
- some communication modules (FDM121)
- RCU/RSU
- standard coils (MX/XF/MN).

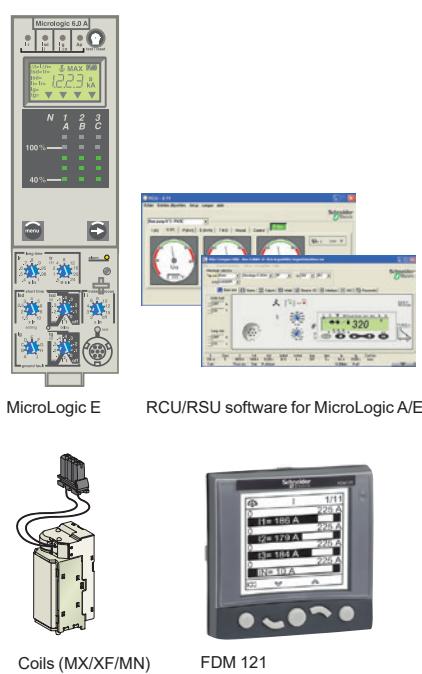

> MasterPact MTZ

MicroLogic control units substitution

Correspondance table between MicroLogic E & MicroLogic X

MicroLogic correspondance table



| Feature | MicroLogic E | | | | MicroLogic X | | | |
|---|--------------|-----|-----|-----|--------------|-----|-----|-----|
| | 2.0 | 5.0 | 6.0 | 7.0 | 2.0 | 5.0 | 6.0 | 7.0 |
| Protection LSO (IEC) | ● | | | | ● | | | |
| Protection LSI | | ● | | | ● | | | |
| Protection LSIG (Earth fault) | | | ● | | | | ● | |
| Protection LSIV (Earth Leakage) | | | | | | | | ● |
| ZSI (Zone Selective Interlocking) | ● | ● | ● | ● | ● | ● | ● | ● |
| Dual Settings | | | | | ● | ● | ● | ● |
| Power Meter (Energy CL 2 (IEC)) | ● | ● | ● | ● | ● | ● | ● | ● |
| Power Meter (Energy CL 1 (IEC)) [1] | | | | | ● | ● | ● | ● |
| Health & Trip Fault Indications (LEDs) including READY LED | | | | | ● | ● | ● | ● |
| M2C | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Breaker Comm Module (BCM/ULP) | ○ | ○ | ○ | ○ | ● | ● | ● | ● |
| Embedded display spare part | | | | | ● | ● | ● | ● |
| Internal VPS module (up to 600 V AC) | | | | | ○ | ○ | ○ | ○ |
| Wireless Powerless (NFC) | | | | | ● | ● | ● | ● |
| Wireless (Bluetooth Low Energy) | | | | | ● | ● | ● | ● |
| USB connection | | | | | ● | ● | ● | ● |
| Circuit Breaker Health Status | | | | | ● | ● | ● | ● |
| ID cards (BOM) | | | | | ● | ● | ● | ● |
| Alarms | ● | ● | ● | ● | ● | ● | ● | ● |
| Internal Monitored Functions (Coils, Control Unit, Control Gear, Tripping chain...) | | | | | ● | ● | ● | ● |
| Digital modules | | | | | | | | |
| Undervoltage and overvoltage | | | | | ○ | ○ | ○ | ○ |
| Underfrequency and overfrequency | | | | | ○ | ○ | ○ | ○ |
| Reverse active power | | | | | ○ | ○ | ○ | ○ |
| Ground-fault alarm | | | | | ○ | ○ | ○ | ○ |
| Energy Reduction Maintenance Settings | | | | | ○ | ○ | ○ | ○ |
| Energy per phase | | | | | ○ | ○ | ○ | ○ |
| Individual harmonics analysis | | | | | ○ | ○ | ○ | ○ |
| Power restoration assistant | | | | | ○ | ○ | ○ | ○ |
| MasterPact operation assistant | | | | | ○ | ○ | ○ | ○ |
| Waveform capture on trip event | | | | | ○ | ○ | ○ | ○ |
| Modbus legacy dataset | | | | | ○ | ○ | ○ | ○ |

● : Yes, ○ : optional.

[1] Except demand readings available in 2017

E

E

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|--------------------|--------------------|
| 33170 | 1 CARRIAGE SWITCH (CONNECTED/DISCONNECTED/TEST) | LV833170SP | CE/CD/CT position contact - 8 A/240 VAC - for MTZ1 - drawout spare part | Yes | Yes |
| 33171 | 1 LOW-LEVEL CARRIAGE SWICH (CONNECTED/DISCONNECTED/TEST) | LV833171SP | CE/CD/CT position contact - low level - for MTZ1 - drawout spare part | Yes | Yes |
| 33200 | CABLE-TYPE INTERLOCKING PLATE FOR FIXED BREAKER | LV833200SP | Cable interlocking adaptation fixture - for MTZ1 - fixed spare part | Yes | Yes |
| 33201 | CABLE-TYPE INTERLOCKING PLATE FOR D/O BREAKER | LV833201SP | Cable interlocking adaptation fixture - for MTZ1 - drawout spare part | Yes | Yes |
| 33203 | 2 ROD-TYPE INTERLOCKING PLATES FOR FIXED BREAKERS | LV833203SP | Rod interlocking adaptation fixture - for MTZ1 - fixed | Yes | Yes |
| 33204 | 2 ROD-TYPE INTERLOCKING PLATES FOR D/O BREAKERS | LV833204SP | Rod interlocking adaptation fixture - for MTZ1 - drawout | Yes | Yes |
| 33209 | 1 SET OF 2 INTERLOCK CABLES | LV833209SP | 2 Cables for interlocking any combination - for MTZ1/MTZ2/MTZ3 - spare part | Yes | Yes |
| 33210 | 1 SET OF 2 INTERLOCK RODS | LV833210SP | 2 rods for interlocking - spare part | Yes | Yes |
| 33573 | window sensor for residual current protection 280 x 115 mm | LV833573SP | Rectangular sensor for earth-leakage protection - 280 x 115 mm spare part | Yes | Yes |
| 33574 | window sensor for residual current protection 470 x 160 mm | LV833574SP | Rectangular sensor for earth-leakage protection - 470 x 160 mm spare part | Yes | Yes |
| 33576 | CT neutral or ground fault protection for NT 06 to 16, NS 630b to 1600 | LV833576SP | CT neutral or ground fault protection - 400/1600A - for MTZ1 spare part | Yes ^[1] | No |
| 33579 | CT source ground return protection for NS, NT, NW | LV833579SP | CT source ground return protection - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 33604 | rear connection upside vertical mounting for NS 630b to 1600 3P | LV833604 | Rear top connection, vertical - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 33605 | rear connection downside vertical mounting for NS 630b to 1600 3P | LV833605 | Rear bottom connection, vertical - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 33606 | rear connection upside horizontal mounting for NS 630b to 1600 3P | LV833606 | Rear top connection, horizontal - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 33607 | rear connection downside horizontal mounting for NS 630b to 1600 3P | LV833607 | Rear bottom connection, horizontal - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 33614 | rear connection upside vertical mounting for NS 630b to 1600 4P | LV833614 | Rear top connection, vertical - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 33615 | rear connection downside vertical mounting for NS 630b to 1600 4P | LV833615 | Rear bottom connection, vertical - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 33616 | rear connection upside horizontal mounting for NS 630b to 1600 4P | LV833616 | Rear top connection, horizontal - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 33617 | rear connection downside horizontal mounting for NS 630b to 1600 4P | LV833617 | Rear bottom connection, horizontal - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 33622 | 95 mm pitch spreader set flat connection for NT 06 to 16 3P spare part | LV833622SP | 95 mm pitch spreader set flat connection - for MTZ1 - 3P - spare part | Yes | Yes |
| 33623 | 95 mm pitch spreader set flat connection for NT 06 to 16 4P spare part | LV833623SP | 95 mm pitch spreader set flat connection - for MTZ1 - 4P - spare part | Yes | Yes |
| 33642 | KIT 3P VERTICAL CONNECTION ADAPTERS | LV833642SP | 3P vertical connection adapters - spare part | Yes | Yes |
| 33643 | KIT 4P VERTICAL CONNECTION ADAPTERS | LV833643SP | 4P vertical connection adapters - spare part | Yes | Yes |
| 33644 | 3P CABLE LUG ADAPTER KIT | LV833644SP | Cable lug adapters - set of 3 - for MasterPact MTZ1 - 3P Spare part | Yes | Yes |
| 33645 | 4P CABLE LUG ADAPTER KIT | LV833645SP | Cable lug adapters - set of 4 - for MasterPact MTZ1 - 4P spare part | Yes | Yes |
| 33648 | 3 INTERPHASE BARRIERS FOR FRONT CONNECTIONS | LV833648SP | 3 interph barriers - for MTZ1/NS630b..1600 rear con - 3P/4P fixed - spare part | Yes | Yes |
| 33680 | ADJUSTABLE DELAY UNIT FOR MN 048/060 VAC/VDC | LV833680SP | Adjustable delay unit - for MN undervoltage release - 48/60 VAC/DC spare part | Yes | Yes |
| 33681 | ADJUSTABLE DELAY UNIT FOR MN 100/130 VAC/VDC | LV833681SP | Adjustable delay unit - for MN undervoltage release - 100/130 V AC/DC spare part | Yes | Yes |
| 33682 | ADJUSTABLE DELAY UNIT FOR MN 200/250 VAC/VDC | LV833682SP | Adjustable delay unit - for MN undervoltage release - 200/250 V AC/DC spare part | Yes | Yes |
| 33683 | ADJUSTABLE DELAY UNIT FOR MN 380/480 VAC | LV833683SP | Adjustable delay unit - for MN undervoltage release - 380/480 VAC spare part | Yes | Yes |
| 33684 | NON-ADJUSTABLE DELAY UNIT FOR MN 100/130 VAC/VDC | LV833684SP | Non-adjust delay unit - for MN undervoltage release - 100/130 V AC/DC spare part | Yes | Yes |
| 33685 | NON-ADJUSTABLE DELAY UNIT FOR MN 200/250 VAC/VDC | LV833685SP | Non-adjust delay unit - for MN undervoltage release - 200/250 V AC/DC spare part | Yes | Yes |
| 33718 | ESCUTCHEON FOR FIXED ELEC. OP. BREAKER | LV833718SP | Escutcheon - for fixed electrical operated MTZ1 breaker | Yes | Yes |
| 33722 | CHASSIS WITHOUT CONNECTIONS 630/1250A 3P | LV833722 | Chassis for MasterPact MTZ1 06-12 H1/H2 - 1250 A - 3P | Yes ^[2] | Yes ^[2] |
| 33723 | CHASSIS WITHOUT CONNECTIONS 1600A 3P | LV833723 | Chassis for MasterPact MTZ1 16 H1/H2 - 1600 A - 3P | Yes ^[2] | Yes ^[2] |
| 33725 | CHASSIS WITHOUT CONNECTIONS 630/1250A 4P | LV833725 | Chassis for MasterPact MTZ1 06-12 H1/H2 - 1250 A - 4P | Yes ^[2] | Yes ^[2] |
| 33726 | CHASSIS WITHOUT CONNECTIONS 1600A 4P | LV833726 | Chassis for MasterPact MTZ1 16 H1/H2 - 1600 A - 4P | Yes ^[2] | Yes ^[2] |
| 33727 | front connection upside mounting for NS 630b to 1600 cradle 3P | LV833727 | Front top connection - for MTZ1 06-16 - 3P drawout | Yes | Yes |
| 33728 | front connection downside mounting for NS 630b to 1600 cradle 3P | LV833728 | Front bottom connection - for MTZ1 06-16 - 3P drawout | Yes | Yes |
| 33729 | rear connection upside vertical mounting for NS 630b to 1600 cradle 3P | LV833729 | Rear top connection, vertical - for MTZ1 06-16 - 3P drawout | Yes | Yes |
| 33730 | rear connection downside vertical mounting for NS 630b to 1600 cradle 3P | LV833730 | Rear bottom connection, vertical - for MTZ1 06-16 - 3P drawout | Yes | Yes |
| 33731 | rear connection upside horizontal mounting for NS 630b to 1600 cradle 3P | LV833731 | Rear top connection, horizontal - for MTZ1 06-16 - 3P | Yes | Yes |

^[1] Need to disassemble the chassis to 630 or 1600 and then to 3P level. ^[2] MasterPact NT and MasterPact MTZ chassis are interchangeable but the CE, CD and CT are not at the same place, the wiring of the MicroLogic is not the same and UC3 and SDE2/RES terminal blocks positions are switched between. Use the Retrofit kit for NT chassis to MTZ1 - LV850066SP - for making compatible a NT chassis with a MTZ1 device.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|----------------|
| 33732 | rear connection downside horizontal mounting for NS 630b to 1600 cradle 3P | LV833732 | Rear bottom connection, horizontal - for MTZ1 06-16 - 3P drawout | Yes | Yes |
| 33733 | front connection upside mounting for NS 630b to 1600 cradle 4P | LV833733 | Front top connection - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33734 | front connection downside mounting for NS 630b to 1600 cradle 4P | LV833734 | Front bottom connection - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33735 | rear connection upside vertical mounting for NS 630b to 1600 cradle 4P | LV833735 | Rear top connection, vertical - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33736 | rear connection downside vertical mounting for NS 630b to 1600 cradle 4P | LV833736 | Rear bottom connection, vertical - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33737 | rear connection upside horizontal mounting for NS 630b to 1600 cradle 4P | LV833737 | Rear top connection, horizontal - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33738 | rear connection downside horizontal mounting for NS 630b to 1600 cradle 4P | LV833738 | Rear bottom connection, horizontal - for MTZ1 06-16 - 4P drawout | Yes | Yes |
| 33751 | CONNECTED POSITION CONTACT | LV833751 | CONNECTED POSITION CONTACT | Yes | Yes |
| 33752 | TEST POSITION CONTACT | LV833752 | TEST POSITION CONTACT | Yes | Yes |
| 33753 | DISCONNECTED POSITION CONTACT | LV833753 | DISCONNECTED POSITION CONTACT | Yes | Yes |
| 33754 | LOW-LEVEL CONNECTED POSITION CONTACT | LV833754 | LOW-LEVEL CONNECTED POSITION CONTACT | Yes | Yes |
| 33755 | LOW-LEVEL TEST POSITION CONTACT | LV833755 | LOW-LEVEL TEST POSITION CONTACT | Yes | Yes |
| 33756 | LOW-LEVEL DISCONNECTED POSITION CONTACT | LV833756 | LOW-LEVEL DISCONNECTED POSITION CONTACT | Yes | Yes |
| 33763 | AUXILIARY TERMINAL SHIELD 3P | LV833763 | Auxiliary terminal shield - for MasterPact MTZ1 - 3P spare part | Yes | Yes |
| 33764 | AUXILIARY TERMINAL SHIELD 4P | LV833764 | Auxiliary terminal shield - for MasterPact MTZ1 - 4P spare part | Yes | Yes |
| 33767 | BREAKER MISMATCH PROTECTION | LV833767SP | VDC breaker mismatch protection - spare part | Yes | Yes |
| 33768 | INTERPHASE BARRIER FOR CHASSIS | LV833768SP | 3 interph barriers - for MTZ1/NS630b..1600 rear con - 3P/4P drawout - spare part | Yes | Yes |
| 33769 | PROFALUX DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833769SP | Chassis locking - Profalux / Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33770 | RONIS DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833769SP | Chassis locking - Profalux / Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33771 | CASTELL DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833771SP | Chassis locking - Castell adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33772 | KIRK DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833772SP | Chassis locking - Kirk adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33773 | PROFALUX DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV833773 | Chassis locking - 1 Profalux keylock 2 keys | Yes | Yes |
| 33774 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV833774 | Chassis locking - 2 Profalux locks 1 key | Yes | Yes |
| 33775 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV833775 | Chassis locking - 2 Profalux locks 2 diff keys | Yes | Yes |
| 33776 | RONIS DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV833776 | Chassis locking - 1 Ronis keylock 2 keys | Yes | Yes |
| 33777 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV833777 | Chassis locking - 2 Ronis locks 1 key | Yes | Yes |
| 33778 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV833778 | Chassis locking - 2 Ronis locks 2 diff keys | Yes | Yes |
| 33779 | OPTIONAL DISCONNECT-TEST-CONNECT LOCKING | LV833779 | OPTIONAL DISCONNECT-TEST-CONNECT LOCKING | Yes | Yes |
| 33786 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) | LV833786 | Door interlock right-hand side VPEC - for MTZ1 - drawout | Yes | Yes |
| 33787 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) | LV833787 | Door interlock left-hand side VPEC - for MTZ1 - drawout | Yes | Yes |
| 33788 | RACKING INTERLOCK (LOCKOUT WITH DOOR OPEN) | LV833788 | Racking interlock VPOC (crank & open door) - for MTZ1 - drawout | Yes | Yes |
| 33792 | voltage release MX com 24 V DC and AC 50 and 60Hz | LV833792 | MX com opening voltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | No | No |
| 33793 | voltage release MX com 48 V DC and AC 50 and 60Hz | LV833793 | MX com opening voltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | No | No |
| 33794 | voltage release MX com 100 to 130 V DC and AC 50 and 60 Hz | LV833794 | MX communicating opening voltage release - 100/130 V AC/DC - for drawout MTZ1 | No | No |
| 33795 | voltage release MX com 200 to 250 V DC and AC 50 and 60 Hz | LV833795 | MX communicating opening voltage release - 200/250 V AC/DC - for drawout MTZ1 | No | No |
| 33796 | voltage release MX com 277 V AC 50 and 60Hz | LV833796 | MX communicating opening voltage release - 277 V AC - for drawout MTZ1 | No | No |
| 33797 | voltage release MX com 380 to 480 V AC 50 and 60Hz | LV833797 | MX communicating opening voltage release - 380/480 V AC - for drawout MTZ1 | No | No |
| 33806 | auxiliary contact 1 OC low level | LV833806 | ON/OFF indication contact 1 OF - low level - for MTZ1 - drawout | Yes | Yes |
| 33810 | voltage release MX 24 V DC and AC 50 and 60Hz | LV833810 | MX opening voltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | Yes | Yes |
| 33811 | voltage release MX 48 V DC and AC 50 and 60Hz | LV833811 | MX opening voltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | Yes | Yes |
| 33812 | voltage release MX 100 to 130 V DC and AC 50 and 60 Hz | LV833812 | MX opening voltage release - 100/130 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 33813 | voltage release MX 200 to 250 V DC and AC 50 and 60 Hz | LV833813 | MX opening voltage release - 200/250 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 33814 | voltage release MX 277 VAC 50 and 60Hz | LV833814 | MX opening voltage release - 277 V AC - for drawout MTZ1 | Yes | Yes |
| 33815 | voltage release MX 380 to 480 VAC 50 and 60Hz | LV833815 | MX opening voltage release - 380/480 V AC - for drawout MTZ1 | Yes | Yes |

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|---|----------------|----------------|
| 33819 | instantaneous undervoltage release MN 24 V DC and AC 50 and 60Hz | LV833819 | MN undervoltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | Yes | Yes |
| 33820 | instantaneous undervoltage release MN 48 V DC and AC 50 and 60Hz | LV833820 | MN undervoltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | Yes | Yes |
| 33821 | instantaneous undervoltage release MN 100 to 130 V DC and AC 50 and 60 Hz | LV833821 | MN undervoltage release - 100/130 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 33822 | instantaneous undervoltage release MN 200 to 250 V DC and AC 50 and 60 Hz | LV833822 | MN undervoltage release - 200/250 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 33824 | instantaneous undervoltage release MN 380 to 480 V AC 50 and 60Hz | LV833824 | MN undervoltage release - 380/480 V AC - for drawout MTZ1 | Yes | Yes |
| 33857 | ESCUTCHEON FOR MANUAL OR ELEC. OP. DRAWOUT BREAKER | LV833857SP | Door escutcheon for fixed mounting - for MasterPact MTZ1 spare part | Yes | Yes |
| 33858 | ESCUTCHEON BLANKING PLATE FOR MANUAL OR ELEC. OP. BREAKER | LV833858SP | Door escutcheon blanking plate - for MasterPact MTZ1 spare part | Yes | Yes |
| 33859 | TRANSPARENT COVER FOR ESCUTCHEON ON DRAWOUT BREAKER | LV833859SP | IP54 transparent cover - for MasterPact MTZ1 spare part | Yes | Yes |
| 33895 | OPERATION COUNTER MECHANICAL 5 DIGIT DISPLAY FOR NT 06 TO 16 | LV833895 | CDM operation counter - mechanical 5 digit display - for MTZ1 | Yes | Yes |
| 33897 | PUSHBUTTON PADLOCKING DEVICE | LV833897 | Pushbutton locking cover - for MasterPact MTZ1 | No | No |
| 33912 | rod interlocking for fixed MasterPact NT06 to 16 | LV833203SP + LV833210SP | Rod interlocking adaptation fixture - for MTZ1 - fixed + 2 rods for interlocking for MTZ/NT/NW - spare part | Yes | Yes |
| 33913 | rod interlocking for drawout ComPact NS630b to 1600 | LV833204SP + LV833210SP | Rod interlocking adaptation fixture - for MTZ1 - drawout + 2 rods for interlocking for MTZ/NT/NW - spare part | Yes | Yes |
| 34035 | CT neutral or ground fault protection for NW 08 to 20 | LV834035SP | CT neutral or ground fault protection - 400/2000A - for MTZ2 spare part | Yes [1] | No |
| 34036 | CT neutral or ground fault protection 1000/4000A FOR MasterPact NW | LV834036SP | CT neutral or ground fault protection - 1000/4000A - for MTZ2/MTZ3 spare part | Yes [1] | No |
| 47071 | CHASSIS 3WIRE AUX TERMIN. NT X30 | LV847071SP | 3 wires terminal block - 30 parts - for MasterPact MTZ1 - drawout SPARE PART | Yes | Yes |
| 47072 | CHASSIS 6WIRE AUX TERMIN. NT X10 | LV847072SP | 6 wires terminal block - 10 parts - for MasterPact MTZ1 - drawout SPARE PART | Yes | Yes |
| 47110 | basic frame MasterPact NT06H1 630 A 3P fixed | LV847110 | Circuit breaker MasterPact MTZ1 06H1 - 630 A - 3P fixed - w/o MicroLogic | No | No |
| 47112 | basic frame MasterPact NT06L1 630 A 3P fixed | LV847112 | Circuit breaker MasterPact MTZ1 06L1 - 630 A - 3P fixed - w/o MicroLogic | No | No |
| 47113 | basic frame MasterPact NT06H2 630 A 3P fixed | LV847113 | Circuit breaker MasterPact MTZ1 06H2 - 630 A - 3P fixed - w/o MicroLogic | No | No |
| 47115 | basic frame MasterPact NT06H1 630 A 4P fixed | LV847115 | Circuit breaker MasterPact MTZ1 06H1 - 630 A - 4P fixed - w/o MicroLogic | No | No |
| 47117 | basic frame MasterPact NT06L1 630 A 4P fixed | LV847117 | Circuit breaker MasterPact MTZ1 06L1 - 630 A - 4P fixed - w/o MicroLogic | No | No |
| 47119 | basic frame MasterPact NT06H2 630 A 4P fixed | LV847119 | Circuit breaker MasterPact MTZ1 06H2 - 630 A - 4P fixed - w/o MicroLogic | No | No |
| 47120 | basic frame MasterPact NT08H1 800 A 3P fixed | LV847120 | Circuit breaker MasterPact MTZ1 08H1 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 47122 | basic frame MasterPact NT08L1 800 A 3P fixed | LV847122 | Circuit breaker MasterPact MTZ1 08L1 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 47123 | basic frame MasterPact NT08H2 800 A 3P fixed | LV847123 | Circuit breaker MasterPact MTZ1 08H2 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 47125 | basic frame MasterPact NT08H1 800 A 4P fixed | LV847125 | Circuit breaker MasterPact MTZ1 08H1 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 47127 | basic frame MasterPact NT08L1 800 A 4P fixed | LV847127 | Circuit breaker MasterPact MTZ1 08L1 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 47128 | basic frame MasterPact NT08H2 800 A 4P fixed | LV847128 | Circuit breaker MasterPact MTZ1 08H2 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 47130 | basic frame MasterPact NT10H1 1000 A 3P fixed | LV847130 | Circuit breaker MasterPact MTZ1 10H1 - 1000 A - 3P fixed - w/o MicroLogic | No | No |
| 47131 | basic frame MasterPact NT10H2 1000 A 3P fixed | LV847131 | Circuit breaker MasterPact MTZ1 10H2 - 1000 A - 3P fixed - w/o MicroLogic | No | No |
| 47132 | basic frame MasterPact NT10L1 1000 A 3P fixed | LV847132 | Circuit breaker MasterPact MTZ1 10L1 - 1000 A - 3P fixed - w/o MicroLogic | No | No |
| 47135 | basic frame MasterPact NT10H1 1000 A 4P fixed | LV847135 | Circuit breaker MasterPact MTZ1 10H1 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 47137 | basic frame MasterPact NT10L1 1000 A 4P fixed | LV847137 | Circuit breaker MasterPact MTZ1 10L1 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 47138 | basic frame MasterPact NT10H2 1000 A 4P fixed | LV847138 | Circuit breaker MasterPact MTZ1 10H2 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 47140 | basic frame MasterPact NT12H1 1250 A 3P fixed | LV847140 | Circuit breaker MasterPact MTZ1 12H1 - 1250 A - 3P fixed - w/o MicroLogic | No | No |
| 47141 | basic frame MasterPact NT12H2 1250 A 3P fixed | LV847141 | Circuit breaker MasterPact MTZ1 12H2 - 1250 A - 3P fixed - w/o MicroLogic | No | No |
| 47145 | basic frame MasterPact NT12H1 1250 A 4P fixed | LV847145 | Circuit breaker MasterPact MTZ1 12H1 - 1250 A - 4P fixed - w/o MicroLogic | No | No |
| 47147 | basic frame MasterPact NT12H2 1250 A 4P fixed | LV847147 | Circuit breaker MasterPact MTZ1 12H2 - 1250 A - 4P fixed - w/o MicroLogic | No | No |
| 47150 | basic frame MasterPact NT16H1 1600 A 3P fixed | LV847150 | Circuit breaker MasterPact MTZ1 16H1 - 1600 A - 3P fixed - w/o MicroLogic | No | No |
| 47151 | basic frame MasterPact NT16H2 1600 A 3P fixed | LV847151 | Circuit breaker MasterPact MTZ1 16H2 - 1600 A - 3P fixed - w/o MicroLogic | No | No |
| 47155 | basic frame MasterPact NT16H1 1600 A 4P fixed | LV847155 | Circuit breaker MasterPact MTZ1 16H1 - 1600 A - 4P fixed - w/o MicroLogic | No | No |

[1] Need to disconnect the shield at ENCT level.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|--|----------------|--------------------|
| 47157 | basic frame MasterPact NT16H2 1600 A 4P fixed | LV847157 | Circuit breaker MasterPact MTZ1 16H2 - 1600 A - 4P fixed - w/o MicroLogic | No | No |
| 47159 | switch disconnector MasterPact NT06HA 3P 630 A 690 V fixed | LV847159 | Switch-disconnector MasterPact MTZ1 06 HA - 630 A - 3P fixed | Yes | Yes ^[1] |
| 47160 | switch disconnector MasterPact NT06HA 4P 630 A 690 V fixed | LV847160 | Switch-disconnector MasterPact MTZ1 06 HA - 630 A - 4P fixed | Yes | Yes ^[1] |
| 47161 | switch disconnector MasterPact NT08HA 3P 800 A 690 V fixed | LV847161 | Switch-disconnector MasterPact MTZ1 08 HA - 800 A - 3P fixed | Yes | Yes ^[1] |
| 47162 | switch disconnector MasterPact NT08HA 4P 800 A 690 V fixed | LV847162 | Switch-disconnector MasterPact MTZ1 08 HA - 800 A - 4P fixed | Yes | Yes ^[1] |
| 47163 | switch disconnector MasterPact NT10HA 3P 1000 A 690 V fixed | LV847163 | Switch-disconnector MasterPact MTZ1 10 HA - 1000 A - 3P fixed | Yes | Yes ^[1] |
| 47164 | switch disconnector MasterPact NT10HA 4P 1000 A 690 V fixed | LV847164 | Switch-disconnector MasterPact MTZ1 10 HA - 1000 A - 4P fixed | Yes | Yes ^[1] |
| 47165 | switch disconnector MasterPact NT12HA 3P 1250 A 690 V fixed | LV847165 | Switch-disconnector MasterPact MTZ1 12 HA - 1250 A - 3P fixed | Yes | Yes ^[1] |
| 47166 | switch disconnector MasterPact NT12HA 4P 1250 A 690 V fixed | LV847166 | Switch-disconnector MasterPact MTZ1 12 HA - 1250 A - 4P fixed | Yes | Yes ^[1] |
| 47167 | switch disconnector MasterPact NT16HA 3P 1600 A 690 V fixed | LV847167 | Switch-disconnector MasterPact MTZ1 16 HA - 1600 A - 3P fixed | Yes | Yes ^[1] |
| 47168 | switch disconnector MasterPact NT16HA 4P 1600 A 690 V fixed | LV847168 | Switch-disconnector MasterPact MTZ1 16 HA - 1600 A - 4P fixed | Yes | Yes ^[1] |
| 47200 | basic frame MasterPact NT06H1 630 A 3P draw out | LV847200 | Circuit breaker MasterPact MTZ1 06H1 - 630 A - 3P drawout - w/o MicroLogic | No | No |
| 47202 | basic frame MasterPact NT06L1 630 A 3P draw out | LV847202 | Circuit breaker MasterPact MTZ1 06L1 - 630 A - 3P drawout - w/o MicroLogic | No | No |
| 47203 | basic frame MasterPact NT06H2 630 A 3P draw out | LV847203 | Circuit breaker MasterPact MTZ1 06H2 - 630 A - 3P drawout - w/o MicroLogic | No | No |
| 47205 | basic frame MasterPact NT06H1 630 A 4P draw out | LV847205 | Circuit breaker MasterPact MTZ1 06H1 - 630 A - 4P drawout - w/o MicroLogic | No | No |
| 47207 | basic frame MasterPact NT06L1 630 A 4P draw out | LV847207 | Circuit breaker MasterPact MTZ1 06L1 - 630 A - 4P drawout - w/o MicroLogic | No | No |
| 47209 | basic frame MasterPact NT06H2 630 A 4P draw out | LV847209 | Circuit breaker MasterPact MTZ1 06H2 - 630 A - 4P drawout - w/o MicroLogic | No | No |
| 47210 | basic frame MasterPact NT08H1 800 A 3P draw out | LV847210 | Circuit breaker MasterPact MTZ1 08H1 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 47211 | basic frame MasterPact NT08H2 800 A 3P draw out | LV847211 | Circuit breaker MasterPact MTZ1 08H2 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 47212 | basic frame MasterPact NT08L1 800 A 3P draw out | LV847212 | Circuit breaker MasterPact MTZ1 08L1 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 47215 | basic frame MasterPact NT08H1 800 A 4P draw out | LV847215 | Circuit breaker MasterPact MTZ1 08H1 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 47217 | basic frame MasterPact NT08L1 800 A 4P draw out | LV847217 | Circuit breaker MasterPact MTZ1 08L1 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 47218 | basic frame MasterPact NT08H2 800 A 4P draw out | LV847218 | Circuit breaker MasterPact MTZ1 08H2 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 47220 | basic frame MasterPact NT10H1 1000 A 3P draw out | LV847220 | Circuit breaker MasterPact MTZ1 10H1 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 47221 | basic frame MasterPact NT10H2 1000 A 3P draw out | LV847221 | Circuit breaker MasterPact MTZ1 10H2 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 47222 | basic frame MasterPact NT10L1 1000 A 3P draw out | LV847222 | Circuit breaker MasterPact MTZ1 10L1 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 47225 | basic frame MasterPact NT10H1 1000 A 4P draw out | LV847225 | Circuit breaker MasterPact MTZ1 10H1 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 47227 | basic frame MasterPact NT10L1 1000 A 4P draw out | LV847227 | Circuit breaker MasterPact MTZ1 10L1 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 47228 | basic frame MasterPact NT10H2 1000 A 4P draw out | LV847228 | Circuit breaker MasterPact MTZ1 10H2 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 47230 | basic frame MasterPact NT12H1 1250 A 3P draw out | LV847230 | Circuit breaker MasterPact MTZ1 12H1 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 47231 | basic frame MasterPact NT12H2 1250 A 3P draw out | LV847231 | Circuit breaker MasterPact MTZ1 12H2 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 47235 | basic frame MasterPact NT12H1 1250 A 4P draw out | LV847235 | Circuit breaker MasterPact MTZ1 12H1 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 47237 | basic frame MasterPact NT12H2 1250 A 4P draw out | LV847237 | Circuit breaker MasterPact MTZ1 12H2 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 47240 | basic frame MasterPact NT16H1 1600 A 3P draw out | LV847240 | Circuit breaker MasterPact MTZ1 16H1 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 47241 | basic frame MasterPact NT16H2 1600 A 3P draw out | LV847241 | Circuit breaker MasterPact MTZ1 16H2 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 47245 | basic frame MasterPact NT16H1 1600 A 4P draw out | LV847245 | Circuit breaker MasterPact MTZ1 16H1 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 47247 | basic frame MasterPact NT16H2 1600 A 4P draw out | LV847247 | Circuit breaker MasterPact MTZ1 16H2 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 47248 | switch disconnector MasterPact NT06HA 3P 630 A 690 V draw out | LV847248 | Switch-disconnector MasterPact MTZ1 06 HA - 630 A - 3P drawout | Yes | Yes ^[1] |
| 47249 | switch disconnector MasterPact NT06HA 4P 630 A 690 V draw out | LV847249 | Switch-disconnector MasterPact MTZ1 06 HA - 630 A - 4P drawout | Yes | Yes ^[1] |
| 47250 | switch disconnector MasterPact NT08HA 3P 800 A 690 V draw out | LV847250 | Switch-disconnector MasterPact MTZ1 08 HA - 800 A - 3P drawout | Yes | Yes ^[1] |
| 47251 | switch disconnector MasterPact NT08HA 4P 800 A 690 V draw out | LV847251 | Switch-disconnector MasterPact MTZ1 08 HA - 800 A - 4P drawout | Yes | Yes ^[1] |

^[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|--------------------|
| 47252 | switch disconnector MasterPact NT10HA 3P 1000 A 690 V draw out | LV847252 | Switch-disconnector MasterPact MTZ1 10 HA - 1000 A - 3P drawout | Yes | Yes ^[1] |
| 47253 | switch disconnector MasterPact NT10HA 4P 1000 A 690 V draw out | LV847253 | Switch-disconnector MasterPact MTZ1 10 HA - 1000 A - 4P drawout | Yes | Yes ^[1] |
| 47254 | switch disconnector MasterPact NT12HA 3P 1250 A 690 V draw out | LV847254 | Switch-disconnector MasterPact MTZ1 12 HA - 1250 A - 3P drawout | Yes | Yes ^[1] |
| 47255 | switch disconnector MasterPact NT12HA 4P 1250 A 690 V draw out | LV847255 | Switch-disconnector MasterPact MTZ1 12 HA - 1250 A - 4P drawout | Yes | Yes ^[1] |
| 47256 | switch disconnector MasterPact NT16HA 3P 1600 A 690 V draw out | LV847256 | Switch-disconnector MasterPact MTZ1 16 HA - 1600 A - 3P drawout | Yes | Yes ^[1] |
| 47257 | switch disconnector MasterPact NT16HA 4P 1600 A 690 V draw out | LV847257 | Switch-disconnector MasterPact MTZ1 16 HA - 1600 A - 4P drawout | Yes | Yes ^[1] |
| 47280 | TRIP UNIT MicroLogic 2.0 E FOR MasterPact NT/NW FIXE | LV847280 | Control unit MicroLogic 2.0 X - for fixed MasterPact MTZ | No | No |
| 47281 | TRIP UNIT MicroLogic 2.0 E FOR MasterPact NT DRAWOUT | LV847281 | Control unit MicroLogic 2.0 X - for drawout MasterPact MTZ1 | No | No |
| 47283 | TRIP UNIT MicroLogic 5.0 E FOR MasterPact NT/NW FIXE | LV847283 | Control unit MicroLogic 5.0 X - for fixed MasterPact MTZ | No | No |
| 47284 | TRIP UNIT MicroLogic 5.0 E FOR MasterPact NT DRAWOUT | LV847284 | Control unit MicroLogic 5.0 X - for drawout MasterPact MTZ1 | No | No |
| 47287 | trip unit MicroLogic 7.0 A 3/4 poles | LV847287 | Control unit MicroLogic 7.0 X - for fixed MasterPact MTZ | No | No |
| 47288 | TRIP UNIT MicroLogic 6.0 E FOR MasterPact NT/NW FIXE | LV847288 | Control unit MicroLogic 6.0 X - for fixed MasterPact MTZ | No | No |
| 47292 | TRIP UNIT MicroLogic 6.0 E FOR MasterPact NT DRAWOUT | LV847292 | Control unit MicroLogic 6.0 X - for drawout MasterPact MTZ1 | No | No |
| 47311 | closing coil with communication XF com 24 V DC and AC 50 and 60Hz | LV847311 | XF communicating closing voltage release - 24 V AC 24/30 V DC - for fixed MTZ | No | No |
| 47312 | closing coil with communication XF com 48 V DC and AC 50 and 60Hz | LV847312 | XF communicating closing voltage release - 48 V AC 48/60 V DC - for fixed MTZ | No | No |
| 47313 | closing coil with communication XF com 100 to 130 V DC and AC 50 and 60 Hz | LV847313 | XF communicating closing voltage release - 100/130 V AC/DC - for fixed MTZ | No | No |
| 47314 | closing coil with communication XF com 200 to 250 V DC and AC 50 and 60 Hz | LV847314 | XF communicating closing voltage release - 200/250 V AC/DC - for fixed MTZ | No | No |
| 47315 | closing coil with communication XF com 277 V AC 50 and 60Hz | LV847315 | XF communicating closing voltage release - 277 V AC - for fixed MTZ | No | No |
| 47316 | closing coil with communication XF com 380 to 480 V AC 50 and 60Hz | LV847316 | XF communicating closing voltage release - 380/480 V AC - for fixed MTZ | No | No |
| 47321 | voltage release MX com 24 V DC and AC 50 and 60Hz | LV847321 | MX communicating opening voltage release - 24 V AC 24/30 V DC - for fixed MTZ | No | No |
| 47322 | voltage release MX com 48 V DC and AC 50 and 60Hz | LV847322 | MX communicating opening voltage release - 48 V AC 48/60V CC - for fixed MTZ | No | No |
| 47323 | voltage release MX com 100 to 130 V DC and AC 50 and 60 Hz | LV847323 | MX communicating opening voltage release - 100/130 V AC/DC - for fixed MTZ | No | No |
| 47324 | voltage release MX com 200 to 250 V DC and AC 50 and 60 Hz | LV847324 | MX communicating opening voltage release - 200/250 V AC/DC - for fixed MTZ | No | No |
| 47325 | voltage release MX com 277 V AC 50 and 60Hz | LV847325 | MX communicating opening voltage release - 277 V AC - for fixed MTZ | No | No |
| 47326 | voltage release MX com 380 to 480 V AC 50 and 60Hz | LV847326 | MX communicating opening voltage release - 380/480 V AC - for fixed MTZ | No | No |
| 47328 | front connection upside mounting for NT 06 to 16 3P | LV847328 | Front top connection - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 47329 | front connection downside mounting for NT 06 to 16 3P | LV847329 | Front bottom connection - for MTZ1 06-16 - 3P fixed | Yes | Yes |
| 47330 | front connection upside mounting for NT 06 to 16 4P | LV847330 | Front top connection - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 47331 | front connection downside mounting for NT 06 to 16 4P | LV847331 | Front bottom connection - for MTZ1 06-16 - 4P fixed | Yes | Yes |
| 47335 | ARC CHUTE INSULATING SCREEN FOR 3P FIXED NT | LV847335SP | Arc chute screen for MasterPact MTZ1 - 3P fixed | Yes | Yes |
| 47336 | ARC CHUTE INSULATING SCREEN FOR 4P FIXED NT | LV847336SP | Arc chute screen for MasterPact MTZ1 - 4P fixed | Yes | Yes |
| 47339 | auxiliary contact 1 OC low level | LV847339 | ON/OFF indication contact 1 OF - low level - for MTZ1 - fixed | Yes | Yes |
| 47340 | auxiliary contact 1 SDE | LV847340 | Additional SDE fault-trip indication contact - 6 A/240 VAC - for MTZ1 | Yes | Yes |
| 47341 | auxiliary contact 1 SDE low level | LV847341 | Additional SDE fault-trip indication contact - low level - for MTZ1 | Yes | Yes |
| 47342 | 1 READY-TO-CLOSE CONTACT FOR FIXED BREAK | LV847342 | PF ready-to-close contact - 5 A/240 VAC - for MTZ1 UL489 - fixed | Yes | Yes |
| 47343 | 1 LOW-LEVEL READY-TO-CLOSE CONTACT FOR F | LV847343 | PF ready-to-close contact - low level - for MTZ1 UL489 - fixed | Yes | Yes |
| 47344 | REMOTE RESET 100/130 VAC FOR FIXED BREAKER | LV847344 | RES electrical remote reset - 100-130 V AC - for MasterPact MTZ1 - fixed | Yes | Yes |
| 47345 | REMOTE RESET 200/240 VAC FOR FIXED BREAKER | LV847345 | RES electrical remote reset - 200-240 V AC - for MasterPact MTZ1 - fixed | Yes | Yes |
| 47346 | AUTOMATIC RESET | LV847346 | RAR automatic reset - for MasterPact MTZ2/MTZ3 fixed/ drawout | Yes | Yes |
| 47350 | closing coil XF 24 V DC and AC 50 and 60Hz | LV847350 | XF closing voltage release - 24 VAC 24/30 V DC - for fixed MTZ | Yes | Yes |
| 47351 | closing coil XF 48 V DC and AC 50 and 60Hz | LV847351 | XF closing voltage release - 48 VAC 48/60 V DC - for fixed MTZ | Yes | Yes |
| 47352 | closing coil XF 100 to 130 V DC and AC 50 and 60 Hz | LV847352 | XF closing voltage release - 100/130 V AC/DC - for fixed MTZ | Yes | Yes |

F

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|----------------|
| 47353 | closing coil XF 200 to 250 V DC and AC 50 and 60 Hz | LV847353 | XF closing voltage release - 200/250 V AC/DC - for fixed MTZ | Yes | Yes |
| 47354 | closing coil XF 277 V AC 50 and 60Hz | LV847354 | XF closing voltage release - 277 V AC - for fixed MTZ | Yes | Yes |
| 47355 | closing coil XF 380 to 480 V AC 50 and 60Hz | LV847355 | XF closing voltage release - 380/480 V AC - for fixed MTZ | Yes | Yes |
| 47360 | voltage release MX 24 to 30 V DC and AC 50 and 60 Hz | LV847360 | MX opening voltage release - 24 V AC 24/30 V DC - for fixed MTZ | Yes | Yes |
| 47361 | voltage release MX 48 V DC and AC 50 and 60Hz | LV847361 | MX opening voltage release - 48 V AC 48/60 V DC - for fixed MTZ | Yes | Yes |
| 47362 | voltage release MX 100 to 130 V DC and AC 50 and 60 Hz | LV847362 | MX opening voltage release - 100/130 V AC/DC - for fixed MTZ | Yes | Yes |
| 47363 | voltage release MX 200 to 250 V DC and AC 50 and 60 Hz | LV847363 | MX opening voltage release - 200/250 V AC/DC - for fixed MTZ | Yes | Yes |
| 47364 | voltage release MX 277 V AC 50 and 60Hz | LV847364 | MX opening voltage release - 277 V AC - for fixed MTZ | Yes | Yes |
| 47365 | voltage release MX 380 to 480 V AC 50 and 60Hz | LV847365 | MX opening voltage release - 380/480 V AC - for fixed MTZ | Yes | Yes |
| 47370 | shunt trip MX 24 V DC and AC 50 and 60Hz | LV847370 | MX 2nd opening voltage release - 24 V AC 24/30 V DC - for fixed MTZ | Yes | Yes |
| 47371 | shunt trip MX 48 V DC and AC 50 and 60Hz | LV847371 | MX 2nd opening voltage release - 48 V AC 48/60 V DC - for fixed MTZ | Yes | Yes |
| 47372 | shunt trip MX 100 to 130 V DC and AC 50 and 60 Hz | LV847372 | MX 2nd opening voltage release - 100/130 V AC/DC - for fixed MTZ | Yes | Yes |
| 47373 | shunt trip MX 200 to 250 V DC and AC 50 and 60 Hz | LV847373 | MX 2nd opening voltage release - 200/250 V AC/DC - for fixed MTZ | Yes | Yes |
| 47374 | shunt trip MX 277 V AC 50 and 60Hz | LV847374 | MX 2nd opening voltage release - 277 V AC - for fixed MTZ | Yes | Yes |
| 47375 | shunt trip MX 380 to 480 V AC 50 and 60Hz | LV847375 | MX 2nd opening voltage release - 380/480 V AC - for fixed MTZ | Yes | Yes |
| 47380 | instantaneous undervoltage release MN 24 V DC and AC 50 and 60Hz | LV847380 | MN undervoltage release - 24 V AC 24/30 V DC - for fixed MTZ | Yes | Yes |
| 47381 | instantaneous undervoltage release MN 48 V DC and AC 50 and 60Hz | LV847381 | MN undervoltage release - 48 V AC 48/60 V DC - for fixed MTZ | Yes | Yes |
| 47382 | instantaneous undervoltage release MN 100 to 130 V DC and AC 50 and 60 Hz | LV847382 | MN undervoltage release - 100/130 V AC/DC - for fixed MTZ | Yes | Yes |
| 47383 | instantaneous undervoltage release MN 200 to 250 V DC and AC 50 and 60 Hz | LV847383 | MN undervoltage release - 200/250 V AC/DC - for fixed MTZ | Yes | Yes |
| 47385 | instantaneous undervoltage release MN 380 to 480 V AC 50 and 60Hz | LV847385 | MN undervoltage release - 380/480 V AC - for fixed MTZ | Yes | Yes |
| 47390 | motormechanism MCH 24 to 30 V DC | LV847390 | MCH gear motor - 24/30 V DC - for MTZ1 - fixed | Yes | Yes |
| 47391 | motormechanism MCH 048/060 VDC/VAC | LV847391 | MCH gear motor - 48 V AC - for MTZ1 - fixed | Yes | Yes |
| 47392 | motormechanism MCH 100 to 130 V DC | LV847392 | MCH gear motor - 100/130 V DC - for MTZ1 - fixed | Yes | Yes |
| 47393 | motormechanism MCH 200 to 250 V DC | LV847393 | MCH gear motor - 200/250 V DC - for MTZ1 - fixed | Yes | Yes |
| 47395 | motormechanism MCH 100 to 130 V AC | LV847395 | MCH gear motor - 100/130 V AC - for MTZ1 - fixed | Yes | Yes |
| 47396 | motormechanism MCH 200 to 240 V AC | LV847396 | MCH gear motor - 200/240 V AC - for MTZ1 - fixed | Yes | Yes |
| 47398 | motormechanism MCH 277 to 415 V AC | LV847398 | MCH gear motor - 277/415 V AC - for MTZ1 - fixed | Yes | Yes |
| 47400 | motormechanism MCH 440 to 480 V AC | LV847400 | MCH gear motor - 440/480 V AC - for MTZ1 - fixed | Yes | Yes |
| 47403 | M2C PROGRAMMABLE CONTACTS FOR FIXED BREA | LV847403 | M2C programmable contacts - for MTZ1/MTZ2/MTZ3 - fixed | No | No |
| 47412 | closing coil with communication XF com 24 V DC and AC 50 and 60Hz | LV847412 | XF com closing voltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | No | No |
| 47413 | closing coil with communication XF com 48 V DC and AC 50 and 60Hz | LV847413 | XF com closing voltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | No | No |
| 47414 | closing coil with communication XF com 100 to 130 V DC and AC 50 and 60 Hz | LV847414 | XF communicating closing voltage release - 100/130 V AC/DC - for drawout MTZ1 | No | No |
| 47415 | closing coil with communication XF com 200 to 250 V DC and AC 50 and 60 Hz | LV847415 | XF communicating closing voltage release - 200/250 V AC/DC - for drawout MTZ1 | No | No |
| 47416 | closing coil with communication XF com 277 V AC 50 and 60Hz | LV847416 | XF communicating closing voltage release - 277 V AC - for drawout MTZ1 | No | No |
| 47417 | closing coil with communication XF com 380 to 480 V AC 50 and 60Hz | LV847417 | XF communicating closing voltage release - 380/480 V AC - for drawout MTZ1 | No | No |
| 47430 | auxiliary contact 1 SDE | LV847430 | Additional SDE fault-trip indication contact - 6 A/240 VAC - for MTZ1 - drawout | Yes | Yes |
| 47431 | auxiliary contact 1 SDE low level | LV847431 | Additional SDE fault-trip indication contact - low level - for MTZ1 - drawout | Yes | Yes |
| 47432 | READY-TO-CLOSE CONTACT FOR DRAWOUT BREAK | LV847432 | PF ready-to-close contact - 5 A/240 VAC - for MTZ1 - drawout | Yes | Yes |
| 47433 | LOW-LEVEL READY-TO-CLOSE CONTACT FOR DRA | LV847433 | PF ready-to-close contact - low level - for MTZ1 - drawout | Yes | Yes |
| 47434 | REMOTE RESET 100-130VAC FOR DRAWOUT BREAKER | LV847434 | RES electrical remote reset - 100-130 V AC - for MasterPact MTZ1 - drawout | Yes | Yes |
| 47435 | REMOTE RESET 200-250VAC FOR DRAWOUT BREAKER | LV847435 | RES electrical remote reset - 200-240 V AC - for MasterPact MTZ1 - drawout | Yes | Yes |
| 47440 | closing coil XF 24 V DC and AC 50 and 60Hz | LV847440 | XF closing voltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | Yes | Yes |
| 47441 | closing coil XF 48 V DC and AC 50 and 60Hz | LV847441 | XF closing voltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | Yes | Yes |
| 47442 | closing coil XF 100 to 130 V DC and AC 50 and 60 Hz | LV847442 | XF closing voltage release - 100/130 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 47443 | closing coil XF 200 to 250 V DC and AC 50 and 60 Hz | LV847443 | XF closing voltage release - 200/250 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 47444 | closing coil XF 277 V AC 50 and 60Hz | LV847444 | XF closing voltage release - 277 V AC - for drawout MTZ1 | Yes | Yes |
| 47445 | closing coil XF 380 to 480 V AC 50 and 60Hz | LV847445 | XF closing voltage release - 380/480 V AC - for drawout MTZ1 | Yes | Yes |
| 47450 | shunt trip MX 24 V DC and AC 50 and 60Hz | LV847450 | MX 2nd opening voltage release - 24 V AC 24/30 V DC - for drawout MTZ1 | Yes | Yes |

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|--------------------|
| 47451 | shunt trip MX 48 V DC and AC 50 and 60Hz | LV847451 | MX 2nd opening voltage release - 48 V AC 48/60 V DC - for drawout MTZ1 | Yes | Yes |
| 47452 | shunt trip MX 100 to 130 V DC and AC 50 and 60 Hz | LV847452 | MX 2nd opening voltage release - 100/130 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 47453 | shunt trip MX 200 to 250 V DC and AC 50 and 60 Hz | LV847453 | MX 2nd opening voltage release - 200/250 V AC/DC - for drawout MTZ1 | Yes | Yes |
| 47454 | shunt trip MX 277 V AC 50 and 60Hz | LV847454 | MX 2nd opening voltage release - 277 V AC - for drawout MTZ1 | Yes | Yes |
| 47455 | shunt trip MX 380 to 480 V AC 50 and 60Hz | LV847455 | MX 2nd opening voltage release - 380/480 V AC - for drawout MTZ1 | Yes | Yes |
| 47460 | motormechanism MCH 24 to 30 V DC | LV847460 | MCH gear motor - 24/30 V DC - for MTZ1 - drawout | Yes | Yes |
| 47461 | motormechanism MCH 048/060 VDC/VAC | LV847461 | MCH gear motor - 48 V AC - for MTZ1 - drawout | Yes | Yes |
| 47462 | motormechanism MCH 100 to 130 V DC | LV847462 | MCH gear motor - 100/130 V DC - for MTZ1 - drawout | Yes | Yes |
| 47463 | motormechanism MCH 200 to 250 V DC | LV847463 | MCH gear motor - 200/250 V DC - for MTZ1 - drawout | Yes | Yes |
| 47465 | motormechanism MCH 100 to 130 V AC | LV847465 | MCH gear motor - 100/130 V AC - for MTZ1 - drawout | Yes | Yes |
| 47466 | motormechanism MCH 200 to 240 VAC | LV847466 | MCH gear motor - 200/240 VAC - for MTZ1 - drawout | Yes | Yes |
| 47468 | motormechanism MCH 277 to 415 VAC | LV847468 | MCH gear motor - 277/415 V AC - for MTZ1 - drawout | Yes | Yes |
| 47470 | motormechanism MCH 440 to 480 VAC | LV847470 | MCH gear motor - 440/480 V AC - for MTZ1 - drawout | Yes | Yes |
| 47483 | M2C PROGRAMMABLE CONTACTS FOR DRAWOUT BR | LV847483 | M2C programmable contacts - for MTZ1 - drawout | No | No |
| 47506 | VOLTAGE MEASUREMENT INPUT OPTION FOR FIXED BREAKER | LV847506 | PTE voltage measurement input - for MasterPact MTZ1/ MTZ2 - fixed | No | No |
| 47507 | VOLTAGE MEASUREMENT INPUT OPTION FOR DRAWOUT BREAKER | LV847507 | PTE voltage measurement input - for MasterPact MTZ1 - drawout | No | No |
| 47512 | BPFE ELECTRICAL CLOSING PUSHBUTTON | LV847512 | BPFE electrical closing pushbutton - 1 NO - for MTZ1 | No | No |
| 47514 | OFF POSITION LOCKING BY PADLOCKS AND BPFE SUPPORT | LV847514 | OFF-position locking - padlocking device+BPFE support - for MTZ1 | No | No |
| 47515 | OFF POSITION LOCKING KIT FOR PROFALUX KEYLOCK AND BPFE SUPPORT | LV847515SP | OFF-position locking - Profalux adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47516 | OFF POSITION LOCKING KIT FOR RONIS KEYLOCK AND BPFE SUPPORT | LV847515SP | OFF-position locking - Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47517 | OFF POSITION LOCKING KIT FOR KIRK KEYLOCK AND BPFE SUPPORT | LV847517SP | OFF-position locking - Kirk adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47518 | OFF POSITION LOCKING KIT FOR CASTELL KEYLOCK AND BPFE SUPPORT | LV847518SP | OFF-position locking - Castell adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47519 | OFF POSITION LOCKING WITH 1 PROFALUX KEYLOCK | LV847519 | OFF-position locking - 1 Profalux keylock 2 keys + adaptation kit - for MTZ1 | Yes | Yes |
| 47520 | OFF POSITION LOCKING WITH 2 PROFALUX KEYLOCKS (SAME KEY) | LV847520 | OFF-position locking - 2 Profalux keylocks 1 key + adaptation kit - for MTZ1 | Yes | Yes |
| 47521 | OFF POSITION LOCKING WITH 1 RONIS KEYLOCK | LV847521 | OFF-position locking - 1 Ronis keylock 2 keys + adaptation kit - for MTZ1 | Yes | Yes |
| 47522 | OFF POSITION LOCKING WITH 2 RONIS KEYLOCKS (SAME KEY) | LV847522 | OFF-position locking - 2 Ronis keylocks 1 key + adaptation kit - for MTZ1 | Yes | Yes |
| 47829 | 2 ADDITIONAL SUPPORT BRACKETS FOR VERT. MOUNT FIXED BREAKER | LV847829 | 2 Brackets for mounting on a back plate - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 47850 | 6-WIRE AUXILIARY TERMINAL BLOCK FOR DRAWOUT NW | LV847850SP | 6 wires terminal block - 1 part - for MasterPact MTZ2/MTZ3 - drawout SPARE PART | Yes | Yes |
| 47898 | CHASSIS 3WIRE AUX TERMIN. NW X30 | LV847898SP | 3 wires terminal block - 30 parts - for MasterPact MTZ2/ MTZ3 - drawout SPARE PART | Yes | Yes |
| 47899 | CHASSIS 6WIRE AUX TERMIN. NW X10 | LV847899SP | 6 wires terminal block - 10 parts - for MasterPact MTZ2/ MTZ3 - drawout spare part | Yes | Yes |
| 47900 | JUMPERS X10 | LV847900SP | Jumpers (10 parts) - for MTZ1/MTZ2/MTZ3 - spare part | No | No |
| 47906 | COM WIRING AND MICROSWITCHES NT | LV847906 | Microswitches OF/SDE/PF and wiring - for MasterPact MTZ1 | No | No |
| 47926 | CABLE-TYPE INTERLOCK PLATE FOR FIXED OR DRAWOUT BREAKER | LV847926SP | Cable adaptation fixture - for MasterPact MTZ2/MTZ3 - fixed/drawout spare part | Yes | Yes |
| 47930 | 2 ROD-TYPE INTERLOCK PLATES FOR FIXED OR DRAWOUT NW | LV847930SP | 2 rod interlocking adaptation fixture - for MTZ2/MTZ3 - spare part | Yes | Yes |
| 48000 | basic frame MasterPact NW08N1 800 A 3P fixed | LV848000 | Circuit breaker MasterPact MTZ2 08N1 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 48001 | basic frame MasterPact NW08H1 800 A 3P fixed | LV848001 | Circuit breaker MasterPact MTZ2 08H1 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 48002 | basic frame MasterPact NW08H2 800 A 3P fixed | LV848002 | Circuit breaker MasterPact MTZ2 08H2 - 800 A - 3P fixed - w/o MicroLogic | No | No |
| 48004 | switch disconnector MasterPact NW08NA 3P 800 A 690 V fixed | LV848004 | Switch-disconnector MasterPact MTZ2 08 NA - 800 A - 3P fixed | Yes | Yes ^[1] |
| 48005 | switch disconnector MasterPact NW08HA 3P 800 A 690 V fixed | LV848005 | Switch-disconnector MasterPact MTZ2 08 HA - 800 A - 3P fixed | Yes | Yes ^[1] |
| 48007 | basic frame MasterPact NW08N1 800 A 4P fixed | LV848007 | Circuit breaker MasterPact MTZ2 08N1 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 48008 | basic frame MasterPact NW08H1 800 A 4P fixed | LV848008 | Circuit breaker MasterPact MTZ2 08H1 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 48009 | basic frame MasterPact NW08H2 800 A 4P fixed | LV848009 | Circuit breaker MasterPact MTZ2 08H2 - 800 A - 4P fixed - w/o MicroLogic | No | No |
| 48011 | switch disconnector MasterPact NW08NA 4P 800 A 690 V fixed | LV848011 | Switch-disconnector MasterPact MTZ2 08 NA - 800 A - 4P fixed | Yes | Yes ^[1] |
| 48012 | switch disconnector MasterPact NW08HA 4P 800 A 690 V fixed | LV848012 | Switch-disconnector MasterPact MTZ2 08 HA - 800 A - 4P fixed | Yes | Yes ^[1] |
| 48014 | basic frame MasterPact NW10N1 1000 A 3P fixed | LV848014 | Circuit breaker MasterPact MTZ2 10N1 - 1000 A - 3P fixed - w/o MicroLogic | No | No |
| 48015 | basic frame MasterPact NW10H1 1000 A 3P fixed | LV848015 | Circuit breaker MasterPact MTZ2 10H1 - 1000 A - 3P fixed - w/o MicroLogic | No | No |

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|--------------------|
| 48016 | basic frame MasterPact NW10H2 1000 A 3P fixed | LV848016 | Circuit breaker MasterPact MTZ2 10H2 - 1000 A - 3P fixed - w/o MicroLogic | No | No |
| 48018 | switch disconnector MasterPact NW10NA 3P 1000 A 690 V fixed | LV848018 | Switch-disconnector MasterPact MTZ2 10 NA - 1000 A - 3P fixed | Yes | Yes ^[1] |
| 48019 | switch disconnector MasterPact NW10HA 3P 1000 A 690 V fixed | LV848019 | Switch-disconnector MasterPact MTZ2 10 HA - 1000 A - 3P fixed | Yes | Yes ^[1] |
| 48021 | basic frame MasterPact NW10N1 1000 A 4P fixed | LV848021 | Circuit breaker MasterPact MTZ2 10N1 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 48022 | basic frame MasterPact NW10H1 1000 A 4P fixed | LV848022 | Circuit breaker MasterPact MTZ2 10H1 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 48023 | basic frame MasterPact NW10H2 1000 A 4P fixed | LV848023 | Circuit breaker MasterPact MTZ2 10H2 - 1000 A - 4P fixed - w/o MicroLogic | No | No |
| 48025 | switch disconnector MasterPact NW10NA 4P 1000 A 690 V fixed | LV848025 | Switch-disconnector MasterPact MTZ2 10 NA - 1000 A - 4P fixed | Yes | Yes ^[1] |
| 48026 | switch disconnector MasterPact NW10HA 4P 1000 A 690 V fixed | LV848026 | Switch-disconnector MasterPact MTZ2 10 HA - 1000 A - 4P fixed | Yes | Yes ^[1] |
| 48028 | basic frame MasterPact NW12N1 1250 A 3P fixed | LV848028 | Circuit breaker MasterPact MTZ2 12N1 - 1250 A - 3P fixed - w/o MicroLogic | No | No |
| 48029 | basic frame MasterPact NW12H1 1250 A 3P fixed | LV848029 | Circuit breaker MasterPact MTZ2 12H1 - 1250 A - 3P fixed - w/o MicroLogic | No | No |
| 48030 | basic frame MasterPact NW12H2 1250 A 3P fixed | LV848030 | Circuit breaker MasterPact MTZ2 12H2 - 1250 A - 3P fixed - w/o MicroLogic | No | No |
| 48032 | switch disconnector MasterPact NW12NA 3P 1250 A 690 V fixed | LV848032 | Switch-disconnector MasterPact MTZ2 12 NA - 1250 A - 3P fixed | Yes | Yes ^[1] |
| 48033 | switch disconnector MasterPact NW12HA 3P 1250 A 690 V fixed | LV848033 | Switch-disconnector MasterPact MTZ2 12 HA - 1250 A - 3P fixed | Yes | Yes ^[1] |
| 48035 | basic frame MasterPact NW12N1 1250 A 4P fixed | LV848035 | Circuit breaker MasterPact MTZ2 12N1 - 1250 A - 4P fixed - w/o MicroLogic | No | No |
| 48036 | basic frame MasterPact NW12H1 1250 A 4P fixed | LV848036 | Circuit breaker MasterPact MTZ2 12H1 - 1250 A - 4P fixed - w/o MicroLogic | No | No |
| 48037 | basic frame MasterPact NW12H2 1250 A 4P fixed | LV848037 | Circuit breaker MasterPact MTZ2 12H2 - 1250 A - 4P fixed - w/o MicroLogic | No | No |
| 48039 | switch disconnector MasterPact NW12NA 4P 1250 A 690 V fixed | LV848039 | Switch-disconnector MasterPact MTZ2 12 NA - 1250 A - 4P fixed | Yes | Yes ^[1] |
| 48040 | switch disconnector MasterPact NW12HA 4P 1250 A 690 V fixed | LV848040 | Switch-disconnector MasterPact MTZ2 12 HA - 1250 A - 4P fixed | Yes | Yes ^[1] |
| 48042 | basic frame MasterPact NW16N1 1600 A 3P fixed | LV848042 | Circuit breaker MasterPact MTZ2 16N1 - 1600 A - 3P fixed - w/o MicroLogic | No | No |
| 48043 | basic frame MasterPact NW16H1 1600 A 3P fixed | LV848043 | Circuit breaker MasterPact MTZ2 16H1 - 1600 A - 3P fixed - w/o MicroLogic | No | No |
| 48044 | basic frame MasterPact NW16H2 1600 A 3P fixed | LV848044 | Circuit breaker MasterPact MTZ2 16H2 - 1600 A - 3P fixed - w/o MicroLogic | No | No |
| 48046 | switch disconnector MasterPact NW16NA 3P 1600 A 690 V fixed | LV848046 | Switch-disconnector MasterPact MTZ2 16 NA - 1600 A - 3P fixed | Yes | Yes ^[1] |
| 48047 | switch disconnector MasterPact NW16HA 3P 1600 A 690 V fixed | LV848047 | Switch-disconnector MasterPact MTZ2 16 HA - 1600 A - 3P fixed | Yes | Yes ^[1] |
| 48049 | basic frame MasterPact NW16N1 1600 A 4P fixed | LV848049 | Circuit breaker MasterPact MTZ2 16N1 - 1600 A - 4P fixed - w/o MicroLogic | No | No |
| 48050 | basic frame MasterPact NW16H1 1600 A 4P fixed | LV848050 | Circuit breaker MasterPact MTZ2 16H1 - 1600 A - 4P fixed - w/o MicroLogic | No | No |
| 48051 | basic frame MasterPact NW16H2 1600 A 4P fixed | LV848051 | Circuit breaker MasterPact MTZ2 16H2 - 1600 A - 4P fixed - w/o MicroLogic | No | No |
| 48053 | switch disconnector MasterPact NW16NA 4P 1600 A 690 V fixed | LV848053 | Switch-disconnector MasterPact MTZ2 16 NA - 1600 A - 4P fixed | Yes | Yes ^[1] |
| 48054 | switch disconnector MasterPact NW16HA 4P 1600 A 690 V fixed | LV848054 | Switch-disconnector MasterPact MTZ2 16 HA - 1600 A - 4P fixed | Yes | Yes ^[1] |
| 48056 | NW 20 N1 3P BASIC FRAME FIXED | LV848056 | Circuit breaker MasterPact MTZ2 20N1 - 2000 A - 3P fixed - w/o MicroLogic | No | No |
| 48057 | basic frame MasterPact NW20H1 2000 A 3P fixed | LV848057 | Circuit breaker MasterPact MTZ2 20H1 - 2000 A - 3P fixed - w/o MicroLogic | No | No |
| 48058 | basic frame MasterPact NW20H2 2000 A 3P fixed | LV848058 | Circuit breaker MasterPact MTZ2 20H2 - 2000 A - 3P fixed - w/o MicroLogic | No | No |
| 48060 | basic frame MasterPact NW20H1 2000 A 4P fixed | LV848060 | Circuit breaker MTZ2 20H1 - 2000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48061 | switch disconnector MasterPact NW20HA 3P 2000 A 690 V fixed | LV848061 | Switch-disconnector MasterPact MTZ2 20 HA - 2000 A - 3P fixed | Yes | Yes ^[1] |
| 48063 | NW 20 N1 4P BASIC FRAME FIXED | LV848063 | Circuit breaker MasterPact MTZ2 20N1 - 2000 A - 4P fixed - w/o MicroLogic | No | No |
| 48064 | basic frame MasterPact NW20H1 2000 A 4P fixed | LV848064 | Circuit breaker MasterPact MTZ2 20H1 - 2000 A - 4P fixed - w/o MicroLogic | No | No |
| 48065 | basic frame MasterPact NW20H2 2000 A 4P fixed | LV848065 | Circuit breaker MasterPact MTZ2 20H2 - 2000 A - 4P fixed - w/o MicroLogic | No | No |
| 48067 | basic frame MasterPact NW20H2 2000 A 4P fixed | LV848067 | Circuit breaker MTZ2 20H2 - 2000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48068 | switch disconnector MasterPact NW20HA 4P 2000 A 690 V fixed | LV848068 | Switch-disconnector MasterPact MTZ2 20 HA - 2000 A - 4P fixed | Yes | Yes ^[1] |
| 48070 | basic frame MasterPact NW25H1 2500 A 3P fixed | LV848070 | Circuit breaker MasterPact MTZ2 25H1 - 2500 A - 3P fixed - w/o MicroLogic | No | No |
| 48071 | basic frame MasterPact NW25H2 2500 A 3P fixed | LV848071 | Circuit breaker MasterPact MTZ2 25H2 - 2500 A - 3P fixed - w/o MicroLogic | No | No |
| 48073 | basic frame MasterPact NW25H1 2500 A 4P fixed | LV848073 | Circuit breaker MTZ2 25H1 - 2500 A - 4P fixed, right neutral - w/o MicroLogic | No | No |

^[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|--------------------|
| 48074 | switch disconnector MasterPact NW25HA 3P 2500 A 690 V fixed | LV848074 | Switch-disconnector MasterPact MTZ2 25 HA - 2500 A - 3P fixed | Yes | Yes ^[1] |
| 48076 | basic frame MasterPact NW25H1 2500 A 4P fixed | LV848076 | Circuit breaker MasterPact MTZ2 25H1 - 2500 A - 4P fixed - w/o MicroLogic | No | No |
| 48077 | basic frame MasterPact NW25H2 2500 A 4P fixed | LV848077 | Circuit breaker MasterPact MTZ2 25H2 - 2500 A - 4P fixed - w/o MicroLogic | No | No |
| 48079 | basic frame MasterPact NW25H2 2500 A 4P fixed | LV848079 | Circuit breaker MTZ2 25H2 - 2500 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48080 | switch disconnector MasterPact NW25HA 4P 2500 A 690 V fixed | LV848080 | Switch-disconnector MasterPact MTZ2 25 HA - 2500 A - 4P fixed | Yes | Yes ^[1] |
| 48082 | basic frame MasterPact NW32H1 3200 A 3P fixed | LV848082 | Circuit breaker MasterPact MTZ2 32H1 - 3200 A - 3P fixed - w/o MicroLogic | No | No |
| 48083 | basic frame MasterPact NW32H2 3200 A 3P fixed | LV848083 | Circuit breaker MasterPact MTZ2 32H2 - 3200 A - 3P fixed - w/o MicroLogic | No | No |
| 48085 | switch disconnector MasterPact NW32HA 3P 3200 A 690 V fixed | LV848085 | Switch-disconnector MasterPact MTZ2 32 HA - 3200 A - 3P fixed | Yes | Yes ^[1] |
| 48087 | basic frame MasterPact NW32H1 3200 A 4P fixed | LV848087 | Circuit breaker MasterPact MTZ2 32H1 - 3200 A - 4P fixed - w/o MicroLogic | No | No |
| 48088 | basic frame MasterPact NW32H2 3200 A 4P fixed | LV848088 | Circuit breaker MasterPact MTZ2 32H2 - 3200 A - 4P fixed - w/o MicroLogic | No | No |
| 48090 | switch disconnector MasterPact NW32HA 4P 3200 A 690 V fixed | LV848090 | Switch-disconnector MasterPact MTZ2 32 HA - 3200 A - 4P fixed | Yes | Yes ^[1] |
| 48092 | basic frame MasterPact NW40H1 4000 A 3P fixed | LV848092 | Circuit breaker MasterPact MTZ2 40H1 - 4000 A - 3P fixed - w/o MicroLogic | No | No |
| 48093 | basic frame MasterPact NW40H2 4000 A 3P fixed | LV848093 | Circuit breaker MasterPact MTZ2 40H2 - 4000 A - 3P fixed - w/o MicroLogic | No | No |
| 48095 | switch disconnector MasterPact NW40HA 3P 4000 A 690 V fixed | LV848095 | Switch-disconnector MasterPact MTZ2 40 HA - 4000 A - 3P fixed | Yes | Yes ^[1] |
| 48097 | basic frame MasterPact NW40H1 4000 A 4P fixed | LV848097 | Circuit breaker MasterPact MTZ2 40H1 - 4000 A - 4P fixed - w/o MicroLogic | No | No |
| 48098 | basic frame MasterPact NW40H2 4000 A 4P fixed | LV848098 | Circuit breaker MasterPact MTZ2 40H2 - 4000 A - 4P fixed - w/o MicroLogic | No | No |
| 48100 | switch disconnector MasterPact NW40HA 4P 4000 A 690 V fixed | LV848100 | Switch-disconnector MasterPact MTZ2 40 HA - 4000 A - 4P fixed | Yes | Yes ^[1] |
| 48102 | basic frame MasterPact NW40H2 4000 A 4P fixed | LV848102 | Circuit breaker MTZ2 40H2 - 4000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48103 | basic frame MasterPact NW40bH2 4000 A 4P fixed | LV848103 | Circuit breaker MTZ3 40H2 - 4000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48104 | basic frame MasterPact NW50H2 5000 A 4P fixed | LV848104 | Circuit breaker MTZ3 50H2 - 5000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48105 | basic frame MasterPact NW63H2 6300 A 4P fixed | LV848105 | Circuit breaker MTZ3 63H2 - 6300 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48106 | basic frame MasterPact NW40bH1 4000 A 3P fixed | LV848106 | Circuit breaker MasterPact MTZ3 40H1 - 4000 A - 3P fixed - w/o MicroLogic | No | No |
| 48107 | basic frame MasterPact NW40bH2 4000 A 3P fixed | LV848107 | Circuit breaker MasterPact MTZ3 40H2 - 4000 A - 3P fixed - w/o MicroLogic | No | No |
| 48108 | switch disconnector MasterPact NW40bHA 3P 4000 A 690 V fixed | LV848108 | Switch-disconnector MasterPact MTZ3 40 HA - 4000 A - 3P fixed | Yes | Yes ^[1] |
| 48109 | basic frame MasterPact NW40bH1 4000 A 4P fixed | LV848109 | Circuit breaker MasterPact MTZ3 40H1 - 4000 A - 4P fixed - w/o MicroLogic | No | No |
| 48110 | basic frame MasterPact NW40bH2 4000 A 4P fixed | LV848110 | Circuit breaker MasterPact MTZ3 40H2 - 4000 A - 4P fixed - w/o MicroLogic | No | No |
| 48111 | switch disconnector MasterPact NW40bHA 4P 4000 A 690 V fixed | LV848111 | Switch-disconnector MasterPact MTZ3 40 HA - 4000 A - 4P fixed | Yes | Yes ^[2] |
| 48112 | basic frame MasterPact NW50H1 5000 A 3P fixed | LV848112 | Circuit breaker MasterPact MTZ3 50H1 - 5000 A - 3P fixed - w/o MicroLogic | No | No |
| 48113 | basic frame MasterPact NW50H2 5000 A 3P fixed | LV848113 | Circuit breaker MasterPact MTZ3 50H2 - 5000 A - 3P fixed - w/o MicroLogic | No | No |
| 48114 | switch disconnector MasterPact NW50HA 3P 5000 A 690 V fixed | LV848114 | Switch-disconnector MasterPact MTZ3 50 HA - 5000 A - 3P fixed | Yes | Yes ^[1] |
| 48115 | basic frame MasterPact NW50H1 5000 A 4P fixed | LV848115 | Circuit breaker MasterPact MTZ3 50H1 - 5000 A - 4P fixed - w/o MicroLogic | No | No |
| 48116 | basic frame MasterPact NW50H2 5000 A 4P fixed | LV848116 | Circuit breaker MasterPact MTZ3 50H2 - 5000 A - 4P fixed - w/o MicroLogic | No | No |
| 48117 | switch disconnector MasterPact NW50HA 4P 5000 A 690 V fixed | LV848117 | Switch-disconnector MasterPact MTZ3 50 HA - 5000 A - 4P fixed | Yes | Yes ^[2] |
| 48118 | basic frame MasterPact NW63H1 6300 A 3P fixed | LV848118 | Circuit breaker MasterPact MTZ3 63H1 - 6300 A - 3P fixed - w/o MicroLogic | No | No |
| 48119 | basic frame MasterPact NW63H2 6300 A 3P fixed | LV848119 | Circuit breaker MasterPact MTZ3 63H2 - 6300 A - 3P fixed - w/o MicroLogic | No | No |
| 48120 | switch disconnector MasterPact NW63HA 3P 6300 A 690 V fixed | LV848120 | Switch-disconnector MasterPact MTZ3 63 HA - 6300 A - 3P fixed | Yes | Yes ^[1] |
| 48121 | basic frame MasterPact NW63H1 6300 A 4P fixed | LV848121 | Circuit breaker MasterPact MTZ3 63H1 - 6300 A - 4P fixed - w/o MicroLogic | No | No |
| 48122 | basic frame MasterPact NW63H2 6300 A 4P fixed | LV848122 | Circuit breaker MasterPact MTZ3 63H2 - 6300 A - 4P fixed - w/o MicroLogic | No | No |
| 48123 | switch disconnector MasterPact NW63HA 4P 6300 A 690 V fixed | LV848123 | Switch-disconnector MasterPact MTZ3 63 HA - 6300 A - 4P fixed | Yes | Yes ^[2] |
| 48124 | front connection upside mounting for NW 20 3P | LV848124 | Front top connection - for MTZ2 20 - 3P fixed | Yes | Yes |
| 48125 | front connection downside mounting for NW 20 3P | LV848125 | Front bottom connection - for MTZ2 20 - 3P fixed | Yes | Yes |
| 48126 | front connection upside mounting for NW 20 4P | LV848126 | Front top connection - for MTZ2 20 - 4P fixed | Yes | Yes |

[1] For switch disconnector without communication capability only.

[2] For switch-disconnector without communication capability only, not for 4P right side neutral.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|---|----------------|----------------|
| 48127 | front connection downside mounting for NW 20 4P | LV848127 | Front bottom connection - for MTZ2 20 - 4P fixed | Yes | Yes |
| 48128 | front connection upside mounting for NW 08 to 16 3P | LV848128 | Front top connection - for MTZ2 08-16 - 3P fixed | Yes | Yes |
| 48129 | front connection upside mounting for NW 25 to 32 3P | LV848129 | Front top connection - for MTZ2 25-32 - 3P fixed | Yes | Yes |
| 48130 | front connection downside mounting for NW 08 to 16 3P | LV848130 | Front bottom connection - for MTZ2 08-16 - 3P fixed | Yes | Yes |
| 48131 | front connection downside mounting for NW 25 to 32 3P | LV848131 | Front bottom connection - for MTZ2 25-32 - 3P fixed | Yes | Yes |
| 48133 | rear connection upside vertical mounting for NW 08 to 20 3P | LV848133 | Rear top connection, vertical - for MTZ2 08-20 - 3P fixed or drawout | Yes | Yes |
| 48134 | rear connection upside vertical mounting for NW 25 to 32 3P | LV848134 | Rear top connection, vertical - for MTZ2 25-32 - 3P fixed or drawout | Yes | Yes |
| 48135 | rear connection upside vertical mounting for NW 40 3P | LV848135 | Rear top connection, vertical - for MTZ2 40 - 3P fixed or drawout | Yes | Yes |
| 48136 | rear connection upside vertical mounting for NW 40 to 50 3P | LV848136 | Rear top connection, vertical - for MTZ3 40-50 - 3P fixed or drawout | Yes | Yes |
| 48137 | rear connection upside vertical mounting for NW 63 3P | LV848137 | Rear top connection, vertical - for MTZ3 63 - 3P fixed or drawout | Yes | Yes |
| 48138 | rear connection downside vertical mounting for NW 08 to 20 3P | LV848138 | Rear bottom connection, vertical - for MTZ2 08-20 - 3P fixed or drawout | Yes | Yes |
| 48139 | rear connection downside vertical mounting for NW 25 to 32 3P | LV848139 | Rear bottom connection, vertical - for MTZ2 25-32 - 3P fixed or drawout | Yes | Yes |
| 48140 | rear connection downside vertical mounting for NW 40 3P | LV848140 | Rear bottom connection, vertical - for MTZ2 40 - 3P fixed or drawout | Yes | Yes |
| 48141 | rear connection downside vertical mounting for NW 40 to 50 3P | LV848141 | Rear bottom connection, vertical - for MTZ3 40-50 - 3P fixed or drawout | Yes | Yes |
| 48142 | rear connection downside vertical mounting for NW 63 3P | LV848142 | Rear bottom connection, vertical - for MTZ3 63 - 3P fixed or drawout | Yes | Yes |
| 48143 | rear connection upside horizontal mounting for NW 08 to 20 3P | LV848143 | Rear top connection, horizontal - for MTZ2 08-20 - 3P fixed or drawout | Yes | Yes |
| 48144 | rear connection upside horizontal mounting for NW 25 to 32 3P | LV848144 | Rear top connection, horizontal - for MTZ2 25-32 - 3P fixed or drawout | Yes | Yes |
| 48145 | rear connection upside horizontal mounting for NW 40 3P | LV848145 | Rear top connection, horizontal - for MTZ2 40 - 3P fixed or drawout | Yes | Yes |
| 48146 | rear connection upside horizontal mounting for NW 40 to 50 3P | LV848146 | Rear top connection, horizontal - for MTZ3 40-50 - 3P fixed or drawout | Yes | Yes |
| 48148 | rear connection downside horizontal mounting for NW 08 to 20 3P | LV848148 | Rear bottom connection, horizontal - for MTZ2 08-20 - 3P fixed or drawout | Yes | Yes |
| 48149 | rear connection downside horizontal mounting for NW 25 to 32 3P | LV848149 | Rear bottom connection, horizontal - for MTZ2 25-32 - 3P fixed or drawout | Yes | Yes |
| 48150 | rear connection downside horizontal mounting for NW 40 3P | LV848150 | Rear bottom connection, horizontal - for MTZ2 40 - 3P fixed or drawout | Yes | Yes |
| 48151 | rear connection downside horizontal mounting for NW 40 to 50 3P | LV848151 | Rear bottom connection, horizontal - for MTZ3 40-50 - 3P fixed or drawout | Yes | Yes |
| 48153 | front connection upside mounting for NW 08 to 16 4P | LV848153 | Front top connection - for MTZ2 08-16 - 4P fixed | Yes | Yes |
| 48154 | front connection upside mounting for NW 25 to 32 4P | LV848154 | Front top connection - for MTZ2 25-32 - 4P fixed | Yes | Yes |
| 48155 | front connection downside mounting for NW 08 to 16 4P | LV848155 | Front bottom connection - for MTZ2 08-16 - 4P fixed | Yes | Yes |
| 48156 | front connection downside mounting for NW 25 to 32 4P | LV848156 | Front bottom connection - for MTZ2 25-32 - 4P fixed | Yes | Yes |
| 48158 | rear connection upside vertical mounting for NW 08 to 20 4P | LV848158 | Rear top connection, vertical - for MTZ2 08-20 - 4P fixed or drawout | Yes | Yes |
| 48159 | rear connection upside vertical mounting for NW 25 to 32 4P | LV848159 | Rear top connection, vertical - for MTZ2 25-32 - 4P fixed or drawout | Yes | Yes |
| 48160 | rear connection upside vertical mounting for NW 40 4P | LV848160 | Rear top connection, vertical - for MTZ2 40 - 4P fixed or drawout | Yes | Yes |
| 48161 | rear connection upside vertical mounting for NW 40 to 50 4P | LV848161 | Rear top connection, vertical - for MTZ3 40-50 - 4P fixed or drawout | Yes | Yes |
| 48162 | rear connection upside vertical mounting for NW 63 4P | LV848162 | Rear top connection, vertical - for MTZ3 63 - 4P fixed or drawout | Yes | Yes |
| 48163 | rear connection downside vertical mounting for NW 08 to 20 4P | LV848163 | Rear bottom connection, vertical - for MTZ2 08-20 - 4P fixed or drawout | Yes | Yes |
| 48164 | rear connection downside vertical mounting for NW 25 to 32 4P | LV848164 | Rear bottom connection, vertical - for MTZ2 25-32 - 4P fixed or drawout | Yes | Yes |
| 48165 | rear connection downside vertical mounting for NW 40 4P | LV848165 | Rear bottom connection, vertical - for MTZ2 40 - 4P fixed or drawout | Yes | Yes |
| 48166 | rear connection downside vertical mounting for NW 40 to 50 4P | LV848166 | Rear bottom connection, vertical - for MTZ3 40-50 - 4P fixed or drawout | Yes | Yes |
| 48167 | rear connection downside vertical mounting for NW 63 4P | LV848167 | Rear bottom connection, vertical - for MTZ3 63 - 4P fixed or drawout | Yes | Yes |
| 48168 | rear connection upside horizontal mounting for NW 08 to 20 4P | LV848168 | Rear top connection, horizontal - for MTZ2 08-20 - 4P fixed or drawout | Yes | Yes |
| 48169 | rear connection upside horizontal mounting for NW 25 to 32 4P | LV848169 | Rear top connection, horizontal - for MTZ2 25-32 - 4P fixed or drawout | Yes | Yes |
| 48170 | rear connection upside horizontal mounting for NW 40 4P | LV848170 | Rear top connection, horizontal - for MTZ2 40 - 4P fixed or drawout | Yes | Yes |
| 48171 | rear connection upside horizontal mounting for NW 40 to 50 4P | LV848171 | Rear top connection, horizontal - for MTZ3 40-50 - 4P fixed or drawout | Yes | Yes |

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|--|--------------------|--------------------|
| 48173 | rear connection downside horizontal mounting for NW 08 to 20 4P | LV848173 | Rear bottom connection, horizontal - MTZ2 08-20 - 4P fixed or drawout | Yes | Yes |
| 48174 | rear connection downside horizontal mounting for NW 25 to 32 4P | LV848174 | Rear bottom connection, horizontal - MTZ2 25-32 - 4P fixed or drawout | Yes | Yes |
| 48175 | rear connection downside horizontal mounting for NW 40 4P | LV848175 | Rear bottom connection, horizontal - MTZ2 40 - 4P fixed or drawout | Yes | Yes |
| 48176 | rear connection downside horizontal mounting for NW 40 to 50 4P | LV848176 | Rear bottom connection, horizontal - MTZ3 40-50 - 4P fixed or drawout | Yes | Yes |
| 48177 | basic frame MasterPact NW08H2 800 A 4P fixed | LV848177 | Circuit breaker MTZ2 08H2 - 800 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48178 | basic frame MasterPact NW10H2 1000 A 4P fixed | LV848178 | Circuit breaker MTZ2 10H2 - 1000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48179 | basic frame MasterPact NW12H2 1250 A 4P fixed | LV848179 | Circuit breaker MTZ2 12H2 - 1250 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48180 | basic frame MasterPact NW16H2 1600 A 4P fixed | LV848180 | Circuit breaker MTZ2 16H2 - 1600 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48181 | basic frame MasterPact NW32H2 3200 A 4P fixed | LV848181 | Circuit breaker MTZ2 32H2 - 3200 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48182 | CT neutral or ground fault protection for NW 40b to 63 | LV848182SP | CT neutral or ground fault protection - 4000/6300A - for MTZ2/MTZ3 spare part | Yes ^[1] | No |
| 48183 | basic frame MasterPact NW08H1 800 A 4P fixed | LV848183 | Circuit breaker MTZ2 08H1 - 800 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48184 | basic frame MasterPact NW10H1 1000 A 4P fixed | LV848184 | Circuit breaker MTZ2 10H1 - 1000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48185 | basic frame MasterPact NW12H1 1250 A 4P fixed | LV848185 | Circuit breaker MTZ2 12H1 - 1250 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48186 | basic frame MasterPact NW16H1 1600 A 4P fixed | LV848186 | Circuit breaker MTZ2 16H1 - 1600 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48187 | basic frame MasterPact NW32H1 3200 A 4P fixed | LV848187 | Circuit breaker MTZ2 32H1 - 3200 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48193 | basic frame MasterPact NW40H1 4000 A 4P fixed | LV848193 | Circuit breaker MTZ2 40H1 - 4000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48194 | basic frame MasterPact NW40bH1 4000 A 4P fixed | LV848194 | Circuit breaker MTZ3 40H1 - 4000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48195 | basic frame MasterPact NW50H1 5000 A 4P fixed | LV848195 | Circuit breaker MTZ3 50H1 - 5000 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48196 | basic frame MasterPact NW63H1 6300 A 4P fixed | LV848196 | Circuit breaker MTZ3 63H1 - 6300 A - 4P fixed, right neutral - w/o MicroLogic | No | No |
| 48198 | auxiliary contact 4 OC | LV848198 | ON/OFF indication contact block 4 OF - 5 A/240 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48200 | auxiliary contact 1 SDE | LV848200 | Additional SDE fault-trip contact - 6 A/240 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48201 | auxiliary contact 1 SDE low level | LV848201 | Additional SDE fault-trip indication contact - low level - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48202 | REMOTE RESET 100/130 VAC FOR FIXED BREAKER | LV848202 | RES electrical remote reset - 100-130 V AC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48203 | REMOTE RESET 200/240 VAC FOR FIXED BREAKER | LV848203 | RES electrical remote reset - 200-240 V AC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48206 | motormechanism MCH 24 to 30 V DC | LV848206 | MCH gear motor - 24/30 V DC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48207 | motormechanism MCH 048/060 VDC/VAC | LV848207 | MCH gear motor - 48 V AC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48208 | motormechanism MCH 100 to 130 V DC | LV848208 | MCH gear motor - 100/130 V DC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48209 | motormechanism MCH 200 to 250 V DC | LV848209 | MCH gear motor - 200/250 V DC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48211 | motormechanism MCH 100 to 130 VAC | LV848211 | MCH gear motor - 100/130 V AC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48212 | motormechanism MCH 200 to 240 VAC | LV848212 | MCH gear motor - 200/240 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48213 | motormechanism MCH 250 to 277 VAC | LV848213 | MCH gear motor - 250/277 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48214 | motormechanism MCH 380 to 415 VAC | LV848214 | MCH gear motor - 380/415 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48215 | motormechanism MCH 440 to 480 VAC | LV848215 | MCH gear motor - 440/480 VAC - for MTZ2/MTZ3 - fixed | Yes | Yes |
| 48226 | basic frame MasterPact NW08H1 800 A 4P draw out | LV848226 | Circuit breaker MTZ2 08H1 - 800 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48227 | basic frame MasterPact NW10H1 1000 A 4P draw out | LV848227 | Circuit breaker MTZ2 10H1 - 1000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48228 | basic frame MasterPact NW12H1 1250 A 4P draw out | LV848228 | Circuit breaker MTZ2 12H1 - 1250 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48229 | basic frame MasterPact NW16H1 1600 A 4P draw out | LV848229 | Circuit breaker MTZ2 16H1 - 1600 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48230 | basic frame MasterPact NW08N1 800 A 3P draw out | LV848230 | Circuit breaker MasterPact MTZ2 08N1 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 48231 | basic frame MasterPact NW08H1 800 A 3P draw out | LV848231 | Circuit breaker MasterPact MTZ2 08H1 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 48232 | basic frame MasterPact NW08H2 800 A 3P draw out | LV848232 | Circuit breaker MasterPact MTZ2 08H2 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 48233 | basic frame MasterPact NW08L1 800 A 3P draw out | LV848233 | Circuit breaker MasterPact MTZ2 08L1 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 48234 | switch disconnector MasterPact NW08NA 3P 800 A 690 V draw out | LV848234 | Switch-disconnector MasterPact MTZ2 08 NA - 800 A - 3P drawout | No | No |
| 48235 | switch disconnector MasterPact NW08HA 3P 800 A 690 V draw out | LV848235 | Switch-disconnector MasterPact MTZ2 08 HA - 800 A - 3P drawout | Yes | Yes ^[1] |
| 48237 | basic frame MasterPact NW08N1 800 A 4P draw out | LV848237 | Circuit breaker MasterPact MTZ2 08N1 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 48238 | basic frame MasterPact NW08H1 800 A 4P draw out | LV848238 | Circuit breaker MasterPact MTZ2 08H1 - 800 A - 4P drawout - w/o MicroLogic | No | No |

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|--------------------|
| 48239 | basic frame MasterPact NW08H2 800 A 4P draw out | LV848239 | Circuit breaker MasterPact MTZ2 08H2 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 48240 | basic frame MasterPact NW08L1 800 A 4P draw out | LV848240 | Circuit breaker MasterPact MTZ2 08L1 - 800 A - 4P drawout - w/o MicroLogic | No | No |
| 48241 | switch disconnector MasterPact NW08NA 4P 800 A 690 V draw out | LV848241 | Switch-disconnector MasterPact MTZ2 08 NA - 800 A - 4P drawout | No | No |
| 48242 | switch disconnector MasterPact NW08HA 4P 800 A 690 V draw out | LV848242 | Switch-disconnector MasterPact MTZ2 08 HA - 800 A - 4P drawout | Yes | Yes ^[1] |
| 48244 | basic frame MasterPact NW10N1 1000 A 3P draw out | LV848244 | Circuit breaker MasterPact MTZ2 10N1 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 48245 | basic frame MasterPact NW10H1 1000 A 3P draw out | LV848245 | Circuit breaker MasterPact MTZ2 10H1 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 48246 | basic frame MasterPact NW10H2 1000 A 3P draw out | LV848246 | Circuit breaker MasterPact MTZ2 10H2 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 48247 | basic frame MasterPact NW10L1 1000 A 3P draw out | LV848247 | Circuit breaker MasterPact MTZ2 10L1 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 48248 | switch disconnector MasterPact NW10NA 3P 1000 A 690 V draw out | LV848248 | Switch-disconnector MasterPact MTZ2 10 NA - 1000 A - 3P drawout | No | No |
| 48249 | switch disconnector MasterPact NW10HA 3P 1000 A 690 V draw out | LV848249 | Switch-disconnector MasterPact MTZ2 10 HA - 1000 A - 3P drawout | Yes | Yes ^[3] |
| 48251 | basic frame MasterPact NW10N1 1000 A 4P draw out | LV848251 | Circuit breaker MasterPact MTZ2 10N1 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 48252 | basic frame MasterPact NW10H1 1000 A 4P draw out | LV848252 | Circuit breaker MasterPact MTZ2 10H1 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 48253 | basic frame MasterPact NW10H2 1000 A 4P draw out | LV848253 | Circuit breaker MasterPact MTZ2 10H2 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 48254 | basic frame MasterPact NW10L1 1000 A 4P draw out | LV848254 | Circuit breaker MasterPact MTZ2 10L1 - 1000 A - 4P drawout - w/o MicroLogic | No | No |
| 48255 | switch disconnector MasterPact NW10NA 4P 1000 A 690 V draw out | LV848255 | Switch-disconnector MasterPact MTZ2 10 NA - 1000 A - 4P drawout | No | No |
| 48256 | switch disconnector MasterPact NW10HA 4P 1000 A 690 V draw out | LV848256 | Switch-disconnector MasterPact MTZ2 10 HA - 1000 A - 4P drawout | Yes | Yes ^[1] |
| 48258 | basic frame MasterPact NW12N1 1250 A 3P draw out | LV848258 | Circuit breaker MasterPact MTZ2 12N1 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 48259 | basic frame MasterPact NW12H1 1250 A 3P draw out | LV848259 | Circuit breaker MasterPact MTZ2 12H1 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 48260 | basic frame MasterPact NW12H2 1250 A 3P draw out | LV848260 | Circuit breaker MasterPact MTZ2 12H2 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 48261 | basic frame MasterPact NW12L1 1250 A 3P draw out | LV848261 | Circuit breaker MasterPact MTZ2 12L1 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 48262 | switch disconnector MasterPact NW12NA 3P 1250 A 690 V draw out | LV848262 | Switch-disconnector MasterPact MTZ2 12 NA - 1250 A - 3P drawout | No | No |
| 48263 | switch disconnector MasterPact NW12HA 3P 1250 A 690 V draw out | LV848263 | Switch-disconnector MasterPact MTZ2 12 HA - 1250 A - 3P drawout | Yes | Yes ^[1] |
| 48265 | basic frame MasterPact NW12N1 1250 A 4P draw out | LV848265 | Circuit breaker MasterPact MTZ2 12N1 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 48266 | basic frame MasterPact NW12H1 1250 A 4P draw out | LV848266 | Circuit breaker MasterPact MTZ2 12H1 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 48267 | basic frame MasterPact NW12H2 1250 A 4P draw out | LV848267 | Circuit breaker MasterPact MTZ2 12H2 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 48268 | basic frame MasterPact NW12L1 1250 A 4P draw out | LV848268 | Circuit breaker MasterPact MTZ2 12L1 - 1250 A - 4P drawout - w/o MicroLogic | No | No |
| 48269 | switch disconnector MasterPact NW12NA 4P 1250 A 690 V draw out | LV848269 | Switch-disconnector MasterPact MTZ2 12 NA - 1250 A - 4P drawout | No | No |
| 48270 | switch disconnector MasterPact NW12HA 4P 1250 A 690 V draw out | LV848270 | Switch-disconnector MasterPact MTZ2 12 HA - 1250 A - 4P drawout | Yes | Yes ^[1] |
| 48272 | basic frame MasterPact NW16N1 1600 A 3P draw out | LV848272 | Circuit breaker MasterPact MTZ2 16N1 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 48273 | basic frame MasterPact NW16H1 1600 A 3P draw out | LV848273 | Circuit breaker MasterPact MTZ2 16H1 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 48274 | basic frame MasterPact NW16H2 1600 A 3P draw out | LV848274 | Circuit breaker MasterPact MTZ2 16H2 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 48275 | basic frame MasterPact NW16L1 1600 A 3P draw out | LV848275 | Circuit breaker MasterPact MTZ2 16L1 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 48276 | switch disconnector MasterPact NW16NA 3P 1600 A 690 V draw out | LV848276 | Switch-disconnector MasterPact MTZ2 16 NA - 1600 A - 3P drawout | Yes | Yes ^[1] |
| 48277 | switch disconnector MasterPact NW16HA 3P 1600 A 690 V draw out | LV848277 | Switch-disconnector MasterPact MTZ2 16 HA - 1600 A - 3P drawout | Yes | Yes ^[1] |
| 48279 | basic frame MasterPact NW16N1 1600 A 4P draw out | LV848279 | Circuit breaker MasterPact MTZ2 16N1 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 48280 | basic frame MasterPact NW16H1 1600 A 4P draw out | LV848280 | Circuit breaker MasterPact MTZ2 16H1 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 48281 | basic frame MasterPact NW16H2 1600 A 4P draw out | LV848281 | Circuit breaker MasterPact MTZ2 16H2 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 48282 | basic frame MasterPact NW16L1 1600 A 4P draw out | LV848282 | Circuit breaker MasterPact MTZ2 16L1 - 1600 A - 4P drawout - w/o MicroLogic | No | No |
| 48283 | switch disconnector MasterPact NW16NA 4P 1600 A 690 V draw out | LV848283 | Switch-disconnector MasterPact MTZ2 16 NA - 1600 A - 4P drawout | Yes | Yes ^[1] |
| 48284 | switch disconnector MasterPact NW16HA 4P 1600 A 690 V draw out | LV848284 | Switch-disconnector MasterPact MTZ2 16 HA - 1600 A - 4P drawout | Yes | Yes ^[1] |
| 48286 | NW 20 N1 3P BASIC FRAME DRAWOUT | LV848286 | Circuit breaker MasterPact MTZ2 20N1 - 2000 A - 3P drawout - w/o MicroLogic | No | No |

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|--------------------|
| 48287 | basic frame MasterPact NW20H1 2000 A 3P draw out | LV848287 | Circuit breaker MasterPact MTZ2 20H1 - 2000 A - 3P drawout - w/o MicroLogic | No | No |
| 48288 | basic frame MasterPact NW20H2 2000 A 3P draw out | LV848288 | Circuit breaker MasterPact MTZ2 20H2 - 2000 A - 3P drawout - w/o MicroLogic | No | No |
| 48289 | basic frame MasterPact NW20H3 2000 A 3P draw out | LV848289 | Circuit breaker MasterPact MTZ2 20H3 - 2000 A - 3P drawout - w/o MicroLogic | No | No |
| 48290 | basic frame MasterPact NW20L1 2000 A 3P draw out | LV848290 | Circuit breaker MasterPact MTZ2 20L1 - 2000 A - 3P drawout - w/o MicroLogic | No | No |
| 48291 | switch disconnector MasterPact NW20HA 3P 2000 A 690 V draw out | LV848291 | Switch-disconnector MasterPact MTZ2 20 HA - 2000 A - 3P drawout | Yes | Yes ^[1] |
| 48293 | NW 20 N1 4P BASIC FRAME DRAWOUT | LV848293 | Circuit breaker MasterPact MTZ2 20N1 - 2000 A - 4P drawout - w/o MicroLogic | No | No |
| 48294 | basic frame MasterPact NW20H1 2000 A 4P draw out | LV848294 | Circuit breaker MasterPact MTZ2 20H1 - 2000 A - 4P drawout - w/o MicroLogic | No | No |
| 48295 | basic frame MasterPact NW20H2 2000 A 4P draw out | LV848295 | Circuit breaker MasterPact MTZ2 20H2 - 2000 A - 4P drawout - w/o MicroLogic | No | No |
| 48296 | basic frame MasterPact NW20H3 2000 A 4P draw out | LV848296 | Circuit breaker MasterPact MTZ2 20H3 - 2000 A - 4P drawout - w/o MicroLogic | No | No |
| 48297 | basic frame MasterPact NW20L1 2000 A 4P draw out | LV848297 | Circuit breaker MasterPact MTZ2 20L1 - 2000 A - 4P drawout - w/o MicroLogic | No | No |
| 48298 | switch disconnector MasterPact NW20HA 4P 2000 A 690 V draw out | LV848298 | Switch-disconnector MasterPact MTZ2 20 HA - 2000 A - 4P drawout | Yes | Yes ^[1] |
| 48300 | basic frame MasterPact NW25H1 2500 A 3P draw out | LV848300 | Circuit breaker MasterPact MTZ2 25H1 - 2500 A - 3P drawout - w/o MicroLogic | No | No |
| 48301 | basic frame MasterPact NW25H2 2500 A 3P draw out | LV848301 | Circuit breaker MasterPact MTZ2 25H2 - 2500 A - 3P drawout - w/o MicroLogic | No | No |
| 48302 | basic frame MasterPact NW25H3 2500 A 3P draw out | LV848302 | Circuit breaker MasterPact MTZ2 25H3 - 2500 A - 3P drawout - w/o MicroLogic | No | No |
| 48303 | basic frame MasterPact NW25H1 2500 A 4P draw out | LV848303 | Circuit breaker MTZ2 25H1 - 2500 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48304 | switch disconnector MasterPact NW25HA 3P 2500 A 690 V draw out | LV848304 | Switch-disconnector MasterPact MTZ2 25 HA - 2500 A - 3P drawout | Yes | Yes ^[1] |
| 48306 | basic frame MasterPact NW25H1 2500 A 4P draw out | LV848306 | Circuit breaker MasterPact MTZ2 25H1 - 2500 A - 4P drawout - w/o MicroLogic | No | No |
| 48307 | basic frame MasterPact NW25H2 2500 A 4P draw out | LV848307 | Circuit breaker MasterPact MTZ2 25H2 - 2500 A - 4P drawout - w/o MicroLogic | No | No |
| 48308 | basic frame MasterPact NW25H3 2500 A 4P draw out | LV848308 | Circuit breaker MasterPact MTZ2 25H3 - 2500 A - 4P drawout - w/o MicroLogic | No | No |
| 48309 | basic frame MasterPact NW25H2 2500 A 4P draw out | LV848309 | Circuit breaker MTZ2 25H2 - 2500 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48310 | switch disconnector MasterPact NW25HA 4P 2500 A 690 V draw out | LV848310 | Switch-disconnector MasterPact MTZ2 25 HA - 2500 A - 4P drawout | Yes | Yes ^[1] |
| 48312 | basic frame MasterPact NW32H1 3200 A 3P draw out | LV848312 | Circuit breaker MasterPact MTZ2 32H1 - 3200 A - 3P drawout - w/o MicroLogic | No | No |
| 48313 | basic frame MasterPact NW32H2 3200 A 3P draw out | LV848313 | Circuit breaker MasterPact MTZ2 32H2 - 3200 A - 3P drawout - w/o MicroLogic | No | No |
| 48314 | basic frame MasterPact NW32H3 3200 A 3P draw out | LV848314 | Circuit breaker MasterPact MTZ2 32H3 - 3200 A - 3P drawout - w/o MicroLogic | No | No |
| 48315 | switch disconnector MasterPact NW32HA 3P 3200 A 690 V draw out | LV848315 | Switch-disconnector MasterPact MTZ2 32 HA - 3200 A - 3P drawout | Yes | Yes ^[1] |
| 48317 | basic frame MasterPact NW32H1 3200 A 4P draw out | LV848317 | Circuit breaker MasterPact MTZ2 32H1 - 3200 A - 4P drawout - w/o MicroLogic | No | No |
| 48318 | basic frame MasterPact NW32H2 3200 A 4P draw out | LV848318 | Circuit breaker MasterPact MTZ2 32H2 - 3200 A - 4P drawout - w/o MicroLogic | No | No |
| 48319 | basic frame MasterPact NW32H3 3200 A 4P draw out | LV848319 | Circuit breaker MasterPact MTZ2 32H3 - 3200 A - 4P drawout - w/o MicroLogic | No | No |
| 48320 | switch disconnector MasterPact NW32HA 4P 3200 A 690 V draw out | LV848320 | Switch-disconnector MasterPact MTZ2 32 HA - 3200 A - 4P drawout | Yes | Yes ^[1] |
| 48322 | basic frame MasterPact NW40H1 4000 A 3P draw out | LV848322 | Circuit breaker MasterPact MTZ2 40H1 - 4000 A - 3P drawout - w/o MicroLogic | No | No |
| 48323 | basic frame MasterPact NW40H2 4000 A 3P draw out | LV848323 | Circuit breaker MasterPact MTZ2 40H2 - 4000 A - 3P drawout - w/o MicroLogic | No | No |
| 48324 | basic frame MasterPact NW40H3 4000 A 3P draw out | LV848324 | Circuit breaker MasterPact MTZ2 40H3 - 4000 A - 3P drawout - w/o MicroLogic | No | No |
| 48325 | switch disconnector MasterPact NW40HA 3P 4000 A 690 V draw out | LV848325 | Switch-disconnector MasterPact MTZ2 40 HA - 4000 A - 3P drawout | Yes | Yes ^[1] |
| 48327 | basic frame MasterPact NW40H1 4000 A 4P draw out | LV848327 | Circuit breaker MasterPact MTZ2 40H1 - 4000 A - 4P drawout - w/o MicroLogic | No | No |
| 48328 | basic frame MasterPact NW40H2 4000 A 4P draw out | LV848328 | Circuit breaker MasterPact MTZ2 40H2 - 4000 A - 4P drawout - w/o MicroLogic | No | No |
| 48329 | basic frame MasterPact NW40H3 4000 A 4P draw out | LV848329 | Circuit breaker MasterPact MTZ2 40H3 - 4000 A - 4P drawout - w/o MicroLogic | No | No |
| 48330 | switch disconnector MasterPact NW40HA 4P 4000 A 690 V draw out | LV848330 | Switch-disconnector MasterPact MTZ2 40 HA - 4000 A - 4P drawout | Yes | Yes ^[1] |
| 48332 | basic frame MasterPact NW40H1 4000 A 4P draw out | LV848332 | Circuit breaker MTZ2 40H1 - 4000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48333 | basic frame MasterPact NW40bH1 4000 A 4P draw out | LV848333 | Circuit breaker MTZ3 40H1 - 4000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48334 | basic frame MasterPact NW50H1 5000 A 4P draw out | LV848334 | Circuit breaker MTZ3 50H1 - 5000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48335 | basic frame MasterPact NW63H1 6300 A 4P draw out | LV848335 | Circuit breaker MTZ3 63H1 - 6300 A - 4P drawout, right neutral - w/o MicroLogic | No | No |

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|---|--------------------|--------------------|
| 48336 | basic frame MasterPact NW40bH1 4000 A 3P draw out | LV848336 | Circuit breaker MasterPact MTZ3 40H1 - 4000 A - 3P drawout - w/o MicroLogic | No | No |
| 48337 | basic frame MasterPact NW40bH2 4000 A 3P draw out | LV848337 | Circuit breaker MasterPact MTZ3 40H2 - 4000 A - 3P drawout - w/o MicroLogic | No | No |
| 48338 | switch disconnector MasterPact NW40bHA 3P 4000 A 690 V draw out | LV848338 | Switch-disconnector MasterPact MTZ3 40 HA - 4000 A - 3P drawout | Yes | Yes ^[1] |
| 48339 | basic frame MasterPact NW40bH1 4000 A 4P draw out | LV848339 | Circuit breaker MasterPact MTZ3 40H1 - 4000 A - 4P drawout - w/o MicroLogic | No | No |
| 48340 | basic frame MasterPact NW40bH2 4000 A 4P draw out | LV848340 | Circuit breaker MasterPact MTZ3 40H2 - 4000 A - 4P drawout - w/o MicroLogic | No | No |
| 48341 | switch disconnector MasterPact NW40bHA 4P 4000 A 690 V draw out | LV848341 | Switch-disconnector MasterPact MTZ3 40 HA - 4000 A - 4P drawout | Yes | Yes ^[1] |
| 48342 | basic frame MasterPact NW50H1 5000 A 3P draw out | LV848342 | Circuit breaker MasterPact MTZ3 50H1 - 5000 A - 3P drawout - w/o MicroLogic | No | No |
| 48343 | basic frame MasterPact NW50H2 5000 A 3P draw out | LV848343 | Circuit breaker MasterPact MTZ3 50H2 - 5000 A - 3P drawout - w/o MicroLogic | No | No |
| 48344 | switch disconnector MasterPact NW50HA 3P 5000 A 690 V draw out | LV848344 | Switch-disconnector MasterPact MTZ3 50 HA - 5000 A - 3P drawout | Yes | Yes ^[1] |
| 48345 | basic frame MasterPact NW50H1 5000 A 4P draw out | LV848345 | Circuit breaker MasterPact MTZ3 50H1 - 5000 A - 4P drawout - w/o MicroLogic | No | No |
| 48346 | basic frame MasterPact NW50H2 5000 A 4P draw out | LV848346 | Circuit breaker MasterPact MTZ3 50H2 - 5000 A - 4P drawout - w/o MicroLogic | No | No |
| 48347 | switch disconnector MasterPact NW50HA 4P 5000 A 690 V draw out | LV848347 | Switch-disconnector MasterPact MTZ3 50 HA - 5000 A - 4P drawout | Yes | Yes ^[1] |
| 48348 | basic frame MasterPact NW63H1 6300 A 3P draw out | LV848348 | Circuit breaker MasterPact MTZ3 63H1 - 6300 A - 3P drawout - w/o MicroLogic | No | No |
| 48349 | basic frame MasterPact NW63H2 6300 A 3P draw out | LV848349 | Circuit breaker MasterPact MTZ3 63H2 - 6300 A - 3P drawout - w/o MicroLogic | No | No |
| 48350 | switch disconnector MasterPact NW63HA 3P 6300 A 690 V draw out | LV848350 | Switch-disconnector MasterPact MTZ3 63 HA - 6300 A - 3P drawout | Yes | Yes ^[1] |
| 48351 | basic frame MasterPact NW63H1 6300 A 4P draw out | LV848351 | Circuit breaker MasterPact MTZ3 63H1 - 6300 A - 4P drawout - w/o MicroLogic | No | No |
| 48352 | basic frame MasterPact NW63H2 6300 A 4P draw out | LV848352 | Circuit breaker MasterPact MTZ3 63H2 - 6300 A - 4P drawout - w/o MicroLogic | No | No |
| 48353 | switch disconnector MasterPact NW63HA 4P 6300 A 690 V draw out | LV848353 | Switch-disconnector MasterPact MTZ3 63 HA - 6300 A - 4P drawout | Yes | Yes ^[1] |
| 48354 | basic frame MasterPact NW40H2 4000 A 4P draw out | LV848354 | Circuit breaker MTZ2 40H2 - 4000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48355 | basic frame MasterPact NW40bH2 4000 A 4P draw out | LV848355 | Circuit breaker MTZ3 40H2 - 4000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48356 | basic frame MasterPact NW50H2 5000 A 4P draw out | LV848356 | Circuit breaker MTZ3 50H2 - 5000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48357 | basic frame MasterPact NW63H2 6300 A 4P draw out | LV848357 | Circuit breaker MTZ3 63H2 - 6300 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48362 | trip unit MicroLogic 7.0 A 3/4 poles | LV848362 | Control unit MicroLogic 7.0 X - for drawout MasterPact MTZ2/MTZ3 | No | No |
| 48382 | M2C PROGRAMMABLE CONTACTS FOR DRAWOUT BR | LV848382 | M2C programmable contacts - for MTZ2/MTZ3/MTZ2 UL489 - drawout | No | No |
| 48391 | NW CHASSIS 3P 800/1250A N1 NA H1HA | LV848392 | Chassis for MasterPact MTZ2 08-16 N1/NA/H1/HA - 1600 A - 3P | No | Yes |
| 48392 | NW CHASSIS 3P 1600A N1 NA H1 HA 800/1600A H2 | LV848392 | Chassis for MasterPact MTZ2 08-16 N1/NA/H1/HA - 1600 A - 3P | No | Yes |
| 48393 | NW CHASSIS 3P 2000A | LV848393 | Chassis for MasterPact MTZ2 20 H1/H2 - 2000 A - 3P | Yes ^[2] | Yes |
| 48394 | NW CHASSIS 3P 2500A | LV848394 | Chassis for MasterPact MTZ2 25 H1/H2 - 2500 A - 3P | Yes ^[2] | Yes |
| 48395 | NW CHASSIS 3P 3200A | LV848395 | Chassis for MasterPact MTZ2 32 H1/H2 - 3200 A - 3P | Yes ^[2] | Yes |
| 48396 | NW CHASSIS 3P 4000A | LV848396 | Chassis for MasterPact MTZ2 40 H1/H2 - 4000 A - 3P | Yes ^[2] | Yes |
| 48397 | NW CHASSIS 3P 4000B/6300A | LV848397 | Chassis for MasterPact MTZ3 40-63 H1/H2 - 6300 A - 3P | Yes ^[2] | Yes |
| 48399 | NW CHASSIS 3P 800/1600A L1 | LV848399 | Chassis for MasterPact MTZ2 08-16 L1 - 1600 A - 3P | Yes ^[2] | Yes |
| 48400 | NW CHASSIS 3P 2000A L1 | LV848400 | Chassis for MasterPact MTZ2 20 L1 - 2000 A - 3P | Yes ^[2] | Yes |
| 48403 | NW CHASSIS 4P 800/1250A N1 N1 H1HA | LV848404 | Chassis for MasterPact MTZ2 08-16 H1 - 1600 A - 4P | Yes ^[2] | Yes |
| 48404 | NW CHASSIS 4P 1600A N1 NA H1 HA 800/1600A H2 | LV848404 | Chassis for MasterPact MTZ2 08-16 H1 - 1600 A - 4P | No | Yes |
| 48405 | NW CHASSIS 4P 2000A | LV848405 | Chassis for MasterPact MTZ2 20 H1/H2 - 2000 A - 4P | Yes ^[2] | Yes |
| 48406 | NW CHASSIS 4P 2500A | LV848406 | Chassis for MasterPact MTZ2 25 H1/H2/H3/HA/HF - 2500 A - 4P | Yes ^[2] | Yes |
| 48407 | NW CHASSIS 4P 3200A | LV848407 | Chassis for MasterPact MTZ2 32 H1/H2/H3/HA/HF - 3200 A - 4P | Yes ^[2] | Yes |
| 48408 | NW CHASSIS 4P 4000A | LV848408 | Chassis for MasterPact MTZ2 40 H1/H2/H3/HA/HF - 4000 A - 4P | Yes ^[2] | Yes |
| 48409 | NW CHASSIS 4P 4000B/6300A | LV848409 | Chassis for MasterPact MTZ3 63 H1/H2 - 6300 A - 4P | Yes ^[2] | Yes |
| 48411 | NW CHASSIS 4P 800/1600A L1 | LV848411 | Chassis for MasterPact MTZ2 08-16 L1 - 1600 A - 4P | Yes ^[2] | Yes |
| 48412 | NW CHASSIS 4P 2000A L1 | LV848412 | Chassis for MasterPact MTZ2 20 L1 - 2000 A - 4P | Yes ^[2] | Yes |
| 48413 | front connection upside mounting for NW 20 cradle 3P | LV848413 | Front top connection - for MTZ2 20 - 3P drawout | Yes | Yes |
| 48414 | front connection downside mounting for NW 20 cradle 3P | LV848414 | Front bottom connection - for MTZ2 20 - 3P drawout | Yes | Yes |
| 48415 | front connection upside mounting for NW 08 to 16 cradle 3P | LV848415 | Front top connection - for MTZ2 08-16 - 3P drawout | Yes | Yes |
| 48416 | front connection upside mounting for NW 25 to 32 cradle 3P | LV848416 | Front top connection - for MTZ2 25-32 - 3P drawout | Yes | Yes |
| 48417 | front connection upside mounting for NW 20 cradle 4P | LV848417 | Front top connection - for MTZ2 20 - 4P drawout | Yes | Yes |

[1] For switch disconnector without communication capability only.

[2] MicroLogic wiring is not the same. UC3, M2C and SDE2/RES terminal blocks positions are switched between. NW chassis doesn't allow the mounting of the EIFE option. Use the Retrofit kit for NW chassis - LV850065SP - for making compatible a NW chassis with a MTZ2 or a MTZ3 device.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|----------------|
| 48418 | front connection downside mounting for NW 08 to 16 cradle 3P | LV848418 | Front bottom connection - for MTZ2 08-16 - 3P drawout | Yes | Yes |
| 48419 | front connection downside mounting for NW 25 to 32 cradle 3P | LV848419 | Front bottom connection - for MTZ2 25-32 - 3P drawout | Yes | Yes |
| 48420 | front connection downside mounting for NW 20 cradle 4P | LV848420 | Front bottom connection - for MTZ2 20 - 4P drawout | Yes | Yes |
| 48421 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 800/1600A 3P | LV848421SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 3P fixed SPARE PART | Yes | Yes |
| 48422 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 2000/3200A 3P | LV848422SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 3P fixed SPARE PART | Yes | Yes |
| 48424 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 800/1600A 4P | LV848424SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 4P fixed SPARE PART | Yes | Yes |
| 48425 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 2000/3200A 4P | LV848425SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 4P fixed SPARE PART | Yes | Yes |
| 48426 | basic frame MasterPact NW08H2 800 A 4P drawout | LV848426 | Circuit breaker MTZ2 08H2 - 800 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48427 | basic frame MasterPact NW10H2 1000 A 4P drawout | LV848427 | Circuit breaker MTZ2 10H2 - 1000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48428 | basic frame MasterPact NW12H2 1250 A 4P drawout | LV848428 | Circuit breaker MTZ2 12H2 - 1250 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48429 | basic frame MasterPact NW16H2 1600 A 4P drawout | LV848429 | Circuit breaker MTZ2 16H2 - 1600 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48436 | basic frame MasterPact NW20H1 2000 A 4P drawout | LV848436 | Circuit breaker MTZ2 20H1 - 2000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48437 | basic frame MasterPact NW32H1 3200 A 4P drawout | LV848437 | Circuit breaker MTZ2 32H1 - 3200 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48438 | basic frame MasterPact NW20H2 2000 A 4P drawout | LV848438 | Circuit breaker MTZ2 20H2 - 2000 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48439 | basic frame MasterPact NW32H2 3200 A 4P drawout | LV848439 | Circuit breaker MTZ2 32H2 - 3200 A - 4P drawout, right neutral - w/o MicroLogic | No | No |
| 48441 | front connection upside mounting for NW 08 to 16 cradle 4P | LV848441 | Front top connection - for MTZ2 08-16 - 4P drawout | Yes | Yes |
| 48442 | front connection upside mounting for NW 25 to 32 cradle 4P | LV848442 | Front top connection - for MTZ2 25-32 - 4P drawout | Yes | Yes |
| 48444 | front connection downside mounting for NW 08 to 16 cradle 4P | LV848444 | Front bottom connection - for MTZ2 08-16 - 4P drawout | Yes | Yes |
| 48445 | front connection downside mounting for NW 25 to 32 cradle 4P | LV848445 | Front bottom connection - for MTZ2 25-32 - 4P drawout | Yes | Yes |
| 48449 | closing coil with communication XF com 24 V DC and AC 50 and 60Hz | LV848449 | XF com closing voltage release - 24 V AC 24/30 V DC - for drawout MTZ2/3 | No | No |
| 48450 | closing coil with communication XF com 48 V DC and AC 50 and 60Hz | LV848450 | XF com closing voltage release - 48 V AC 48/60 V DC - for drawout MTZ2/3 | No | No |
| 48451 | closing coil with communication XF com 100 to 130 V DC and AC 50 and 60 Hz | LV848451 | XF communicating closing voltage release - 100/130 V AC/DC - for drawout MTZ2/3 | No | No |
| 48452 | closing coil with communication XF com 200 to 250 V DC and AC 50 and 60 Hz | LV848452 | XF communicating closing voltage release - 200/250 V AC/DC - for drawout MTZ2/3 | No | No |
| 48453 | closing coil with communication XF com 277 V AC 50 and 60Hz | LV848453 | XF communicating closing voltage release - 277 V AC - for drawout MTZ2/3 | No | No |
| 48454 | closing coil with communication XF com 380 to 480 VAC 50 and 60Hz | LV848454 | XF communicating closing voltage release - 380/480 V AC - for drawout MTZ2/3 | No | No |
| 48458 | voltage release MX com 24 to 30 V DC and AC 50 and 60 Hz | LV848458 | MX com opening voltage release - 24 V AC 24/30 V DC - for drawout MTZ2/3 | No | No |
| 48459 | voltage release MX com 48 V DC and AC 50 and 60Hz | LV848459 | MX com opening voltage release - 48 V AC 48/60 V DC - for drawout MTZ2/3 | No | No |
| 48460 | voltage release MX com 100 to 130 V DC and AC 50 and 60 Hz | LV848460 | MX communicating opening voltage release - 100/130 V AC/DC - for drawout MTZ2/3 | No | No |
| 48461 | voltage release MX com 200 to 250 V DC and AC 50 and 60 Hz | LV848461 | MX communicating opening voltage release - 200/250 V AC/DC - for drawout MTZ2/3 | No | No |
| 48462 | voltage release MX com 277 VAC 50 and 60Hz | LV848462 | MX communicating opening voltage release - 277 VAC - for drawout MTZ2/3 | No | No |
| 48463 | voltage release MX com 380 to 480 VAC 50 and 60Hz | LV848463 | MX communicating opening voltage release - 380/480 V AC - for drawout MTZ2/3 | No | No |
| 48468 | auxiliary contact 4 OC | LV848468 | ON/OFF indication contact block 4 OF - 6 A/240 V AC - for MTZ2/MTZ3 | Yes | Yes |
| 48469 | 1 READY-TO-CLOSE CONTACT FOR DRAWOUT BRE | LV848469 | PF ready-to-close contact - 5 A/240 VAC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48470 | 1 LOW-LEVEL READY-TO-CLOSE CONTACT FOR D | LV848470 | PF ready-to-close contact - low level - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48472 | REMOTE RESET 100/130 VAC FOR DRAWOUT BREAKER | LV848472 | RES electrical remote reset - 100-130 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48473 | REMOTE RESET 200/250 VAC FOR DRAWOUT BREAKER | LV848473 | RES electrical remote reset - 200-240 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48475 | auxiliary contact 1 SDE | LV848475 | Additional SDE fault-trip indication contact - 6 A/240 VAC - MTZ2/MTZ3 - drawout | Yes | Yes |
| 48476 | auxiliary contact 1 SDE low level | LV848476 | Additional SDE fault-trip indication contact - low level - MTZ2/MTZ3 - drawout | Yes | Yes |
| 48477 | 1 EF CONTACT FOR DRAWOUT BREAKER(CLOSED/) | LV848477 | EF combined connected/closed contact - 5 A/240 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48478 | 1 LOW-LEVEL EF CONTACT FOR D/O BREAKER | LV848478 | EF combined connected/closed contact - low level - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48481 | closing coil XF 24 V DC and AC 50 and 60Hz | LV848481 | XF closing voltage release - 24 V AC/DC - for drawout MTZ2/3 | Yes | Yes |

F

[1] For switch disconnector without communication capability only.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|---|----------------|----------------|
| 48482 | closing coil XF 48 V DC and AC 50 and 60Hz | LV848482 | XF closing voltage release - 48 V AC 48/60 V DC - for drawout MTZ2/3 | Yes | Yes |
| 48483 | closing coil XF 100 to 130 V DC and AC 50 and 60 Hz | LV848483 | XF closing voltage release - 100/130 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48484 | closing coil XF 200 to 250 V DC and AC 50 and 60 Hz | LV848484 | XF closing voltage release - 200/250 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48485 | closing coil XF 277 V AC 50 and 60Hz | LV848485 | XF closing voltage release - 277 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48486 | closing coil XF 380 to 480 V AC 50 and 60Hz | LV848486 | XF closing voltage release - 380/480 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48491 | voltage release MX 24 to 30 V DC and AC 50 and 60 Hz | LV848491 | MX opening voltage release - 24 V AC 24/30 V DC - for drawout MTZ2/3 | Yes | Yes |
| 48492 | voltage release MX 48 V DC and AC 50 and 60Hz | LV848492 | MX opening voltage release - 48 V AC 48/60 V DC - for drawout MTZ2/3 | Yes | Yes |
| 48493 | voltage release MX 100 to 130 V DC and AC 50 and 60 Hz | LV848493 | MX opening voltage release - 100/130 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48494 | voltage release MX 200 to 250 V DC and AC 50 and 60 Hz | LV848494 | MX opening voltage release - 200/250 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48495 | voltage release MX 277 V AC 50 and 60Hz | LV848495 | MX opening voltage release - 277 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48496 | voltage release MX 380 to 480 V AC 50 and 60Hz | LV848496 | MX opening voltage release - 380/480 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48498 | TRIP UNIT MicroLogic 2.0 E FOR MasterPact NW DRAWOUT | LV848498 | Control unit MicroLogic 2.0 X - for drawout MasterPact MTZ2/MTZ3 | No | No |
| 48499 | TRIP UNIT MicroLogic 5.0 E FOR MasterPact NW DRAWOUT | LV848499 | Control unit MicroLogic 5.0 X - for drawout MasterPact MTZ2/MTZ3 | No | No |
| 48500 | TRIP UNIT MicroLogic 6.0 E FOR MasterPact NW DRAWOUT | LV848500 | Control unit MicroLogic 6.0 X - for drawout MasterPact MTZ2/MTZ3 | No | No |
| 48501 | instantaneous undervoltage release MN 24 V DC and AC 50 and 60Hz | LV848501 | MN undervoltage release - 24 V AC 24/30 V DC - for drawout MTZ2/3 | Yes | Yes |
| 48502 | instantaneous undervoltage release MN 48 V DC and AC 50 and 60Hz | LV848502 | MN undervoltage release - 48 V AC 48/60 V DC - for drawout MTZ2/3 | Yes | Yes |
| 48503 | instantaneous undervoltage release MN 100 to 130 V DC and AC 50 and 60 Hz | LV848503 | MN undervoltage release - 100/130 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48504 | instantaneous undervoltage release MN 200 to 250 V DC and AC 50 and 60 Hz | LV848504 | MN undervoltage release - 200/250 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48506 | instantaneous undervoltage release MN 380 to 480 V AC 50 and 60Hz | LV848506 | MN undervoltage release - 380/480 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48511 | shunt trip MX 24 V DC and AC 50 and 60Hz | LV848511 | MX 2nd opening voltage release - 24 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48512 | shunt trip MX 48 V DC and AC 50 and 60Hz | LV848512 | MX 2nd opening voltage release - 48 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48513 | shunt trip MX 100 to 130 V DC and AC 50 and 60 Hz | LV848513 | MX 2nd opening voltage release - 100/130 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48514 | shunt trip MX 200 to 250 V DC and AC 50 and 60 Hz | LV848514 | MX 2nd opening voltage release - 200/250 V AC/DC - for drawout MTZ2/3 | Yes | Yes |
| 48515 | shunt trip MX 277 V AC 50 and 60Hz | LV848515 | MX 2nd opening voltage release - 277 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48516 | shunt trip MX 380 to 480 V AC 50 and 60Hz | LV848516 | MX 2nd opening voltage release - 380/480 V AC - for drawout MTZ2/3 | Yes | Yes |
| 48521 | motormechanism MCH 24 to 30 V DC | LV848521 | MCH gear motor - 24/30 V DC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48522 | motormechanism MCH 048/060 VDC/VAC | LV848522 | MCH gear motor - 48 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48523 | motormechanism MCH 100 to 130 V DC | LV848523 | MCH gear motor - 100/130 V DC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48524 | motormechanism MCH 200 to 250 V DC | LV848524 | MCH gear motor - 200/250 V DC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48526 | motormechanism MCH 100 to 130 V AC | LV848526 | MCH gear motor - 100/130 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48527 | motormechanism MCH 200 to 240 V AC | LV848527 | MCH gear motor - 200/240 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48528 | motormechanism MCH 250 to 277 V AC | LV848528 | MCH gear motor - 250/277 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48529 | motormechanism MCH 380 to 415 V AC | LV848529 | MCH gear motor - 380/415 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48530 | motormechanism MCH 440 to 480 V AC | LV848530 | MCH gear motor - 440/480 V AC - for MTZ2/MTZ3 - drawout | Yes | Yes |
| 48533 | VOLTAGE MEASUREMENT INPUT OPTION FOR DRAWOUT BREAKER | LV848533 | PTE voltage measurement input - for MasterPact MTZ2 - drawout | No | No |
| 48534 | BPFE ELECTRICAL CLOSING PUSHBUTTON | LV848534 | BPFE electrical closing pushbutton - 1 NO - for MTZ2/MTZ3 | No | No |
| 48535 | OPERATION COUNTER MECHANICAL 5 DIGIT DISPLAY FOR NW 08 TO 63 | LV848535 | CDM operation counter - mechanical 5 digit display - for MTZ2/MTZ3 | Yes | Yes |
| 48536 | PUSHBUTTON PADLOCKING DEVICE | LV848536 | Pushbutton locking cover - for MasterPact MTZ2/MTZ3 | No | No |
| 48539 | OFF POSITION PADLOCKING | LV848539 | OFF-position locking - padlock - for MTZ2/MTZ3 | No | No |
| 48541 | PROFALUX/RONIS OFF POSITION LOCKING KIT (W/O KEYLOCK) | LV848541SP | OFF-position locking - Profalux/Ronis adaptation kit + padlock - for MTZ2/MTZ3 SPARE PART | No | No |
| 48542 | KIRK OFF POSITION LOCKING KIT (W/O KEYLOCK) | LV848542SP | OFF-position locking - Kirk adaptation kit + padlock - for MTZ2/MTZ3 SPARE PART | No | No |
| 48543 | CASTELL OFF POSITION LOCKING KIT(W/O KEYLOCK) | LV848543SP | OFF-position locking - Castell adaptation kit + padlock - for MTZ2/MTZ3 SPARE PART | No | No |
| 48545 | PROFALUX OFF POSITION LOCKING 1 KEYLOCK | LV848545 | OFF-position locking - 1 Profalux keylock + padlock - for MTZ2/MTZ3 | No | No |
| 48546 | PROFALUX OFF POSITION LOCKING 1 KEYLOCK AND 1IDENT EXTRA KEYLOCK | LV848546 | OFF-position locking - 2 identical Profalux keylocks + padlock - for MTZ2/MTZ3 | No | No |
| 48547 | PROFALUX OFF POSITION LOCKING 2 DIFFERENT KEYLOCKS | LV848547 | OFF-position locking - 2 different Profalux keylocks + padlock - for MTZ2/MTZ3 | No | No |
| 48549 | RONIS OFF POSITION LOCKING 1 KEYLOCK | LV848549 | OFF-position locking - 1 Ronis keylock + padlock - for MTZ2/MTZ3 | No | No |
| 48550 | RONIS OFF POSITION LOCKING 1 KEYLOCK AND 1IDENT EXTRA KEYLOCK | LV848550 | OFF-position locking - 2 identical Ronis keylocks + padlock - for MTZ2/MTZ3 | No | No |

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|----------------|
| 48551 | RONIS OFF POSITION LOCKING 2 DIFFERENT KEYLOCKS | LV848551 | OFF-position locking - 2 different Ronis keylocks + padlock - for MTZ2/MTZ3 | No | No |
| 48554 | AUTOMATIC SPRING DISCHARGE BEFORE BREAKER REMOVAL | LV848554 | Automatic spring discharge before breaker removal | Yes | Yes |
| 48558 | GROUNDING FOR MasterPact NW FIXED | LV848558 | Grounding kit KMT - for MasterPact MTZ2/MTZ3 - fixed | Yes | Yes |
| 48559 | GROUNDING FOR MasterPact NW DRAWOUT | LV848559 | GROUNDING FOR MasterPact NW DRAWOUT | Yes | Yes |
| 48560 | ACTUATOR FOR ADDITIONAL CARRIAGE SWITCHES | LV848560 | Actuator for additional CE/CD/CT position contact - for MTZ2/MTZ3 spare part | Yes | Yes |
| 48564 | PROFALUX/RONIS DISCON. POSITION LOCKING KIT (W/O KEYLOCK) | LV848564SP | Chassis locking - Profalux/Ronis adapt kit w/o keylock - for MTZ2/3 spare part | No | Yes |
| 48565 | KIRK DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV848565SP | Chassis locking - Kirk adaptation kit w/o keylock - for MTZ2/ MTZ3 spare part | No | Yes |
| 48566 | CASTELL DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV848566SP | Chassis locking - Castell adaptation kit w/o keylock - for MTZ2/MTZ3 spare part | No | Yes |
| 48568 | PROFALUX DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV848568 | Chassis locking - 1 Profalux keylock 2 keys + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48569 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV848569 | Chassis locking - 2 Profalux locks 1 key + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48570 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV848570 | Chassis locking - 2 Profalux locks 2 diff keys + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48572 | RONIS DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV848572 | Chassis locking - 1 Ronis keylock 2 keys + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48573 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV848573 | Chassis locking - 2 Ronis locks 1 key + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48574 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV848574 | Chassis locking - 2 Ronis locks 2 diff keys + adaptation kit - for MTZ2/MTZ3 | No | Yes |
| 48579 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) | LV848579 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) SPARE PART | Yes | Yes |
| 48580 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) | LV848580 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) SPARE PART | Yes | Yes |
| 48582 | RACKING INTERLOCK (LOCKOUT WITH DOOR OPEN) | LV848582 | Racking interlock VPOC (crank & open door) - for MTZ2/ MTZ3 - drawout | Yes | Yes |
| 48585 | RACKING INTERLOCK BETWEEN CRANK AND OFF PUSHBUTTON | LV848585 | Racking interlock between crank and OFF pushbutton - for MTZ2/MTZ3 | Yes | Yes |
| 48591 | 1 SHUTTER LOCKING BLOCK | LV848591SP | Shutter locking block - for MasterPact MTZ2/MTZ3 - spare part | Yes | Yes |
| 48592 | SHUTTER POSITION INDICATION AND LOCKING < 4000A | LV848592 | SHUTTER POSITION INDICATION AND LOCKING < 4000A | Yes | Yes |
| 48593 | SHUTTER POSITION INDICATION AND LOCKING 4000B/6300A 3P | LV848593 | SHUTTER POSITION INDICATION AND LOCKING 4000B/6300A 3P | Yes | Yes |
| 48594 | SHUTTER POSITION INDICATION AND LOCKING 4000B/6300A 4P | LV848594 | SHUTTER POSITION INDICATION AND LOCKING 4000B/6300A 4P | Yes | Yes |
| 48595 | AUXILIARY TERMINAL SHIELD FOR NW800/4000A 3P | LV848595 | AUXILIARY TERMINAL SHIELD FOR MTZ2 800/4000A 3P | Yes | Yes |
| 48596 | AUXILIARY TERMINAL SHIELD FOR NW800/4000A 4P | LV848596 | AUXILIARY TERMINAL SHIELD FOR NW800/4000A 4P | Yes | Yes |
| 48597 | AUXILIARY TERMINAL SHIELD FOR NW4000B/6300A 3P | LV848597 | AUXILIARY TERMINAL SHIELD FOR NW4000B/6300A 3P | Yes | Yes |
| 48598 | AUXILIARY TERMINAL SHIELD FOR NW4000B/6300A 4P | LV848598 | AUXILIARY TERMINAL SHIELD FOR NW4000B/6300A 4P | Yes | Yes |
| 48599 | 3 INTERPHASE BARRIERS FOR FIXED BREAKER | LV848599SP | 3 interphase barriers - for MTZ2/3 rear connection - 3P/4P fixed - spare part | Yes | Yes |
| 48600 | 3 INTERPHASE BARRIERS FOR D/O BREAKER | LV848600SP | 3 interphase barriers - for MTZ2/3 rear connection - 3P/4P drawout - spare part | Yes | Yes |
| 48601 | ESCUTCHEON FOR FIXED BREAKER | LV848601SP | Escutcheon - for MasterPact MTZ2/MTZ3 - fixed spare part | Yes | Yes |
| 48603 | ESCUTCHEON FOR DRAWOUT BREAKER | LV848603SP | Escutcheon - for MasterPact MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 48604 | TRANSPARENT COVER FOR ESCUTCHEON ON DRAWOUT BREAKER | LV848604SP | IP54 transparent cover - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48605 | ESCUTCHEON BLANKING PLATE | LV848605SP | Escutcheon blanking plate - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48608 | cable interlocking for fixed or drawout MasterPact NW | LV848608SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48609 | cable interlocking for fixed or drawout MasterPact NW | LV848609SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48610 | cable interlocking for fixed or drawout MasterPact NW | LV848610SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48614 | CABLE-TYPE DOOR INTERLOCKING FOR FIXED OR DRAWOUT BREAKER | LV848614SP | Cable - type door interlock - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48725 | basic frame MasterPact NW08H10 800 A 3P draw out | LV848725 | Circuit breaker MasterPact MTZ2 08H10 - 800 A - 3P drawout - w/o MicroLogic | No | No |
| 48726 | basic frame MasterPact NW10H10 1000 A 3P draw out | LV848726 | Circuit breaker MasterPact MTZ2 10H10 - 1000 A - 3P drawout - w/o MicroLogic | No | No |
| 48727 | basic frame MasterPact NW12H10 1250 A 3P draw out | LV848727 | Circuit breaker MasterPact MTZ2 12H10 - 1250 A - 3P drawout - w/o MicroLogic | No | No |
| 48728 | basic frame MasterPact NW16H10 1600 A 3P draw out | LV848728 | Circuit breaker MasterPact MTZ2 16H10 - 1600 A - 3P drawout - w/o MicroLogic | No | No |
| 48729 | basic frame MasterPact NW20H10 2000 A 3P draw out | LV848729 | Circuit breaker MasterPact MTZ2 20H10 - 2000 A - 3P drawout - w/o MicroLogic | No | No |
| 48730 | basic frame MasterPact NW25H10 2500 A 3P draw out | LV848730 | Circuit breaker MasterPact MTZ2 25H10 - 2500 A - 3P drawout - w/o MicroLogic | No | No |

F

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|---|----------------|----------------|
| 48731 | basic frame MasterPact NW32H10 3200 A 3P draw out | LV848731 | Circuit breaker MasterPact MTZ2 32H10 - 3200 A - 3P | No | No |
| 48732 | basic frame MasterPact NW40H10 4000 A 3P draw out | LV848732 | Circuit breaker MasterPact MTZ2 40H10 - 4000 A - 3P | No | No |
| 48735 | basic frame MasterPact NW08H10 800 A 4P draw out | LV848735 | Circuit breaker MasterPact MTZ2 08H10 - 800 A - 4P | No | No |
| 48736 | basic frame MasterPact NW10H10 1000 A 4P draw out | LV848736 | Circuit breaker MasterPact MTZ2 10H10 - 1000 A - 4P | No | No |
| 48737 | basic frame MasterPact NW12H10 1250 A 4P draw out | LV848737 | Circuit breaker MasterPact MTZ2 12H10 - 1250 A - 4P | No | No |
| 48738 | basic frame MasterPact NW16H10 1600 A 4P draw out | LV848738 | Circuit breaker MasterPact MTZ2 16H10 - 1600 A - 4P | No | No |
| 48739 | basic frame MasterPact NW20H10 2000 A 4P draw out | LV848739 | Circuit breaker MasterPact MTZ2 20H10 - 2000 A - 4P | No | No |
| 48740 | basic frame MasterPact NW25H10 2500 A 4P draw out | LV848740 | Circuit breaker MasterPact MTZ2 25H10 - 2500 A - 4P | No | No |
| 48741 | basic frame MasterPact NW32H10 3200 A 4P draw out | LV848741 | Circuit breaker MasterPact MTZ2 32H10 - 3200 A - 4P | No | No |
| 48742 | basic frame MasterPact NW40H10 4000 A 4P draw out | LV848742 | Circuit breaker MasterPact MTZ2 40H10 - 4000 A - 4P | No | No |
| 48745 | switch disconnector MasterPact NW08HA10 3P 800 A 1150 V draw out | LV848745 | Switch-disconnector MasterPact MTZ2 08 HA 10 - 800 A - 3P drawout | Yes | Yes [1] |
| 48746 | switch disconnector MasterPact NW10HA10 3P 1000 A 1150 V draw out | LV848746 | Switch-disconnector MasterPact MTZ2 10 HA 10 - 1000 A - 3P drawout | Yes | Yes [1] |
| 48747 | switch disconnector MasterPact NW12HA10 3P 1250 A 1150 V draw out | LV848747 | Switch-disconnector MasterPact MTZ2 12 HA 10 - 1250 A - 3P drawout | Yes | Yes [1] |
| 48748 | switch disconnector MasterPact NW16HA10 3P 1600 A 1150 V draw out | LV848748 | Switch-disconnector MasterPact MTZ2 16 HA 10 - 1600 A - 3P drawout | Yes | Yes [1] |
| 48749 | switch disconnector MasterPact NW20HA10 3P 2000 A 1150 V draw out | LV848749 | Switch-disconnector MasterPact MTZ2 20 HA 10 - 2000 A - 3P drawout | Yes | Yes [1] |
| 48750 | switch disconnector MasterPact NW25HA10 3P 2500 A 1150 V draw out | LV848750 | Switch-disconnector MasterPact MTZ2 25 HA 10 - 2500 A - 3P drawout | Yes | Yes [1] |
| 48751 | switch disconnector MasterPact NW32HA10 3P 3200 A 1150 V draw out | LV848751 | Switch-disconnector MasterPact MTZ2 32 HA 10 - 3200 A - 3P drawout | Yes | Yes [1] |
| 48752 | switch disconnector MasterPact NW40HA10 3P 4000 A 1150 V draw out | LV848752 | Switch-disconnector MasterPact MTZ2 40 HA 10 - 4000 A - 3P drawout | Yes | Yes [1] |
| 48755 | switch disconnector MasterPact NW08HA10 4P 800 A 1150 V draw out | LV848755 | Switch-disconnector MasterPact MTZ2 08 HA 10 - 800 A - 4P drawout | Yes | Yes [1] |
| 48756 | switch disconnector MasterPact NW10HA10 4P 1000 A 1150 V draw out | LV848756 | Switch-disconnector MasterPact MTZ2 10 HA 10 - 1000 A - 4P drawout | Yes | Yes [1] |
| 48757 | switch disconnector MasterPact NW12HA10 4P 1250 A 1150 V draw out | LV848757 | Switch-disconnector MasterPact MTZ2 12 HA 10 - 1250 A - 4P drawout | Yes | Yes [1] |
| 48758 | switch disconnector MasterPact NW16HA10 4P 1600 A 1150 V draw out | LV848758 | Switch-disconnector MasterPact MTZ2 16 HA 10 - 1600 A - 4P drawout | Yes | Yes [1] |
| 48759 | switch disconnector MasterPact NW20HA10 4P 2000 A 1150 V draw out | LV848759 | Switch-disconnector MasterPact MTZ2 20 HA 10 - 2000 A - 4P drawout | Yes | Yes [1] |
| 48760 | switch disconnector MasterPact NW25HA10 4P 2500 A 1150 V draw out | LV848760 | Switch-disconnector MasterPact MTZ2 25 HA 10 - 2500 A - 4P drawout | Yes | Yes [1] |
| 48761 | switch disconnector MasterPact NW32HA10 4P 3200 A 1150 V draw out | LV848761 | Switch-disconnector MasterPact MTZ2 32 HA 10 - 3200 A - 4P drawout | Yes | Yes [1] |
| 48762 | switch disconnector MasterPact NW40HA10 4P 3200 A 1150 V draw out | LV848762 | Switch-disconnector MasterPact MTZ2 40 HA 10 - 3200 A - 4P drawout | Yes | Yes [1] |
| 48891 | MDGF SUMMING MODULE | LV848891SP | MDGF Summing module - for MasterPact MTZ2/MTZ3 - fixed/drawout spare part | No | No |
| 54440 | CIRCUIT BREAKER EXT POWER SUPPLY 24/30VD | 54440 | CIRCUIT BREAKER EXT POWER SUPPLY 24/30VD | Yes | Yes |
| 54441 | CIRCUIT BREAKER EXT POWER SUPPLY 48/60CD | 54441 | CIRCUIT BREAKER EXT POWER SUPPLY 48/60CD | Yes | Yes |
| 54442 | CIRCUIT BREAKER EXT POWER SUPPLY 100/125VDC | 54442 | CIRCUIT BREAKER EXT POWER SUPPLY 100/125VDC | Yes | Yes |
| 54443 | POWER SUPPLY 110 130 VAC | 54443 | POWER SUPPLY 110 130 VAC | Yes | Yes |
| 54444 | POWER SUPPLY 200 240 VAC | LV454444 | POWER SUPPLY 200 240 VAC | Yes | Yes |
| 54445 | POWER SUPPLY 380 415 VAC | 54445 | POWER SUPPLY 380 415 VAC | No | Yes |
| 54446 | CIRCUIT BREAKER 24V BATTERY | | | No | N/A |
| 64909 | PROFALUX DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV864909SP | Chassis locking - 1 Profalux lock 2 keys + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 65307 | MicroLogic 7.0 A FOR DRAWOUT BREAKER MasterPact NT | LV865307 | Control unit MicroLogic 7.0 X - for drawout MasterPact MTZ1 | No | No |
| NA | | LV836700 | COIL MN DIAG 24/30 V DC, 24 V AC MTZ fixed | N/A | No |
| NA | | LV836701 | COIL MN DIAG 48/60 V DC, 48 V AC MTZ fixed | N/A | No |
| NA | | LV836702 | COIL MN DIAG 100/130 V AC/DC MTZ fixed | N/A | No |
| NA | | LV836703 | COIL MN DIAG 200/250 V AC/DC MTZ fixed | N/A | No |
| NA | | LV836704 | COIL MN DIAG 380/480 V AC MTZ fixed | N/A | No |
| NA | | LV836705 | COIL MN DIAG 24/30 V DC, 24 V AC MTZ2 MTZ3 drawout | N/A | No |
| NA | | LV836706 | COIL MN DIAG 48/60 V DC, 48 V AC MTZ2 MTZ3 drawout | N/A | No |
| NA | | LV836707 | COIL MN DIAG 100/130 V AC/DC MTZ2 MTZ3 drawout | N/A | No |
| NA | | LV836708 | COIL MN DIAG 200/250 V AC/DC MTZ2 MTZ3 drawout | N/A | No |
| NA | | LV836709 | COIL MN DIAG 380/480 V AC MTZ2 MTZ3 drawout | N/A | No |
| NA | | LV836710 | COIL MN DIAG 24/30 V DC, 24 V AC MTZ1 drawout | N/A | No |
| NA | | LV836711 | COIL MN DIAG 48/60 V DC, 48 V AC MTZ1 drawout | N/A | No |
| NA | | LV836712 | COIL MN DIAG 100/130 V AC/DC MTZ1 drawout | N/A | No |
| NA | | LV836713 | COIL MN DIAG 200/250 V AC/DC MTZ1 drawout | N/A | No |
| NA | | LV836714 | COIL MN DIAG 380/480 V AC MTZ1 drawout | N/A | No |

[1] For switch disconnector without communication capability only.

[2] Need to change the cabling on the MDGF.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|-------------|------------------------------|---|----------------|----------------|
| NA | | LV846436 | Circuit breaker MasterPact MTZ1 06H3 - 630 A - 3P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846437 | Circuit breaker MasterPact MTZ1 08H3 - 800 A - 3P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846438 | Circuit breaker MasterPact MTZ1 10H3 - 1000 A - 3P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846439 | Circuit breaker MasterPact MTZ1 12H3 - 1250 A - 3P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846440 | Circuit breaker MasterPact MTZ1 16H3 - 1600 A - 3P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846443 | Circuit breaker MasterPact MTZ1 06H3 - 630 A - 4P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846444 | Circuit breaker MasterPact MTZ1 08H3 - 800 A - 4P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846445 | Circuit breaker MasterPact MTZ1 10H3 - 1000 A - 4P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846446 | Circuit breaker MasterPact MTZ1 12H3 - 1250 A - 4P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846447 | Circuit breaker MasterPact MTZ1 16H3 - 1600 A - 4P fixed - w/o MicroLogic | N/A | N/A |
| NA | | LV846450 | Circuit breaker MasterPact MTZ1 06H3 - 630 A - 3P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846451 | Circuit breaker MasterPact MTZ1 08H3 - 800 A - 3P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846452 | Circuit breaker MasterPact MTZ1 10H3 - 1000 A - 3P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846453 | Circuit breaker MasterPact MTZ1 12H3 - 1250 A - 3P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846454 | Circuit breaker MasterPact MTZ1 16H3 - 1600 A - 3P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846459 | Circuit breaker MasterPact MTZ1 10H3 - 1000 A - 4P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846460 | Circuit breaker MasterPact MTZ1 12H3 - 1250 A - 4P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV846461 | Circuit breaker MasterPact MTZ1 16H3 - 1600 A - 4P drawout - w/o MicroLogic | N/A | N/A |
| NA | | LV848892 | Restraint Interface Module (RIM) 120Vac | N/A | Yes |
| NA | | LV850002 | Digital module "Energy per Phase" for MicroLogic X | N/A | No |
| NA | | LV850003 | Digital module "Waveform Capture on Trip Event" for MicroLogic X | N/A | No |
| NA | | LV850004 | Digital Module "Power Restoration Assistant" for MicroLogic X | N/A | No |
| NA | | LV850005 | Digital Module "MasterPact Operation Assistant" for MicroLogic X | N/A | No |
| | | LV850006 | Digital Module "Individual harmonics analysis" for MicroLogic X | N/A | No |
| NA | | LV850007 | Digital Module "ANSI 51N/51G - Ground fault Alarm" for MicroLogic X | N/A | No |
| NA | | LV850009 | Digital Module "ERMS - Energy Reducing Maintenance Settings" for MicroLogic X | N/A | No |
| NA | | LV850011 | Digital Module "ANSI 32P - Reverse active power protection" for MicroLogic X | N/A | No |
| NA | | LV850012 | Digital Module "ANSI 27/59 - Under/Over voltage protection" for MicroLogic X | N/A | No |
| NA | | LV850013 | Digital Module "ANSI 81 - Under/Over frequency protection" for MicroLogic X | N/A | No |
| | | LV850015 | Digital Module "ANSI 67 - Directional overcurrent" for MicroLogic X | N/A | No |
| | | LV850018 | Digital Module "PowerTag for MasterPact MTZ" for MicroLogic X | N/A | No |
| | | LV850037 | Digital Module "ANSI 51 - IDMTL overcurrent protection" for MicroLogic X | N/A | No |
| NA | | LV850045 | Digital Module "Modbus legacy dataset" for MicroLogic X | N/A | No |
| NA | | LV850046 | Digital Module "IEC 61850 data model" for MicroLogic X | N/A | No |
| NA | | LV850055SP | Mobile Power Pack - for MicroLogic X spare part | N/A | No |
| NA | | LV850056 | Isolation module - for MX1/XF communicating coils | N/A | No |
| NA | | LV850057 | BPFE delayed electrical closing pushbutton - 1 NO - for MTZ1 | N/A | No |
| NA | | LV850058 | BPFE delayed electrical closing pushbutton - 1 NO - for MTZ2/MTZ3 | N/A | No |
| NA | | LV850060 | VPS voltage power supply module - for MicroLogic | N/A | No |
| NA | | LV850061 | ULP port module for fixed MTZ | N/A | Yes |
| NA | | LV850063 | ULP port module - for MasterPact MTZ1 - fixed | N/A | No |
| NA | | LV850064 | ULP port module for drawout MTZ1 | N/A | Yes |
| NA | | LV836388 | ULP port wires for MTZ1 | N/A | No |
| NA | | LV850067SP | USB cable (miniUSB/USB) - For MicroLogic X - spare part | N/A | No |
| NA | | LV851100 | EIFE embedded Ethernet interface with accessories - for MTZ1 | N/A | No |
| NA | | LV851200 | EIFE embedded Ethernet interface with accessories - for MTZ2/MTZ3 | N/A | No |

F

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|----------------|
| 33033 | COIL MX COM 024/030 VAC VCD PR APP FIXE | LV833033SP | MX/XF com voltage release - 24 V AC 24/30 V DC - for MTZ - spare part | No | No |
| 33034 | COIL MX COM 048/060 VAC/VDC FOR FIXED BREAKER | LV833034SP | MX/XF com voltage release - 48/60 V AC/DC - for MTZ - spare part | No | No |
| 33035 | COIL MX COM 100/130 VAC/VCD FOR FIXED BREAKER | LV833035SP | MX/XF com voltage release - 100/130 V AC/DC - for MTZ - spare part | No | No |
| 33036 | COIL MX COM 200/250 VAC/VCD FOR FIXED BREAKER | LV833036SP | MX/XF com voltage release - 200/250 V AC/DC - for MTZ - spare part | No | No |
| 33037 | COIL MX COM 240/277 VAC FOR FIXED BREAKER | LV833037SP | MX/XF com voltage release - 240/277 V AC - for MTZ - spare part | No | No |
| 33038 | COIL MX COM 380/480 VAC FOR FIXED BREAKER | LV833038SP | MX/XF com voltage release - 380/480 V AC - for MTZ - spare part | No | No |
| 33098 | 3-WIRE AUXILIARY TERMINAL BLOCK FOR CHASSIS MOUNT | [2] | 3 wires terminal block - 1 part - for MasterPact MTZ1 - drawout - spare part | Yes | Yes |
| 33099 | 6-WIRE AUXILIARY TERMINAL BLOCK FOR CHASSIS MOUNT | LV833099SP | 6 wires terminal block - 1 part - for MasterPact MTZ1 - drawout - spare part | Yes | Yes |
| 33170 | 1 CARRIAGE SWITCH CONNECTED / DISCONNECTED / TEST POSITION 6A/ 240 VAC | LV833118SP LV833170SP | Wiring kit for diag & com coil - for MTZ1 - spare part CE/CD/CT position contact - 6 A/240 VAC - for MTZ - drawout spare part | N/A Yes | No Yes |
| 33171 | 1 LOW-LEVEL CARRIAGE SWICH (CONNECTED/DI) | LV833171SP | CE/CD/CT position contact - low level - for MTZ - drawout spare part | Yes | Yes |
| 33172 | DOOR INTERLOCK | LV833172SP | Door interlock right or left-hand side VPEC - for MTZ1 - drawout SPARE PART | Yes | Yes |
| 33173 | UNIDENTIFIED PROFALUX LOCK WITH 2 KEYS | LV833173SP | 1 Profalux keylock with 2 keys - not-identified combination spare part | Yes | Yes |
| 33174 | 1 IDENTIFIED PROFALUX LOCK 215470 WITH 2 | LV833174SP | 1 Profalux keylock with 2 keys - identified 215470 combination SPARE PART | Yes | Yes |
| 33175 | 1 IDENTIFIED PROFALUX LOCK 215471 WITH 2 | LV833175SP | 1 Profalux keylock with 2 keys - identified 215471 combination spare part | Yes | Yes |
| 33176 | GEAR MOTOR 100/130 VAC | LV833176SP | MCH gear motor - 100/130 V AC - for MTZ1 spare part | Yes | Yes |
| 33177 | GEAR MOTOR 200/240 VAC | LV833177SP | MCH gear motor - 200/240 V AC - for MTZ1 spare part | Yes | Yes |
| 33179 | GEAR MOTOR 277 TO 415 VAC | LV833179SP | MCH gear motor - 277/415 V AC - for MTZ1 spare part | Yes | Yes |
| 33185 | GEAR MOTOR 024/030 VDC | LV833185SP | MCH gear motor - 24/30 V DC - for MTZ1 spare part | Yes | Yes |
| 33186 | GEAR MOTOR 048/060 VDC | LV833186SP | MCH gear motor - 48/60 V DC - for MTZ1 spare part | Yes | Yes |
| 33187 | GEAR MOTOR 100/130 VDC | LV833187SP | MCH gear motor - 100/130 V DC - for MTZ1 spare part | Yes | Yes |
| 33188 | GEAR MOTOR 200/250 VDC | LV833188SP | MCH gear motor - 200/250 V DC - for MTZ1 spare part | Yes | Yes |
| 33189 | 1 UNIDENTIFIED RONIS LOCK WITH 2 KEYS | LV833189SP | 1 Ronis keylock with 2 keys - not-identified combination spare part | Yes | Yes |
| 33190 | 1 IDENTIFIED RONIS LOCK EL24135 WITH 2 K | LV833190SP | 1 Ronis keylock with 2 keys - identified EL24135 combination spare part | Yes | Yes |
| 33191 | 1 IDENTIFIED RONIS LOCK EL24153 WITH 2 K | LV833191SP | 1 Ronis keylock with 2 keys - identified EL24153 combination spare part | Yes | Yes |
| 33192 | 1 IDENTIFIED RONIS LOCK EL24315 WITH 2 K | LV833192SP | 1 Ronis keylock with 2 keys - identified EL24315 combination spare part | Yes | Yes |
| 33193 | 440/480V RESISTOR FOR MCH | LV833193SP | Resistor for MCH - 440/480V - for MTZ1 spare part | Yes | Yes |
| 33200 | CABLE-TYPE INTERLOCKING PLATE FOR FIXED BREAKER | LV833200SP | Cable interlocking adaptation fixture - for MTZ1 - fixed spare part | Yes | Yes |
| 33201 | CABLE-TYPE INTERLOCKING PLATE FOR D/O BREAKER | LV833201SP | Cable interlocking adaptation fixture - for MTZ1 - drawout spare part | Yes | Yes |
| 33203 | 2 ROD-TYPE INTERLOCKING PLATES FOR FIXED BREAKERS | LV833203SP | Rod interlocking adaptation fixture - for MTZ1 - fixed | Yes | Yes |
| 33204 | 2 ROD-TYPE INTERLOCKING PLATES FOR D/O BREAKERS | LV833204SP | Rod interlocking adaptation fixture - for MTZ1 - drawout | Yes | Yes |
| 33209 | 1 SET OF 2 INTERLOCK CABLES | LV833209SP | 2 Cables for interlocking any combination - for MTZ1/MTZ2/ MTZ3 - spare part | Yes | Yes |
| 33210 | 1 SET OF 2 INTERLOCK RODS | LV833210SP | 2 rods for interlocking - spare part | Yes | Yes |
| 33573 | window sensor for residual current protection 280 x 115 mm | LV833573SP | Rectangular sensor for earth- leakage protection - 280 x 115 mm spare part | Yes | Yes |
| 33574 | window sensor for residual current protection 470 x 160 mm | LV833574SP | Rectangular sensor for earth- leakage protection - 470 x 160 mm spare part | Yes | Yes |
| 33576 | CT neutral or ground fault protection for NT 06 to 16, NS 630b to 1600 | LV833576SP | CT neutral or ground fault protection - 400/1600A - for MTZ1 spare part | Yes [1] | No |
| 33579 | CT source ground return protection for NS, NT, NW | LV833579SP | CT source ground return protection - for Masterpact MTZ2/ MTZ3 spare part | Yes | Yes |
| 33584 | SPARE PART 3P REAR CONNECTION KIT FOR FIXED NS NT | LV833584SP | Rear connection kit - vertical or horizontal - MasterPact MTZ1 06-16 - 3P fixed spare part | Yes | Yes |
| 33585 | SPARE PARTS 4P REAR CONNECTION KIT FOR FIXED NS NT | LV833585SP | Rear connection kit - vertical or horizontal - MasterPact MTZ1 06-16 - 4P fixed spare part | Yes | Yes |
| 33586 | SPARE PARTS 3P REAR CONNECTION KIT FOR D/O NS NT | LV833586SP | Horizontal/vertical rear connection - for drawout MTZ1 06-16 - 3P drawout spare part | Yes | Yes |
| 33587 | SPARE PARTS 4P REAR CONNECTION KIT FOR D/O NS NT | LV833587SP | Horizontal/vertical rear connection - for MasterPact MTZ1 06-16 - 4P drawout spare part | Yes | Yes |
| 33588 | SPARE PARTS 3P FRONT CONNECTIONKIT FOR D/O NS NT | LV833588SP | Front top or bottom connection - for drawout MTZ1 06-16 - 3P drawout spare part | Yes | Yes |
| 33589 | SPARE PARTS 4P FRONT CONNECTIONKIT FOR D/O NS NT | LV833589SP | Front top or bottom connection - for drawout MTZ1 06-16 - 4P drawout spare part | Yes | Yes |
| 33593 | SPARE BATTERY | LV833593SP | spare battery - for MicroLogic | Yes | Yes |

[1] Need to disconnect the shield at ENCT level.

[2] Must be ordered with LV833118SP for MTZ1 or LV847904SP for MTZ2/MTZ3, in the case of diag & com coils.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|---|----------------|----------------|
| 33622 | 95 mm pitch spreader set flat connection for NT 06 to 16 3P spare part | LV833622SP | 95 mm pitch spreader set flat connection - for MTZ1 - 3P - spare part | Yes | Yes |
| 33623 | 95 mm pitch spreader set flat connection for NT 06 to 16 4P spare part | LV833623SP | 95 mm pitch spreader set flat connection - for MTZ1 - 4P - spare part | Yes | Yes |
| 33642 | KIT 3P VERTICAL CONNECTION ADAPTERS | LV833642SP | 3P vertical connection adapters - spare part | Yes | Yes |
| 33643 | KIT 4P VERTICAL CONNECTION ADAPTERS | LV833643SP | 4P vertical connection adapters - spare part | Yes | Yes |
| 33644 | 3P CABLE LUG ADAPTER KIT | LV833644SP | Cable lug adapters - set of 3 - for MasterPact MTZ1 - 3P Spare part | Yes | Yes |
| 33645 | 4P CABLE LUG ADAPTER KIT | LV833645SP | Cable lug adapters - set of 4 - for MasterPact MTZ1 - 4P spare part | Yes | Yes |
| 33646 | 3 INTERPHASE BARRIERS FOR FRONT CONNECTIONS | LV833648SP | 3 interph barriers - for MTZ1/NS630b..1600 rear con - 3P/4P fixed - spare part | Yes | Yes |
| 33659 | COIL MX 024/030 VAC/VCD FOR FIXE BREAKER | LV833659SP | MX or XF voltage release - 24 V AC 24/30 V DC - for MTZ - spare part | Yes | Yes |
| 33660 | COIL MX 048/060 VAC/VCD FOR FIXE BREAKER | LV833660SP | MX or XF voltage release - 48 V AC 48/60 V DC - for MTZ - spare part | Yes | Yes |
| 33661 | COIL MX 100/130 VAC/VCD FOR FIXE BREAKER | LV833661SP | MX or XF voltage release - 100/130 V DC/AC - for MTZ - spare part | Yes | Yes |
| 33662 | COIL MX 200/250 VAC/VCD FOR FIXE BREAKER | LV833662SP | MX or XF voltage release - 200/250 V DC/AC - for MTZ - spare part | Yes | Yes |
| 33663 | COIL MX 240/277 VAC FOR FIXE BREAKER | LV833663SP | MX or XF voltage release - 277 V AC - for MTZ - spare part | Yes | Yes |
| 33664 | COIL MX 380/480 VAC FOR FIXE BREAKER | LV833664SP | MX or XF voltage release - 380/480 V AC - for MTZ - spare part | Yes | Yes |
| 33668 | COIL MN 024/030 VAC/VCD FOR FIXE BREAKER | LV833668SP | MN undervoltage release - 24 V AC 24/30 V DC - for MTZ - spare part | Yes | Yes |
| 33669 | COIL MN 048/060 VAC/VCD FOR FIXE BREAKER | LV833669SP | MN undervoltage release - 48 V AC 48/60 V DC - for MTZ - spare part | Yes | Yes |
| 33670 | COIL MN 100/130 VAC/VCD FOR FIXE BREAKER | LV833670SP | MN undervoltage release - 100/130 V AC/DC - for MTZ - spare part | Yes | Yes |
| 33671 | undervoltage trip MN 200 to 250 V DC andAC 50 and60 Hz | LV833671SP | MN undervoltage release - 200/250 V AC/DC - for MTZ - spare part | Yes | Yes |
| 33673 | MN 380/480 VAC | LV833673SP | MN undervoltage release - 380/480 V AC - for MTZ - spare part | Yes | Yes |
| 33680 | ADJUSTABLE DELAY UNIT FOR MN 048/060 VAC/VDC | LV833680SP | Adjustable delay unit - for MN undervoltage release - 48/60 V AC/DC spare part | Yes | Yes |
| 33681 | ADJUSTABLE DELAY UNIT FOR MN 100/130 VAC/VDC | LV833681SP | Adjustable delay unit - for MN undervoltage release - 100/130 V AC/DC spare part | Yes | Yes |
| 33682 | ADJUSTABLE DELAY UNIT FOR MN 200/250 VAC/VDC | LV833682SP | Adjustable delay unit - for MN undervoltage release - 200/250 V AC/DC spare part | Yes | Yes |
| 33683 | ADJUSTABLE DELAY UNIT FOR MN 380/480 VAC | LV833683SP | Adjustable delay unit - for MN undervoltage release - 380/480 VAC spare part | Yes | Yes |
| 33684 | NON-ADJUSTABLE DELAY UNIT FOR MN 100/130 VAC/VDC | LV833684SP | Non-adjust delay unit - for MN undervoltage release - 100/130 V AC/DC spare part | Yes | Yes |
| 33685 | NON-ADJUSTABLE DELAY UNIT FOR MN 200/250 VAC/VDC | LV833685SP | Non-adjust delay unit - for MN undervoltage release - 200/250 V AC/DC spare part | Yes | Yes |
| 33718 | ESCUTCHEON FOR FIXED ELEC. OP. BREAKER | LV833718SP | Escutcheon - for fixed electrical operated MTZ1 breaker spare part | Yes | Yes |
| 33763 | AUXILIARY TERMINAL SHIELD 3P | LV833763SP | Auxiliary terminal shield - for MasterPact MTZ1 - 3P spare part | Yes | Yes |
| 33764 | AUXILIARY TERMINAL SHIELD 4P | LV833764SP | Auxiliary terminal shield - for MasterPact MTZ1 - 4P spare part | Yes | Yes |
| 33765 | SAFETY SHUTTERS 3P | LV833765SP | Safety shutters - for MasterPact MTZ1 - 3P spare part | Yes | Yes |
| 33766 | SAFETY SHUTTERS 4P | LV833766SP | Safety shutters - for MasterPact MTZ1 - 4P spare part | Yes | Yes |
| 33767 | BREAKER MISMATCH PROTECTION | LV833767SP | VDC breaker mismatch protection - spare part | Yes | Yes |
| 33768 | INTERPHASE BARRIER FOR CHASSIS | LV833768SP | 3 interph barriers - for MTZ1/NS630b..1600 rear con - 3P/4P drawout - spare part | Yes | Yes |
| 33769 | PROFALUX DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833769SP | Chassis locking - Profalux/Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33770 | RONIS DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833769SP | Chassis locking - Profalux/Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33771 | CASTELL DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833771SP | Chassis locking - Castell adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33772 | KIRK DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV833772SP | Chassis locking - Kirk adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 33786 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) | LV833786 | Door interlock right-hand side VPEC - for MTZ1 - drawout | Yes | Yes |
| 33787 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) | LV833787 | Door interlock left-hand side VPEC - for MTZ1 - drawout | Yes | Yes |
| 33788 | RACKING INTERLOCK (LOCKOUT WITH DOOR OPEN) | LV833788SP | Racking interlock VPOC (crank & open door) - for MTZ1 - drawout spare part | Yes | Yes |
| 33857 | ESCUTCHEON FOR MANUAL OR ELEC. OP. DRAWOUT BREAKER | LV833857SP | Door escutcheon for fixed mounting - for MasterPact MTZ1 spare part | Yes | Yes |
| 33858 | ESCUTCHEON BLANKING PLATE FOR MANUAL OR ELEC. OP. BREAKER | LV833858SP | Door escutcheon blanking plate - for MasterPact MTZ1 spare part | Yes | Yes |
| 33859 | TRANSPARENT COVER FOR ESCUTCHEON ON DRAWOUT BREAKER | LV833859SP | IP54 transparent cover - for MasterPact MTZ1 spare part | Yes | Yes |
| 33895 | OPERATION COUNTER MECHANICAL 5 DIGIT DISPLAY FOR NT 06 TO 16 | LV833895SP | CDM operation counter - mechanical 5 digit display - for MTZ1 spare part | Yes | Yes |

G

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|----------------|
| 33897 | PUSHBUTTON PADLOCKING DEVICE | LV833897SP | Pushbutton locking cover - for MasterPact MTZ1 spare part | No | No |
| 33912 | rod interlocking for fixed MasterPact NT06 to 16 | LV833203SP | Rod interlocking adaptation fixture - for MTZ1 - fixed | Yes | Yes |
| 33913 | rod interlocking for drawout ComPact NS630b to 1600 | LV833204SP | Rod interlocking adaptation fixture - for MTZ1 - drawout | Yes | Yes |
| 33920 | CABLE-TYPE DOOR INTERLOCK FOR FIXED BREAKER | LV833920SP | Cable-type door interlock - for MasterPact MTZ1 - fixed spare part | Yes | Yes |
| 33921 | CABLE-TYPE DOOR INTERLOCK FOR DRAWOUT BREAKER | LV833921SP | Cable-type door interlock - for MasterPact MTZ1 - drawout spare part | Yes | Yes |
| 34035 | CT neutral or ground fault protection for NW 08 to 20 | LV834035SP | CT neutral or ground fault protection - 400/2000A - for MTZ2 spare part | Yes [1] | No |
| 34036 | CT neutral or ground fault protection 1000/4000A FOR MasterPact NW | LV834036SP | CT neutral or ground fault protection - 1000/4000A - for MTZ2/MTZ3 spare part | Yes [1] | No |
| N/A | | LV836668SP | MN Diagnostic undervoltage release - 24 V AC 24/30 V DC - for MTZ - spare part | N/A | No |
| N/A | | LV836669SP | MN Diagnostic undervoltage release - 48 V AC 48/60 V DC - for MTZ - spare part | N/A | No |
| N/A | | LV836670SP | MN Diagnostic undervoltage release - 100/130 V AC/DC - for MTZ - spare part | N/A | No |
| N/A | | LV836671SP | MN Diagnostic undervoltage release - 200/250 V AC/DC - for MTZ - spare part | N/A | No |
| N/A | | LV836673SP | MN Diagnostic undervoltage release - 380/480 V AC - for MTZ - spare part | N/A | No |
| 47069 | SPARE PARTS 3P FRONT CONNECTION KIT FOR | LV847069SP | Front top or bottom connection - for MTZ1 06-16 - 3P fixed - spare part | Yes | Yes |
| 47070 | SPARE PARTS 4P FRONT CONNECTION KIT FOR | LV847070SP | Front top or bottom connection - for MTZ1 06-16 - 4P fixed - spare part | Yes | Yes |
| 47071 | CHASSIS 3WIRE AUX TERMIN. NT X30 | LV847071SP | 3 wires terminal block - 30 parts - for MasterPact MTZ1 - drawout SPARE PART | Yes | Yes |
| 47072 | CHASSIS 6WIRE AUX TERMIN. NT X10 | LV847072SP | 6 wires terminal block - 10 parts - for MasterPact MTZ1 - drawout SPARE PART | Yes | Yes |
| 47074 | 3-WIRE AUXILIARY TERMINAL BLOCK FOR FIXED NT/NW SPARE PART | LV847074SP [2] | 3 wires terminal block - 1 part - for MasterPact MTZ - fixed - spare part | Yes | Yes |
| 47076 | NT AUXILIARY CONTACT | LV847076SP | ON/OFF indication contact 1 OF - 6 A/240 VAC - for MTZ1 spare part | Yes | Yes |
| 47077 | NT PRE-WIRED LOW-LEVEL AUXILIARY CONTACT | LV847077SP | ON/OFF indication contact 1 OF - low level - for MTZ1 spare part | Yes | Yes |
| 47080 | READY-TO-CLOSE CONTACT | LV847080SP | PF ready-to-close contact - 5 A/240 VAC - for MTZ1/MTZ2/MTZ3 spare part | Yes | Yes |
| 47081 | LOW-LEVEL READY-TO-CLOSE CONTACT | LV847081SP | PF ready-to-close contact - low level - for MTZ1 spare part | Yes | Yes |
| 47092 | SPARE PARTS NT CHARGING HANDLE | LV847092SP | Spring charging handle - for MasterPact MTZ1 spare part | No | No |
| 47094 | SPARE PARTS NT 3P/4P FRONT COVER | LV847094SP | Front cover - for MasterPact MTZ1 - 3P spare part | No | No |
| 47095 | SPARE PARTS NT H1 ARC CHUTE | LV847095SP | Arc chute for MasterPact MTZ1 H1/H2/H4 spare part | Yes | Yes |
| 47098 | SPARE PARTS NT RACKING HANDLE | LV847098SP | Racking handle - for MasterPact MTZ1 spare part | Yes | Yes |
| 47335 | ARC CHUTE INSULATING SCREEN FOR 3P FIXED NT | LV847335SP | Arc chute screen for MasterPact MTZ1 - 3P fixed front connected spare part | Yes | Yes |
| 47336 | ARC CHUTE INSULATING SCREEN FOR 4P FIXED NT | LV847336SP | Arc chute screen for MasterPact MTZ1 - 4P fixed front connected spare part | Yes | Yes |
| 47514 | OFF POSITION LOCKING BY PADLOCKS AND BPFE SUPPORT | LV847514SP | OFF-position locking - padlocking device+BPFE support - for MTZ1 spare part | No | No |
| 47515 | OFF POSITION LOCKING KIT FOR PROFALUX KEYLOCK AND BPFE SUPPORT | LV847515SP | OFF-position locking - Profalux/Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47516 | OFF POSITION LOCKING KIT FOR RONIS KEYLOCK AND BPFE SUPPORT | LV847515SP | OFF-position locking - Profalux/Ronis adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47517 | OFF POSITION LOCKING KIT FOR KIRK KEYLOCK AND BPFE SUPPORT | LV847517SP | OFF-position locking - Kirk adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47518 | OFF POSITION LOCKING KIT FOR CASTELL KEYLOCK AND BPFE SUPPORT | LV847518SP | OFF-position locking - Castell adaptation kit w/o keylock - for MTZ1 spare part | Yes | Yes |
| 47829 | 2 ADDITIONAL SUPPORT BRACKETS FOR VERT. MOUNT FIXED BREAKER | LV847829SP | 2 Brackets for mounting on a back plate - for MTZ2/MTZ3 - fixed spare part | Yes | Yes |
| 47849 | 3-WIRE AUXILIARY TERMINAL BLOCK FOR DRAWOUT NW SPARE PART | LV847849SP [2] | 3 wires terminal block - 1 part - for MasterPact MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 47850 | 6-WIRE AUXILIARY TERMINAL BLOCK FOR DRAWOUT NW | LV847850SP | 6 wires terminal block - 1 part - for MasterPact MTZ2/MTZ3 - drawout SPARE PART | Yes | Yes |
| 47888 | motormechanism MCH 24 to 30 V DC spare part | LV847888SP | MCH gear motor - 24/30 V DC - spare part | Yes | Yes |
| 47889 | motormechanism MCH 48 V DC and AC spare part | LV847889SP | MCH gear motor - 48 V AC/DC - spare part | Yes | Yes |
| 47890 | motormechanism MCH 100 to 125 V DC spare part | LV847890SP | MCH gear motor - 100/125 V DC - spare part | Yes | Yes |
| 47891 | motormechanism MCH 200 to 250 V DC | LV847891SP | MCH gear motor - 200/250 V DC - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47893 | motormechanism MCH 100 to 130 V AC | LV847893SP | MCH gear motor - 100/130 V AC - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47894 | motormechanism MCH 200 to 240 V AC | LV847894SP | MCH gear motor - 200/240 V AC - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47895 | motormechanism MCH 277 V AC | LV847895SP | MCH gear motor - 77 V AC - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47896 | motormechanism MCH 380/415 V AC | LV847896SP | MCH gear motor - 380/415 V AC - for MTZ2/MTZ3 spare part | Yes | Yes |

[1] Need to disconnect the shield at ENCT level.

[2] Must be ordered with LV833118SP for MTZ1 or LV847904SP for MTZ2/MTZ3, in the case of diag & com coils.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|--------------------|--------------------|
| 47897 | motormechanism MCH 400/440/480 V AC | LV847897SP | MCH gear motor - 440/480 V AC - for MTZ2/MTZ3 - spare part | Yes | Yes |
| 47898 | CHASSIS 3WIRE AUX TERMIN. NW X30 | LV847898SP | 3 wires terminal block - 30 parts - for MasterPact MTZ2/MTZ3 - drawout SPARE PART | Yes | Yes |
| 47899 | CHASSIS 6WIRE AUX TERMIN. NW X10 | LV847899SP | 6 wires terminal block - 10 parts - for MasterPact MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 47900 | JUMPERS X10 | LV847900SP | Jumpers (10 parts) - for MTZ1/MTZ2/MTZ3 - spare part | Yes | Yes |
| | | LV847904SP | Wiring kit for diag & com coil - for MTZ2/MTZ3 - spare part | N/A | No |
| 47914 | DOOR INTERLOCK SPARE PART | LV847914SP | Door interlock right-/left-hand side VPEC - for MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 47915 | SDE CONTACT NUM 2 SPARE PART | LV847915SP | Additional SDE fault-trip contact - 6 A/240 VAC - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47916 | LOW-LEVEL SDE CONTACT NUM 2 SPARE PART | LV847916SP | Additional SDE fault-trip contact - low level - for MTZ2/MTZ3 spare part | Yes | Yes |
| 47926 | CABLE-TYPE INTERLOCK PLATE FOR FIXED OR DRAWOUT BREAKER | LV847926SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/drawout spare part | Yes | Yes |
| 47930 | 2 ROD-TYPE INTERLOCK PLATES FOR FIXED OR DRAWOUT NW | LV847930SP | 2 rod interlocking adaptation fixture - for MTZ2/MTZ3 - spare part | Yes | Yes |
| 47932 | SPARE PARTS 3P | LV847932SP | Front bottom connection - for MTZ2 08-16 - 3P fixed - spare part | Yes | Yes |
| 47933 | SPARE PARTS 4P | LV847933SP | Front bottom connection - for MTZ2 08-16 - 4P fixed - spare part | Yes | Yes |
| 47935 | SPARE PARTS N1 H1 H2 ARC CHUTE | LV847935SP | Arc chute for MasterPact MTZ2 - 3P/4P spare part | Yes | Yes |
| 47936 | SPARE PARTS H3 ARC CHUTE | LV847936SP | Arc chute for MasterPact MTZ3 - 3P/4P spare part | Yes ^[2] | Yes ^[2] |
| 47937 | SPARE PARTS L1 ARC CHUTE | LV847937SP | Arc chute for MasterPact MTZ2 L1 - 3P/4P spare part | Yes | Yes |
| 47939 | SPARE PARTS 3P/4P NW FRONT COVER | LV847939SP | Front cover - for MasterPact MTZ2/MTZ3 - 3P/4P spare part | No | No |
| 47940 | SPARE PARTS NW CHARGING HANDLE | LV847940SP | Spring charging handle - for MasterPact MTZ2/MTZ3 spare part | No | No |
| 47942 | SPARE PARTS 3P | LV847942SP | Front bottom connection - for MTZ2 20-32 - 3P fixed - spare part | Yes | Yes |
| 47943 | SPARE PARTS 4P | LV847943SP | Front bottom connection - for MTZ2 20-32 - 4P fixed - spare part | Yes | Yes |
| 47944 | SPARE PARTS RACKING HANDLE | LV847944SP | Racking handle - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 47960 | SPARE PARTS 3P FRONT CONN.KIT FOR 800/16 | LV847960SP | Front top or bottom connection - for MTZ2 08-16 - 3P drawout - spare part | Yes | Yes |
| 47961 | SPARE PARTS 4P FRONT CONN.KIT FOR 800/16 | LV847961SP | Front top or bottom connection - for MTZ2 08-16 - 4P drawout - spare part | Yes | Yes |
| 47962 | SPARE PARTS 3P FRONT CONN.KIT FOR 2000/3 | LV847962SP | Front top or bottom connection - for MTZ2 20-32 - 3P drawout - spare part | Yes | Yes |
| 47963 | SPARE PARTS 4P FRONT CONN.KIT FOR 2000/3 | LV847963SP | Front top or bottom connection - for MTZ2 20-32 - 4P drawout - spare part | Yes | Yes |
| 47964 | SPARE PARTS 3P REAR CONN. KIT FOR 800/20 | LV847964SP | Rear top or bottom connection - for MTZ2 08-20 - 3P fixed/drawout - spare part | Yes | Yes |
| 47965 | SPARE PARTS 4P FRONT CONN. KIT FOR 800/2 | LV847965SP | Rear top or bottom connection - for MTZ2 08-20 - 4P fixed/drawout - spare part | Yes | Yes |
| 47966 | SPARE PARTS 3P REAR CONN.KIT FOR 2500/32 | LV847966SP | Rear top or bottom connection - for MTZ2 25-32 - 3P fixed/drawout - spare part | Yes | Yes |
| 47967 | SPARE PARTS 4P FRONT CONN.KIT FOR 2500/3 | LV847967SP | Rear top or bottom connection - for MTZ2 25-32 - 4P fixed/drawout - spare part | Yes | Yes |
| 47968 | SPARE PARTS 3P VERT REAR CONN. KIT FOR 4 | LV847968SP | Rear connection vertical - for MTZ3 40 - 3P fixed or drawout - spare part | Yes | Yes |
| 47969 | SPARE PARTS 4P VERT REAR CONN. KIT FOR 4 | LV847969SP | Rear connection vertical - for MTZ3 40 - 4P fixed or drawout - spare part | Yes | Yes |
| 47970 | SPARE PARTS 3P HOR REAR CONN. KIT FOR 40 | LV847970SP | Rear connection horizontal - for MTZ2 40 - 3P fixed or drawout - spare part | Yes | Yes |
| 47971 | SPARE PARTS 4P HOR REAR CONN. KIT FOR 40 | LV847971SP | Rear connection horizontal - for MTZ2 40 - 4P fixed or drawout - spare part | Yes | Yes |
| 47990 | SPARE PARTS 3P FRONT CONN.KIT FOR 800/16 | LV847990SP | Front top connection - for MTZ2 08-16 - 3P fixed - spare part | Yes | Yes |
| 47991 | SPARE PARTS 4P FRONT CONN.KIT FOR 800/16 | LV847991SP | Front top connection - for MTZ2 08-16 - 4P fixed - spare part | Yes | Yes |
| 47992 | SPARE PARTS 3P FRONT CONN.KIT FOR 2000/32 | LV847992SP | Front top connection - for MTZ2 20-32 - 3P fixed - spare part | Yes | Yes |
| 47993 | SPARE PARTS 4P FRONT CONN.KIT FOR 2000/32 | LV847993SP | Front top connection - for MTZ2 20-32 - 4P fixed - spare part | Yes | Yes |
| 48182 | CT neutral or ground fault protection for NW 40b to 63 | LV848182SP | CT neutral or ground fault protection - 4000/6300A - for MTZ2/MTZ3 spare part | Yes ^[1] | No |
| 48202 | REMOTE RESET 100/130 VAC FOR FIXED BREAKER | LV848202SP | RES electrical remote reset - 100-130 V AC - for MTZ2/MTZ3 - fixed spare part | Yes | Yes |
| 48203 | REMOTE RESET 200/240 VAC FOR FIXED BREAKER | LV848203SP | RES electrical remote reset - 200-240 V AC - for MTZ2/MTZ3 - fixed spare part | Yes | Yes |
| 48421 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 800/1600A 3P | LV848421SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 3P fixed SPARE PART | Yes | Yes |
| 48422 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 2000/3200A 3P | LV848422SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 3P fixed SPARE PART | Yes | Yes |
| 48424 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 800/1600A 4P | LV848424SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 4P fixed SPARE PART | Yes | Yes |

^[1] Need to disconnect the shield at ENCT level.^[2] Not compatible with MTZ2 H10/HA10. For MTZ2 H10/HA10 use LV847869SP.

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|--|------------------------------|--|----------------|----------------|
| 48425 | DISCONNECTABLE FRONT CONNECTION ADAPTATION 2000/3200A 4P | LV848425SP | Disconnectable front connection adaptor - for MasterPact MTZ2/MTZ3 - 4P fixed SPARE PART | Yes | Yes |
| 48464 | DISCONNECTABLE FRONT CONNECTION ADAPTATI | LV848421SP | Disconnectable front connection adaptor - for MTZ2 08-16 - 3P fixed - spare part | Yes | Yes |
| 48465 | DISCONNECTABLE FRONT CONNECTION ADAPTATI | LV848422SP | Disconnectable front connection adaptor - for MTZ2 20-32 - 3P fixed - spare part | Yes | Yes |
| 48466 | DISCONNECTABLE FRONT CONNECTION ADAPTATI | LV848424SP | Disconnectable front connection adaptor - for MTZ2 08-16 - 4P fixed - spare part | Yes | Yes |
| 48467 | DISCONNECTABLE FRONT CONNECTION ADAPTATI | LV848425SP | Disconnectable front connection adaptor - for MTZ2 20-32 - 4P fixed - spare part | Yes | Yes |
| 48472 | REMOTE RESET 100/130 VAC FOR DRAWOUT BREAKER | LV848472SP | RES electrical remote reset - 100-130 V AC - for MTZ2/ MTZ3 - drawout spare part | Yes | Yes |
| 48473 | REMOTE RESET 200/250 VAC FOR DRAWOUT BREAKER | LV848473SP | RES electrical remote reset - 200-240 V AC - for MTZ2/ MTZ3 - drawout spare part | Yes | Yes |
| 48477 | 1 EF CONTACT FOR DRAWOUT BREAKER(CLOSED/ | LV848477SP | EF connected/closed contact - 5 A/240 V AC - for MTZ2/ MTZ3 - drawout spare part | Yes | Yes |
| 48478 | 1 LOW-LEVEL EF CONTACT FOR D/O BREAKER (| LV848478SP | EF connected/closed contact - low level - for MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 48534 | BPFE ELECTRICAL CLOSING PUSHBUTTON | LV848534SP | BPFE electrical closing pushbutton - 1 NO - for MTZ2/MTZ3 - spare part | No | No |
| 48535 | OPERATION COUNTER MECHANICAL 5 DIGIT DISPLAY FOR NW 08 TO 63 | LV848535SP | CDM operation counter - mechanical 5 digit display - for MTZ2/MTZ3 spare part | Yes | Yes |
| 48536 | PUSHBUTTON PADLOCKING DEVICE | LV848536SP | Pushbutton locking cover - for MasterPact MTZ2/MTZ3 spare part | No | No |
| 48539 | OFF POSITION PADLOCKING | LV848539SP | OFF-position locking - padlock - for MTZ2/MTZ3 spare part | No | No |
| 48556 | EARTH CONNECTION FOR FIXED BRACKET | LV848556SP | Earth connection - for fixed bracket spare part | Yes | Yes |
| 48557 | EARTH CONNECTION FOR BREAKER | LV848557SP | Earth connection - for breaker spare part | Yes | Yes |
| 48560 | ACTUATOR FOR ADDITIONAL CARRIAGE SWITCHES | LV848560SP | Actuator for additional CE/CD/CT position contact - for MTZ2/MTZ3 spare part | Yes | Yes |
| 48564 | PROFALUX/RONIS DISCON. POSITION LOCKING KIT (W/O KEYLOCK) | LV848564SP | Chassis locking - Profalux/Ronis adapt kit w/o keylock - for MTZ2/3 spare part | No | Yes |
| 48565 | KIRK DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV848565SP | Chassis locking - Kirk adaptation kit w/o keylock - for MTZ2/ MTZ3 spare part | No | Yes |
| 48566 | CASTELL DISCONNECTED POSITION LOCKING KIT (W/O KEYLOCK) | LV848566SP | Chassis locking - Castell adaptation kit w/o keylock - for MTZ2/MTZ3 spare part | Yes | Yes |
| 48579 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) | LV848579 | DOOR INTERLOCK (RIGHT-HAND SIDE OF CHASSIS) SPARE PART | Yes | Yes |
| 48580 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) | LV848580 | DOOR INTERLOCK (LEFT-HAND SIDE OF CHASSIS) SPARE PART | Yes | Yes |
| 48591 | 1 SHUTTER LOCKING BLOCK | LV848591SP | Shutter locking block - for MasterPact MTZ2/MTZ3 - spare part | Yes | Yes |
| 48596 | AUXILIARY TERMINAL SHIELD FOR MTZ2 800/4000A 4P | LV848596SP | Auxiliary terminal shield - for MasterPact MTZ2 - 4P spare part | Yes | Yes |
| 48597 | AUXILIARY TERMINAL SHIELD FOR MTZ3 4000/6300A 3P | LV848597SP | Auxiliary terminal shield - for MasterPact MTZ3 - 3P spare part | Yes | Yes |
| 48598 | AUXILIARY TERMINAL SHIELD FOR MTZ3 4000/6300A 4P | LV848598SP | Auxiliary terminal shield - for MasterPact MTZ3 - 4P spare part | Yes | Yes |
| 48599 | 3 INTERPHASE BARRIERS FOR FIXED BREAKER | LV848599SP | 3 interphase barriers - for MTZ2/3 rear connection - 3P/4P fixed - spare part | Yes | Yes |
| 48600 | 3 INTERPHASE BARRIERS FOR D/O BREAKER | LV848600SP | 3 interphase barriers - for MTZ2/3 rear connection - 3P/4P drawout - spare part | Yes | Yes |
| 48601 | ESCUTCHEON FOR FIXED BREAKER | LV848601SP | Escutcheon - for MasterPact MTZ2/MTZ3 - fixed spare part | Yes | Yes |
| 48603 | ESCUTCHEON FOR DRAWOUT BREAKER | LV848603SP | Escutcheon - for MasterPact MTZ2/MTZ3 - drawout spare part | Yes | Yes |
| 48604 | TRANSPARENT COVER FOR ESCUTCHEON ON DRAWOUT BREAKER | LV848604SP | IP54 transparent cover - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48605 | ESCUTCHEON BLANKING PLATE | LV848605SP | Escutcheon blanking plate - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48608 | cable interlocking for fixed or drawout MasterPact NW | LV848608SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48609 | cable interlocking for fixed or drawout MasterPact NW | LV848609SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48610 | cable interlocking for fixed or drawout MasterPact NW | LV848610SP | Cable interlocking - for MasterPact MTZ2/MTZ3 - fixed/ drawout spare part | Yes | Yes |
| 48614 | CABLE-TYPE DOOR INTERLOCKING FOR FIXED OR DRAWOUT BREAKER | LV848614SP | Cable - type door interlock - for MasterPact MTZ2/MTZ3 spare part | Yes | Yes |
| 48721 | SAFETY SHUTTERS 3P KIT 800-4000A | LV848721SP | Safety shutters + locking blocks - for MasterPact MTZ2 - 3P spare part | Yes | Yes |
| 48722 | SAFETY SHUTTERS 3P KIT 4000B-6300A | LV848722SP | Safety shutters + locking blocks - for MasterPact MTZ3 - 3P spare part | Yes | Yes |
| 48723 | SAFETY SHUTTERS 4P KIT 800-4000A | LV848723SP | Safety shutters + locking blocks - for MasterPact MTZ2 - 4P spare part | Yes | Yes |
| 48724 | SAFETY SHUTTERS 4P KIT 4000B-6300A | LV848724SP | Safety shutters + locking blocks - for MasterPact MTZ3 - 4P spare part | Yes | Yes |
| 48891 | MDGF SUMMING MODULE | LV848891SP | MDGF Summing module - for MasterPact MTZ2/MTZ3 - fixed/drawout spare part | Yes [1] | Yes |
| 54440 | CIRCUIT BREAKER EXT POWER SUPPLY 24/30VD | 54440 | CIRCUIT BREAKER EXT POWER SUPPLY 24/30VD | Yes | Yes |

[1] Need to change the cabling on the MDGF.

Compatibility of components

MasterPact NT/NW ↔ MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|---|------------------------------|--|----------------|----------------|
| 54441 | CIRCUIT BREAKER EXT POWER SUPPLY 48/60CD | 54441 | CIRCUIT BREAKER EXT POWER SUPPLY 48/60CD | Yes | Yes |
| 54442 | CIRCUIT BREAKER EXT POWER SUPPLY 100/125VDC | 54442 | CIRCUIT BREAKER EXT POWER SUPPLY 100/125VDC | Yes | Yes |
| 54443 | POWER SUPPLY 110 130 VAC | 54443 | POWER SUPPLY 110 130 VAC | Yes | Yes |
| 54444 | POWER SUPPLY 200 240 VAC | 54444 | POWER SUPPLY 200 240 VAC | Yes | Yes |
| 54445 | POWER SUPPLY 380 415 VAC | 54445 | POWER SUPPLY 380 415 VAC | Yes | Yes |
| 54446 | CIRCUIT BREAKER 24V BATTERY | | | No | N/A |
| 64906 | 1 CLUSTER FOR CHASSIS | LV864906SP | Cluster for chassis - for MasterPact MTZ - 3P/4P spare part | Yes | Yes |
| 64909 | PROFALUX DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV864909SP | Chassis locking - 1 Profalux lock 2 keys + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 64910 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV864910SP | Chassis locking - 2 Profalux locks 1 key + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 64911 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV864911SP | Chassis locking - 2 Profalux locks 2 diff keys + adapt kit - for MTZ1 spare part | Yes | Yes |
| 64912 | RONIS DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV864912SP | Chassis locking - 1 Ronis keylock 2 keys + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 64913 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV864913SP | Chassis locking - 2 Ronis locks 1 key + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 64914 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV864914SP | Chassis locking - 2 Ronis locks 2 diff keys + adapt kit - for MTZ1 spare part | Yes | Yes |
| 64917 | BPFE ELECTRICAL CLOSING PUSHBUTTON | LV864917SP | BPFE electrical closing pushbutton - 1 NO - for MTZ1 - spare part | No | No |
| 64918 | OFF POSITION LOCKING WITH 1 PROFALUX KEYLOCK | LV864918SP | OFF-position locking - 1 Profalux lock 2 keys + adapt kit - for MTZ1 spare part | Yes | Yes |
| 64919 | OFF POSITION LOCKING WITH 2 PROFALUX KEYLOCKS (SAME KEY) | LV864919SP | OFF-position locking - 2 Profalux locks 1 key + adapt kit - for MTZ1 spare part | Yes | Yes |
| 64920 | OFF POSITION LOCKING WITH 1 RONIS KEYLOCK | LV864920SP | OFF-position locking - 1 Ronis lock 1 key + adaptation kit - for MTZ1 spare part | Yes | Yes |
| 64921 | OFF POSITION LOCKING WITH 2 RONIS KEYLOCKS (SAME KEY) | LV864921SP | OFF-position locking - 2 Ronis locks 1 key + adapt kit - for MTZ1 spare part | Yes | Yes |
| 64922 | 1 BLOCK OF 4 OF CONTACTS SPARE PART | LV864922SP | ON/OFF indication contact block 4 OF - 5 A/240 VAC - for MTZ2/MTZ3 - spare part | Yes | Yes |
| 64925 | PROFALUX/RONIS OFF POSITION LOCKING KIT (W/O KEYLOCK) | LV848541SP | OFF-position locking - Profalux/Ronis kit + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64926 | KIRK OFF POSITION LOCKING KIT (W/O KEYLOCK) | LV848542SP | OFF-position locking - Kirk adaptation kit + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64927 | CASTELL OFF POSITION LOCKING KIT(W/O KEYLOCK) | LV848543SP | OFF-position locking - Castell adapt kit + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64928 | PROFALUX OFF POSITION LOCKING 1 KEYLOCK | LV864928SP | OFF-position locking - 1 Profalux keylock + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64929 | PROFALUX OFF POSITION LOCKING 1 KEYLOCK AND 1 IDENT EXTRA KEYLOCK | LV864929SP | OFF-position locking - 2 Profalux locks 1 key + padlock - for MTZ2/3 spare part | No | No |
| 64930 | PROFALUX OFF POSITION LOCKING 2 DIFFERENT KEYLOCKS | LV864930SP | OFF-position locking - 2 Profalux locks 2 keys + padlock - for MTZ2/3 spare part | No | No |
| 64931 | RONIS OFF POSITION LOCKING 1 KEYLOCK | LV864931SP | OFF-position locking - 1 Ronis keylock + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64932 | RONIS OFF POSITION LOCKING 1 KEYLOCK AND 1 IDENT EXTRA KEYLOCK | LV864932SP | OFF-position locking - 2 Ronis locks 1 key + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64933 | RONIS OFF POSITION LOCKING 2 DIFFERENT KEYLOCKS SPARE PART | LV864933SP | OFF-position locking - 2 diff Ronis locks + padlock - for MTZ2/MTZ3 spare part | No | No |
| 64934 | PROFALUX DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV864934SP | Chassis locking - 1 Profalux lock 2 keys + adapt kit - for MTZ2/MTZ3 spare part | Yes | Yes |
| 64935 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV864935SP | Chassis locking - 2 Profalux locks 1 key + adapt kit - for MTZ2/MTZ3 spare part | Yes | Yes |
| 64936 | PROFALUX DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV864936SP | Chassis locking - 2 Profalux locks 2 diff keys+adapt kit - for MTZ2/3 spare part | Yes | Yes |
| 64937 | RONIS DISCONNECTED POSITION LOCKING WITH 1 KEYLOCK | LV864937SP | Chassis locking - 1 Ronis lock 2 keys + adaptation kit - for MTZ/MTZ3 spare part | Yes | Yes |
| 64938 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (SAME KEY) | LV864938SP | Chassis locking - 2 Ronis locks 1 key + adapt kit - for MTZ2/ MTZ3 spare part | Yes | Yes |
| 64939 | RONIS DISC. POSITION LOCKING WITH 2 KEYLOCKS (DIFF. KEYS) | LV864939SP | Chassis locking - 2 Ronis locks 2 diff keys + adapt kit - for MTZ2/3 spare part | Yes | Yes |
| 64940 | RACKING INTERLOCK (LOCKOUT WITH DOOR OPEN) | LV864940SP | Racking interlock VPOC (crank & open door) - for MTZ2/ MTZ3 - drawout spare part | Yes | Yes |
| 64942 | AUXILIARY TERMINAL SHIELD FOR NW800/4000A 3P | LV864942SP | Auxiliary terminal shield - for MasterPact MTZ2 - 3P spare part | Yes | Yes |
| NA | | LV847869SP | Arc chute for MasterPact MTZ2 H10 - 3P/4P spare part | N/A | Yes |
| NA | | LV847905SP | Microswitches OF/SDE/PF and wiring - for MasterPact MTZ2/MTZ3 - spare part | N/A | No |
| NA | | LV847906SP | Microswitches OF/SDE/PF and wiring - for MasterPact MTZ1 - spare part | N/A | No |
| NA | | LV848892 | Restraint Interface Module (RIM) 120Vac | N/A | Yes |
| NA | | LV850053SP | MicroLogic transparent cover - for MicroLogic X - spare part | N/A | No |
| NA | | LV850054SP | Embedded display - for MicroLogic X - spare part | N/A | No |
| NA | | LV850055SP | Mobile Power Pack - for MicroLogic X spare part | N/A | No |
| NA | | LV850056SP | Isolation module - for MX1/XF communicating coils - spare part | N/A | No |

G

Compatibility of components

MasterPact NT/NW MasterPact MTZ

| MasterPact NT/NW Cat. No | Designation | MasterPact MTZ Cat. No | Designation | NT/NW ► MTZ | MTZ ► NT/NW |
|--------------------------------|-------------|------------------------------|---|----------------|----------------|
| NA | | LV850060 | VPS voltage power supply module - for MicroLogic | N/A | No |
| NA | | LV850061SP | ULP port module kit - for MasterPact MTZ2/MTZ3 - fixed spare part | N/A | No |
| NA | | LV850062SP | ULP port module kit - for MasterPact MTZ2/MTZ3 - drawout spare part | N/A | No |
| NA | | LV850063SP | ULP port module kit - for MasterPact MTZ1 - fixed spare part | N/A | No |
| NA | | LV850064SP | ULP port module kit - for MasterPact MTZ1 - drawout spare part | N/A | No |
| NA | | LV850067SP | USB cable (miniUSB/USB) - For MicroLogic X - spare part | N/A | No |
| NA | | LV851001SP | EIFE embedded Ethernet interface - for MTZ1 /MTZ2/MTZ3 - spare part | N/A | No |
| NA | | LV851100SP | EIFE embedded Ethernet interface with accessories - for MTZ1 - spare part | N/A | No |
| NA | | LV851120SP | EIFE accessories - for MTZ1 - spare part | | |
| NA | | LV851200SP | EIFE embedded Ethernet interface with accessories - for MTZ2/MTZ3 - spare part | N/A | No |
| NA | | LV851220SP | EIFE accessories - for MTZ2/MTZ3 - spare part | N/A | No |

G

Notes

G

**Schneider Electric Industries SAS**

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

09/2019

© 2019 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
LVPED516027EN

This document has been
printed on recycled paper

